

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286763

Luminaire Tested: P3AS09R259030D2WDE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286763
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R259030D2WDE010 E3DLP1GPH
Description: 3in Adjustable Dim to Warm LED luminaire with, R25 optic, 3000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 210.0 lumens
Efficiency: N/A
Efficacy: 14.3 lumens/watt
Spacing Criteria (0/90/45): 0.62 / 0.62 / 0.68
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286763
CATALOG NUMBER: P3AS09R259030D2WDE010 E3DLP1GPH

Luminous Intensity Polar Plot

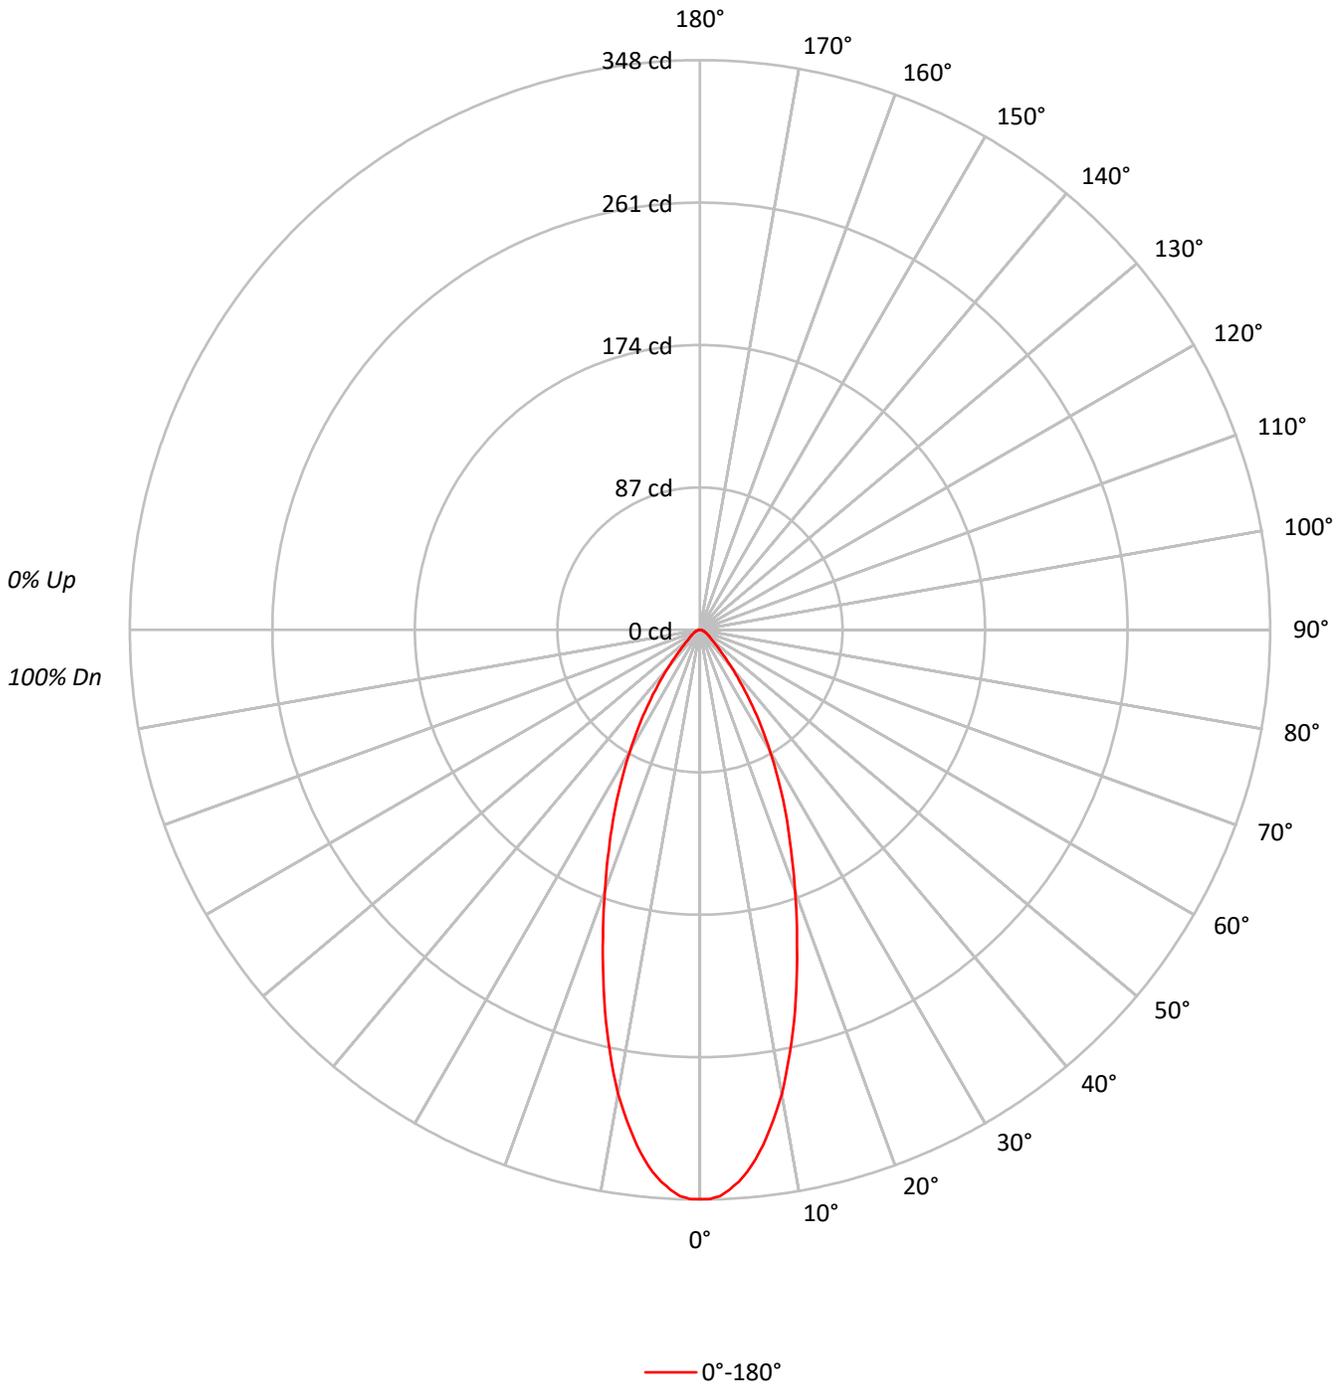



TEST NUMBER: P1286763

CATALOG NUMBER: P3AS09R259030D2WDE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	95	90	86	100	94	89	86	91	87	84	89	86	83	87	84	82	80	80	80	80
4	97	89	84	79	95	88	83	79	86	81	78	84	80	77	82	79	76	75	75	75	75
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70	70	70	70
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	66	66	66	66
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62	62	62	62
8	80	70	65	60	79	70	64	60	69	64	60	68	63	60	67	63	60	58	58	58	58
9	76	67	61	57	75	66	61	57	65	60	57	64	60	57	64	59	56	55	55	55	55
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52	52	52	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	76244
5°	73145
10°	64083
15°	51510
20°	39577
25°	29953
30°	21624
35°	14375
40°	8702
45°	5086
50°	3241
55°	2638
60°	2281
65°	2024
70°	1667
75°	1694
80°	1263
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5086 cd/sqm



TEST NUMBER: P1286763

CATALOG NUMBER: P3AS09R259030D2WDE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.2	14.4
10°-20°	62.7	29.9
20°-30°	56.7	27.0
30°-40°	34.1	16.2
40°-50°	13.5	6.4
50°-60°	6.3	3.0
60°-70°	3.8	1.8
70°-80°	2.0	1.0
80°-90°	0.6	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	149.7	71.3
0°-40°	183.8	87.5
0°-60°	203.6	96.9
0°-90°	210.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	210.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	348	
5°	332	30
15°	227	63
25°	124	57
35°	54	34
45°	16	14
55°	7	6
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1286763
CATALOG NUMBER: P3AS09R259030D2WDE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	347.7
1°	347.7
2°	346.1
3°	342.5
4°	337.9
5°	332.3
6°	325.1
7°	316.9
8°	307.4
9°	297.9
10°	287.8
11°	276.0
12°	263.9
13°	251.8
14°	239.7
15°	226.9
17.5°	196.8
20°	169.6
22.5°	145.0
25°	123.8
27.5°	103.8
30°	85.4
32.5°	68.8
35°	53.7
37.5°	40.9
40°	30.4
42.5°	22.3
45°	16.4
47.5°	12.4
50°	9.5
52.5°	7.9
55°	6.9
57.5°	5.9
60°	5.2
62.5°	4.3
65°	3.9
67.5°	3.3
70°	2.6
72.5°	2.3
75°	2.0
77.5°	1.6
80°	1.0
82.5°	0.7
85°	0.7
87.5°	0.3



TEST NUMBER: P1286763
CATALOG NUMBER: P3AS09R259030D2WDE010 E3DLP1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)