

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286768

Luminaire Tested: P3AS09R259030D2WDE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286768
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R259030D2WDE010 E3DLP1WMH
Description: 3in Adjustable Dim to Warm LED luminaire with, R25 optic, 3000K CCT AND, 90CRI ,
E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 429.0 lumens
Efficiency: N/A
Efficacy: 29.2 lumens/watt
Spacing Criteria (0/90/45): 0.62 / 0.62 / 0.68
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286768

CATALOG NUMBER: P3AS09R259030D2WDE010 E3DLP1WMH

Luminous Intensity Polar Plot

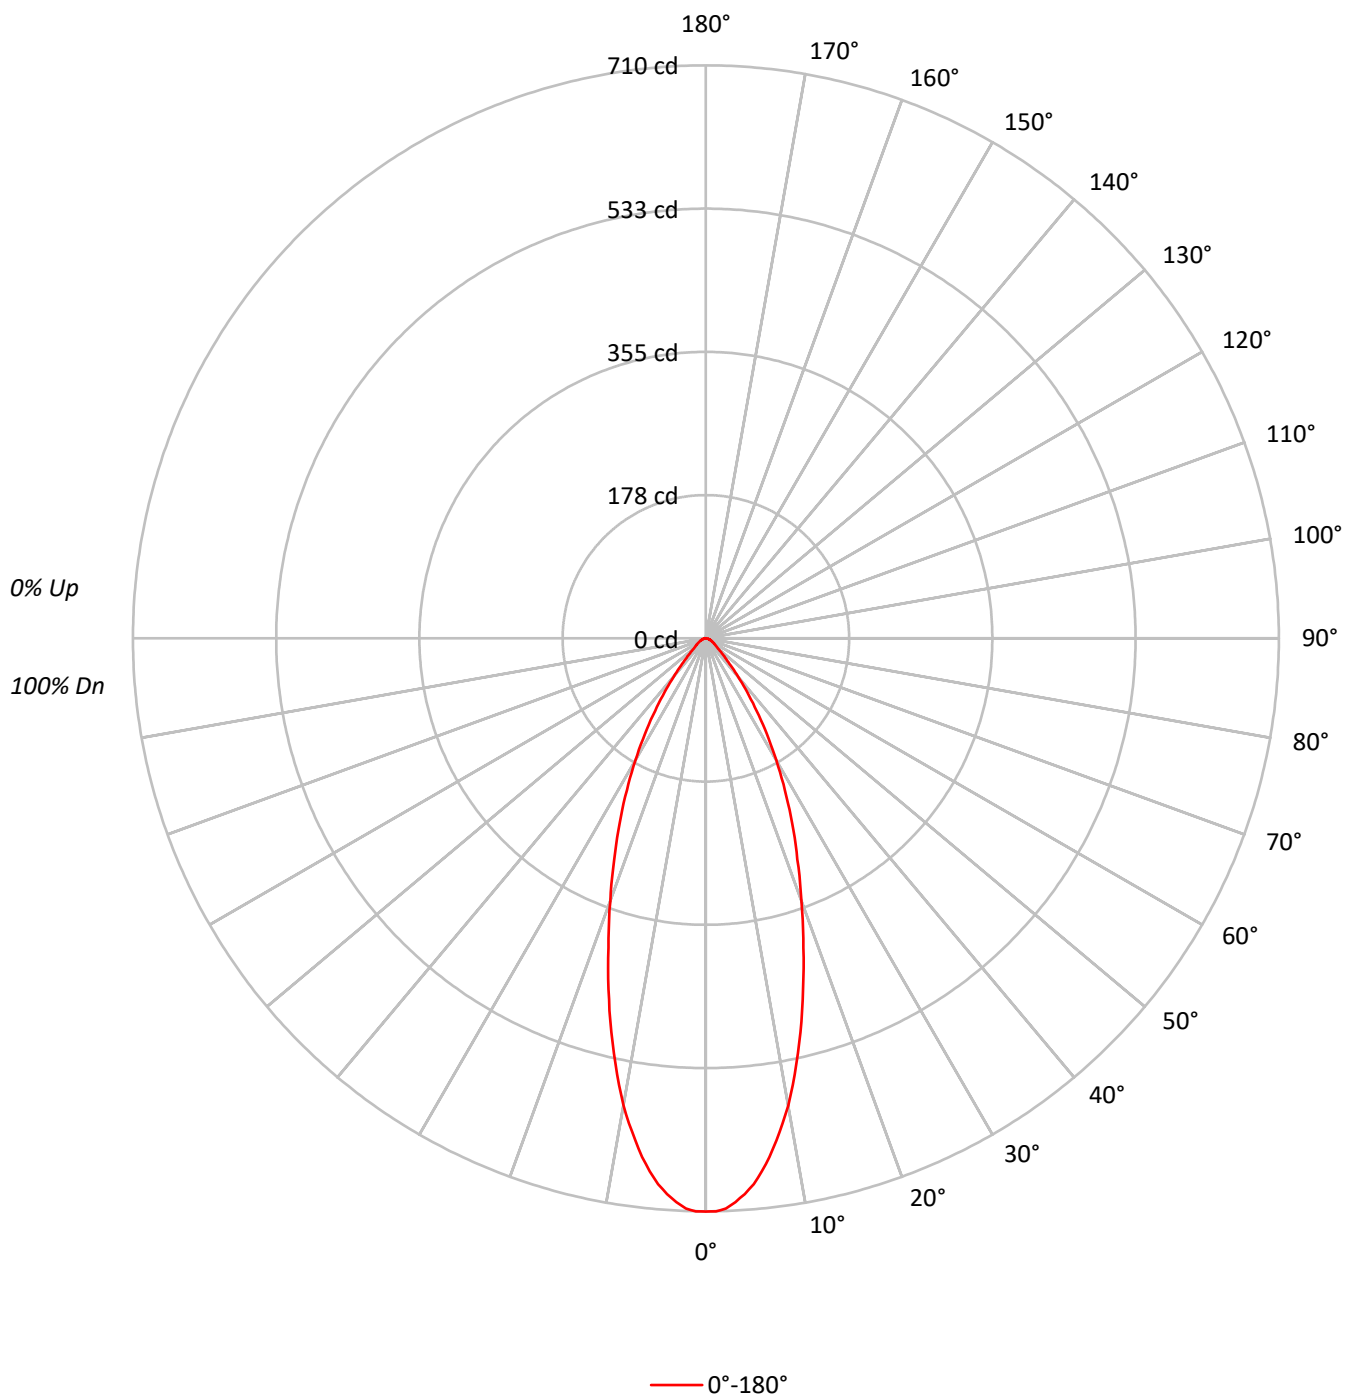

TEST NUMBER: P1286768

CATALOG NUMBER: P3AS09R259030D2WDE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	101		100	99	98		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	95	90	86	100	94	89	86	91	87	84		89	86	83		87
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82
5	92	84	78	74	91	83	77	73	81	76	73		79	75	72		78
6	88	79	73	69	86	78	72	68	77	72	68		75	71	67		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	80	70	65	60	79	70	64	60	69	64	60		68	63	60		67
9	76	67	61	57	75	66	61	57	65	60	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	155755
5°	149416
10°	130904
15°	105222
20°	80834
25°	61165
30°	44209
35°	29366
40°	17805
45°	10358
50°	6618
55°	5352
60°	4693
65°	4151
70°	3462
75°	3389
80°	2526
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 10358 cd/sqm

TEST NUMBER: P1286768

CATALOG NUMBER: P3AS09R259030D2WDE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.8	14.4
10°-20°	128.2	29.9
20°-30°	115.9	27.0
30°-40°	69.6	16.2
40°-50°	27.7	6.4
50°-60°	12.7	3.0
60°-70°	7.8	1.8
70°-80°	4.1	1.0
80°-90°	1.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	305.9	71.3
0°-40°	375.5	87.5
0°-60°	415.9	96.9
0°-90°	429.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	429.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	710	
5°	679	62
15°	464	128
25°	253	116
35°	110	70
45°	33	28
55°	14	13
65°	8	8
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1286768

CATALOG NUMBER: P3AS09R259030D2WDE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	710.3
1°	710.3
2°	706.9
3°	699.6
4°	690.2
5°	678.8
6°	664.1
7°	647.4
8°	628.0
9°	608.6
10°	587.9
11°	563.8
12°	539.1
13°	514.3
14°	489.6
15°	463.5
17.5°	402.0
20°	346.4
22.5°	296.3
25°	252.8
27.5°	212.0
30°	174.6
32.5°	140.5
35°	109.7
37.5°	83.6
40°	62.2
42.5°	45.5
45°	33.4
47.5°	25.4
50°	19.4
52.5°	16.1
55°	14.0
57.5°	12.0
60°	10.7
62.5°	8.7
65°	8.0
67.5°	6.7
70°	5.4
72.5°	4.7
75°	4.0
77.5°	3.3
80°	2.0
82.5°	1.3
85°	1.3
87.5°	0.7



TEST NUMBER: P1286768

CATALOG NUMBER: P3AS09R259030D2WDE010 E3DLP1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)