

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286801

Luminaire Tested: P3AS09R309030D2WDE010 E3PH1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286801
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R309030D2WDE010 E3PH1MW
Description: 3in Adjustable Dim to Warm LED luminaire with, R30 optic, 3000K CCT AND, 90CRI , E3PH1M'
TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 689.0 lumens
Efficiency: N/A
Efficacy: 46.9 lumens/watt
Spacing Criteria (0/90/45): 0.33 / 0.33 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286801
CATALOG NUMBER: P3AS09R309030D2WDE010 E3PH1MW

Luminous Intensity Polar Plot

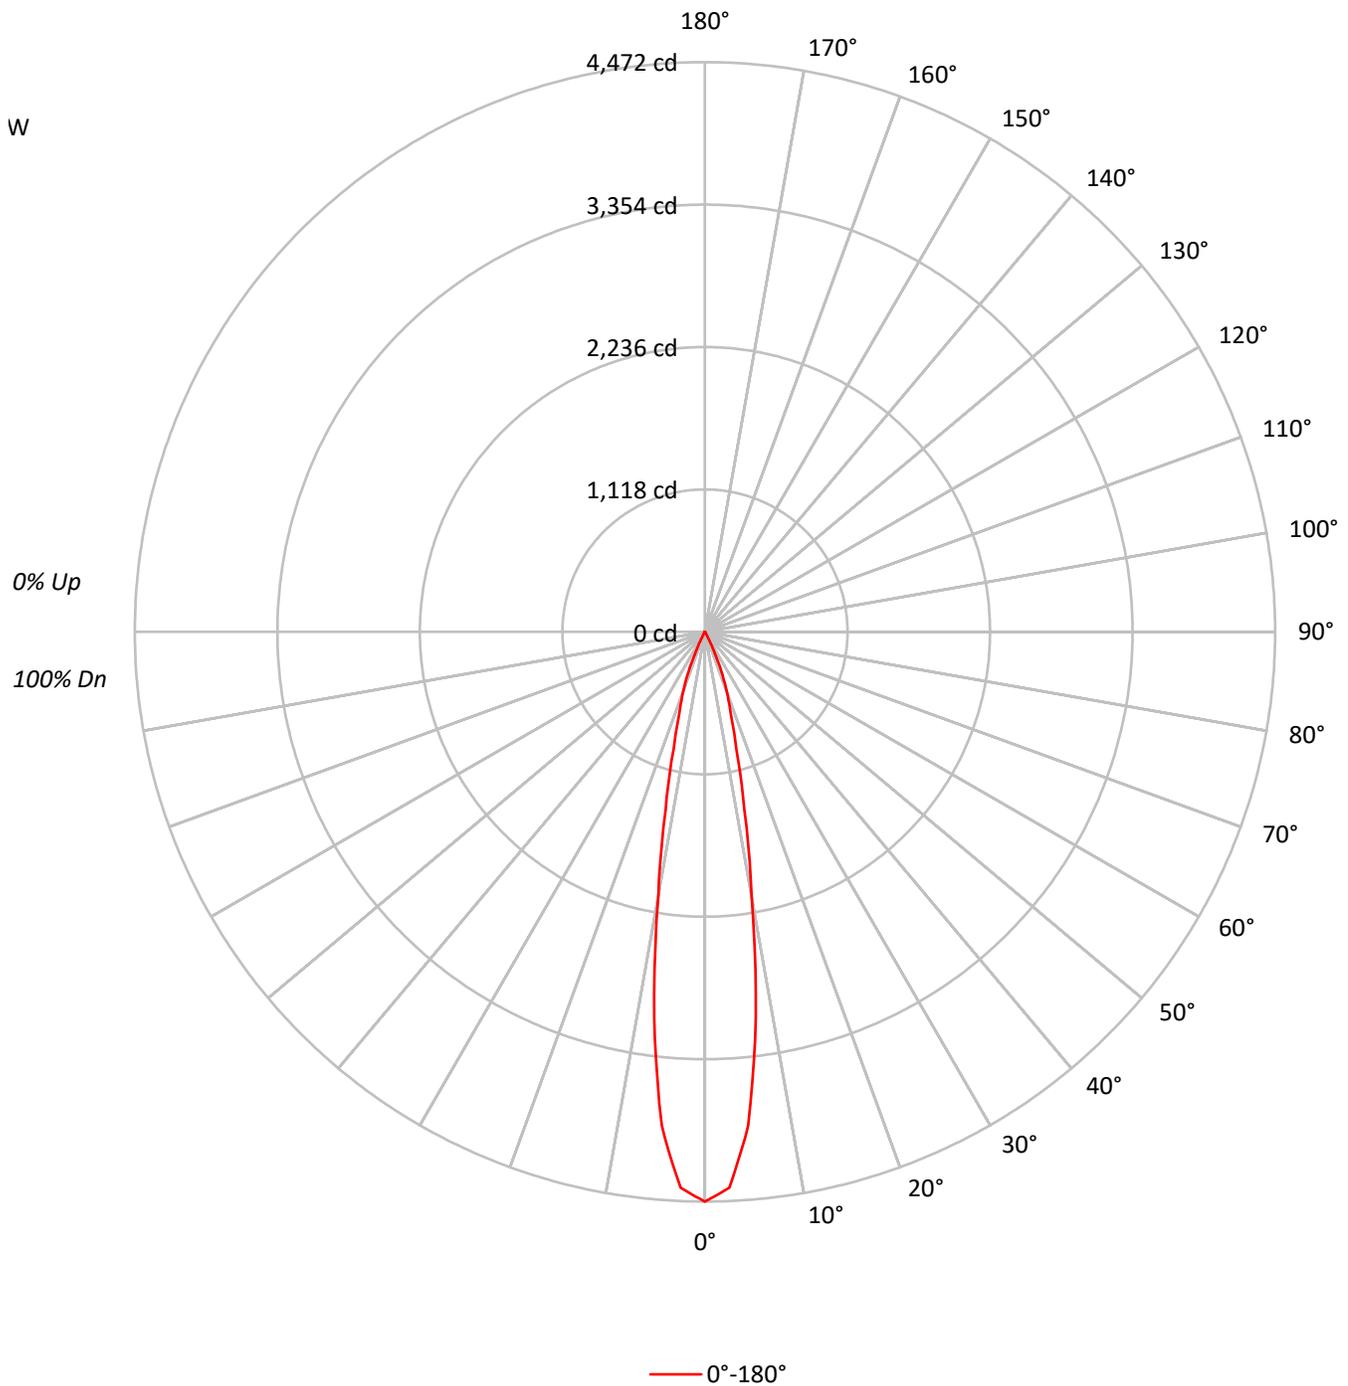



TEST NUMBER: P1286801
 CATALOG NUMBER: P3AS09R309030D2WDE010 E3PH1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	99	97
1	115	113	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	96	95
2	112	109	106	104	110	107	105	103	104	102	100	101	100	98	99	97	96	95	94	94	93
3	109	105	102	99	107	104	101	98	101	99	97	99	97	95	97	95	94	93	92	91	90
4	106	101	98	95	105	100	97	95	98	96	94	97	94	92	95	93	91	89	88	86	84
5	104	98	95	92	102	97	94	91	96	93	91	94	92	90	93	91	89	87	85	83	81
6	101	95	92	89	100	95	91	89	94	91	88	92	90	88	91	89	87	85	83	81	79
7	99	93	89	87	98	92	89	86	91	88	86	90	88	86	89	87	85	83	81	79	77
8	96	91	87	84	96	90	87	84	89	86	84	88	86	84	88	85	83	81	79	77	75
9	94	89	85	82	94	88	85	82	87	84	82	87	84	82	86	84	82	80	78	76	74
10	92	87	83	81	92	86	83	81	86	82	80	85	82	80	84	82	80	78	76	74	72

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	980689
5°	856656
10°	469953
15°	216210
20°	116537
25°	39486
30°	5140
35°	776
40°	286
45°	0
50°	0
55°	0
60°	0
65°	0
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 0 cd/sqm



TEST NUMBER: P1286801

CATALOG NUMBER: P3AS09R309030D2WDE010 E3PH1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	311.8	45.3
10°-20°	285.8	41.5
20°-30°	87.9	12.8
30°-40°	3.3	0.5
40°-50°	0.3	0.0
50°-60°	0.0	0.0
60°-70°	0.0	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	685.4	99.5
0°-40°	688.7	100.0
0°-60°	689.0	100.0
0°-90°	689.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	689.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4472	
5°	3892	312
15°	952	286
25°	163	88
35°	3	3
45°	0	0
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1286801
CATALOG NUMBER: P3AS09R309030D2WDE010 E3PH1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	4472.3
2.5°	4368.0
5°	3891.8
7.5°	3053.4
10°	2110.6
12.5°	1428.6
15°	952.4
17.5°	667.5
20°	499.4
22.5°	336.2
25°	163.2
27.5°	59.9
30°	20.3
32.5°	6.8
35°	2.9
37.5°	1.9
40°	1.0
42.5°	1.0
45°	0.0
47.5°	0.0
50°	0.0
52.5°	0.0
55°	0.0
57.5°	0.0
60°	0.0
62.5°	0.0
65°	0.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)