

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286816

Luminaire Tested: P3AS09R359030D2WDE010 E3DL1WMH

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1286816  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R359030D2WDE010 E3DL1WMH  
Description: 3in Adjustable Dim to Warm LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,  
E3DL1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 703.0 lumens  
Efficiency: N/A  
Efficacy: 47.8 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 14.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1286816

CATALOG NUMBER: P3AS09R359030D2WDE010 E3DL1WMH

### Luminous Intensity Polar Plot

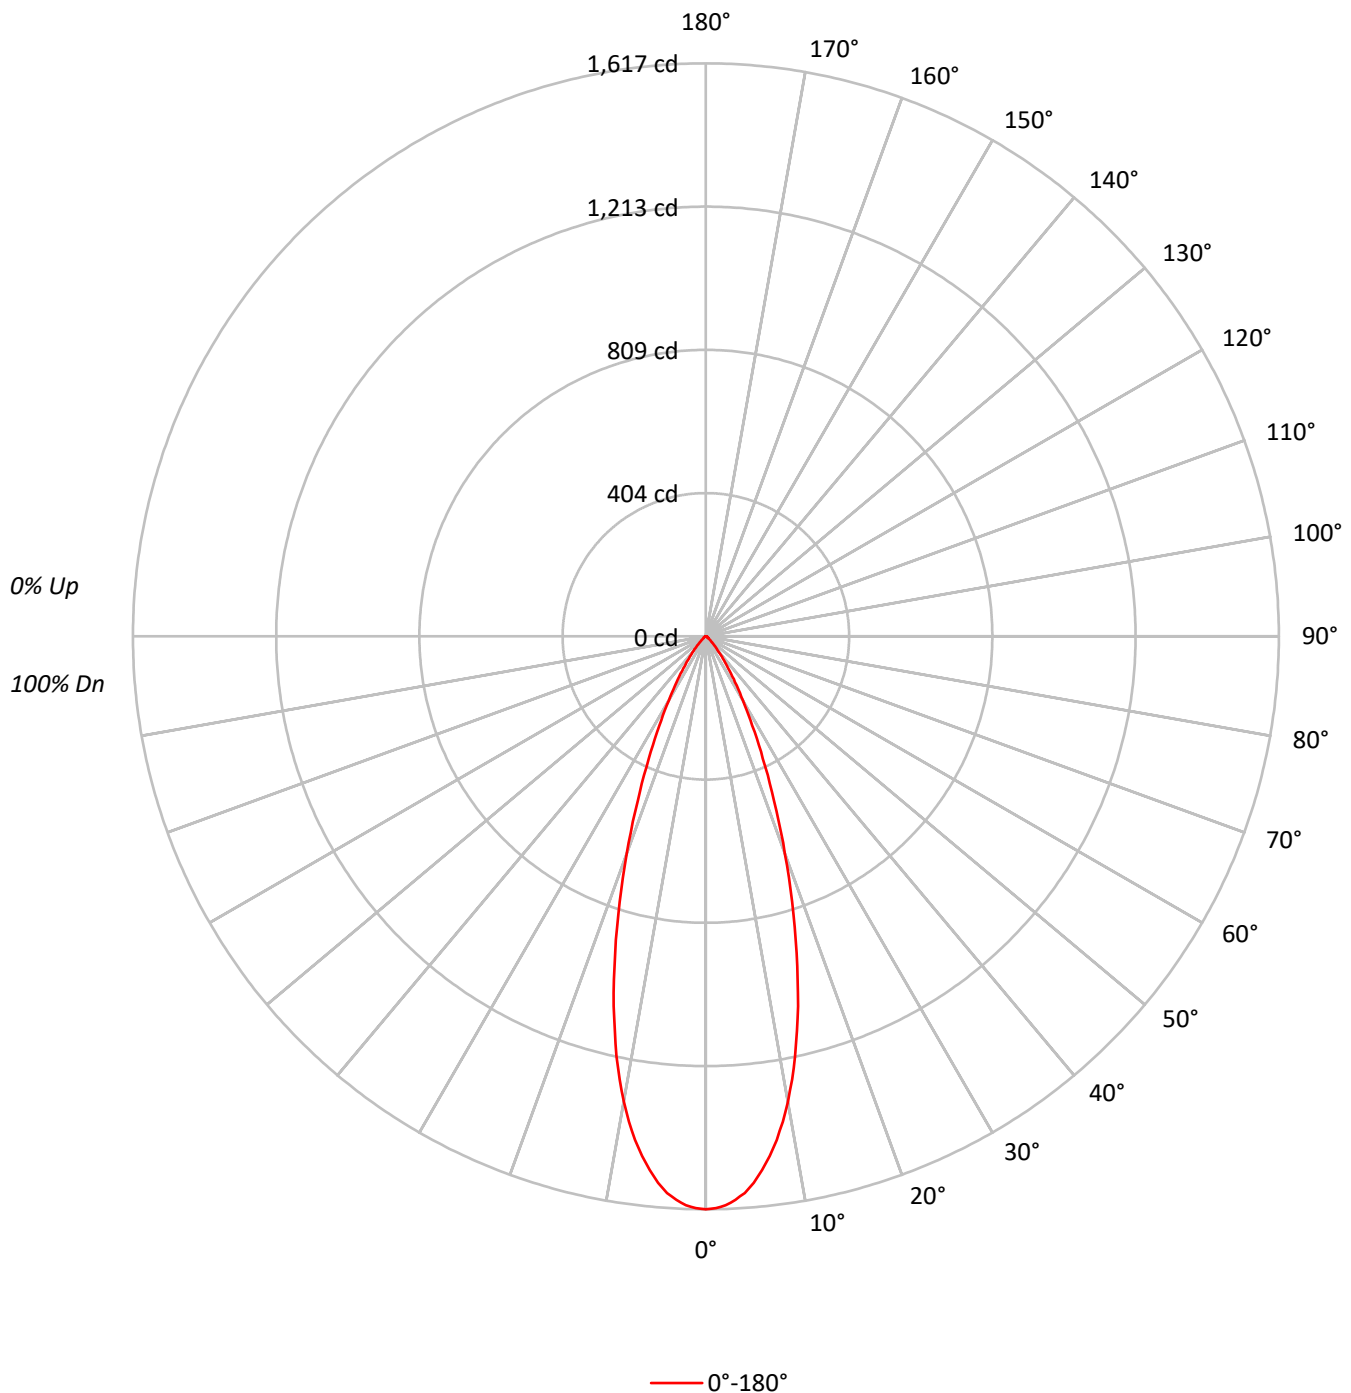

TEST NUMBER: P1286816

CATALOG NUMBER: P3AS09R359030D2WDE010 E3DL1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 114 | 112 | 109 | 107 | 112 | 109 | 107 | 106 | 105 | 104 | 102 |  | 102 | 100 | 99  |  | 98  |
| 2   | 109 | 105 | 101 | 98  | 107 | 103 | 100 | 97  | 100 | 97  | 95  |  | 97  | 95  | 93  |  | 94  |
| 3   | 105 | 99  | 95  | 91  | 103 | 98  | 94  | 90  | 95  | 92  | 89  |  | 93  | 90  | 88  |  | 91  |
| 4   | 100 | 94  | 89  | 85  | 99  | 93  | 88  | 85  | 91  | 87  | 84  |  | 89  | 85  | 83  |  | 87  |
| 5   | 96  | 89  | 84  | 80  | 95  | 88  | 83  | 80  | 86  | 82  | 79  |  | 85  | 81  | 78  |  | 83  |
| 6   | 92  | 85  | 80  | 76  | 91  | 84  | 79  | 76  | 83  | 78  | 75  |  | 81  | 77  | 75  |  | 80  |
| 7   | 89  | 81  | 76  | 72  | 88  | 80  | 75  | 72  | 79  | 75  | 71  |  | 78  | 74  | 71  |  | 77  |
| 8   | 85  | 77  | 72  | 69  | 84  | 77  | 72  | 68  | 76  | 71  | 68  |  | 75  | 71  | 68  |  | 74  |
| 9   | 82  | 74  | 69  | 66  | 81  | 74  | 69  | 65  | 73  | 68  | 65  |  | 72  | 68  | 65  |  | 71  |
| 10  | 79  | 71  | 66  | 63  | 78  | 71  | 66  | 63  | 70  | 66  | 63  |  | 69  | 65  | 62  |  | 69  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 354555 |
| 5°  | 340765 |
| 10° | 296899 |
| 15° | 227402 |
| 20° | 152147 |
| 25° | 92062  |
| 30° | 52818  |
| 35° | 29526  |
| 40° | 15687  |
| 45° | 8094   |
| 50° | 3889   |
| 55° | 3058   |
| 60° | 2938   |
| 65° | 2439   |
| 70° | 2565   |
| 75° | 2288   |
| 80° | 2526   |
| 85° | 1761   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 8094 cd/sqm

TEST NUMBER: P1286816

CATALOG NUMBER: P3AS09R359030D2WDE010 E3DL1WMH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 140.9  | 20.0      |
| 10°-20°   | 272.9  | 38.8      |
| 20°-30°   | 178.7  | 25.4      |
| 30°-40°   | 72.5   | 10.3      |
| 40°-50°   | 21.8   | 3.1       |
| 50°-60°   | 7.4    | 1.1       |
| 60°-70°   | 5.0    | 0.7       |
| 70°-80°   | 2.9    | 0.4       |
| 80°-90°   | 1.0    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 592.5  | 84.3      |
| 0°-40°    | 665.0  | 94.6      |
| 0°-60°    | 694.1  | 98.7      |
| 0°-90°    | 703.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 703.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1617 |      |
| 5°  | 1548 | 141  |
| 15° | 1002 | 273  |
| 25° | 380  | 179  |
| 35° | 110  | 72   |
| 45° | 26   | 22   |
| 55° | 8    | 7    |
| 65° | 5    | 5    |
| 75° | 3    | 3    |
| 85° | 1    | 1    |
| 90° | 0    |      |

TEST NUMBER: P1286816

CATALOG NUMBER: P3AS09R359030D2WDE010 E3DL1WMH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1616.9 |
| 1°    | 1614.3 |
| 2°    | 1606.9 |
| 3°    | 1592.2 |
| 4°    | 1574.8 |
| 5°    | 1548.1 |
| 6°    | 1514.6 |
| 7°    | 1477.2 |
| 8°    | 1435.0 |
| 9°    | 1386.9 |
| 10°   | 1333.4 |
| 11°   | 1273.9 |
| 12°   | 1211.7 |
| 13°   | 1142.2 |
| 14°   | 1076.0 |
| 15°   | 1001.7 |
| 17.5° | 821.8  |
| 20°   | 652.0  |
| 22.5° | 501.5  |
| 25°   | 380.5  |
| 27.5° | 283.5  |
| 30°   | 208.6  |
| 32.5° | 153.1  |
| 35°   | 110.3  |
| 37.5° | 78.2   |
| 40°   | 54.8   |
| 42.5° | 38.1   |
| 45°   | 26.1   |
| 47.5° | 17.4   |
| 50°   | 11.4   |
| 52.5° | 8.7    |
| 55°   | 8.0    |
| 57.5° | 7.4    |
| 60°   | 6.7    |
| 62.5° | 6.0    |
| 65°   | 4.7    |
| 67.5° | 4.0    |
| 70°   | 4.0    |
| 72.5° | 3.3    |
| 75°   | 2.7    |
| 77.5° | 2.0    |
| 80°   | 2.0    |
| 82.5° | 1.3    |
| 85°   | 0.7    |
| 87.5° | 0.7    |



TEST NUMBER: P1286816

CATALOG NUMBER: P3AS09R359030D2WDE010 E3DL1WMH

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)