

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286830

Luminaire Tested: P3AS09R359030D2WDE010 E3PHLD1MW

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1286830  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-20)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R359030D2WDE010 E3PHLD1MW  
Description: 3in Adjustable Dim to Warm LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,  
E3PHLD1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 519.0 lumens  
Efficiency: N/A  
Efficacy: 35.3 lumens/watt  
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.92  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1286830  
CATALOG NUMBER: P3AS09R359030D2WDE010 E3PHLD1MW

### Luminous Intensity Polar Plot

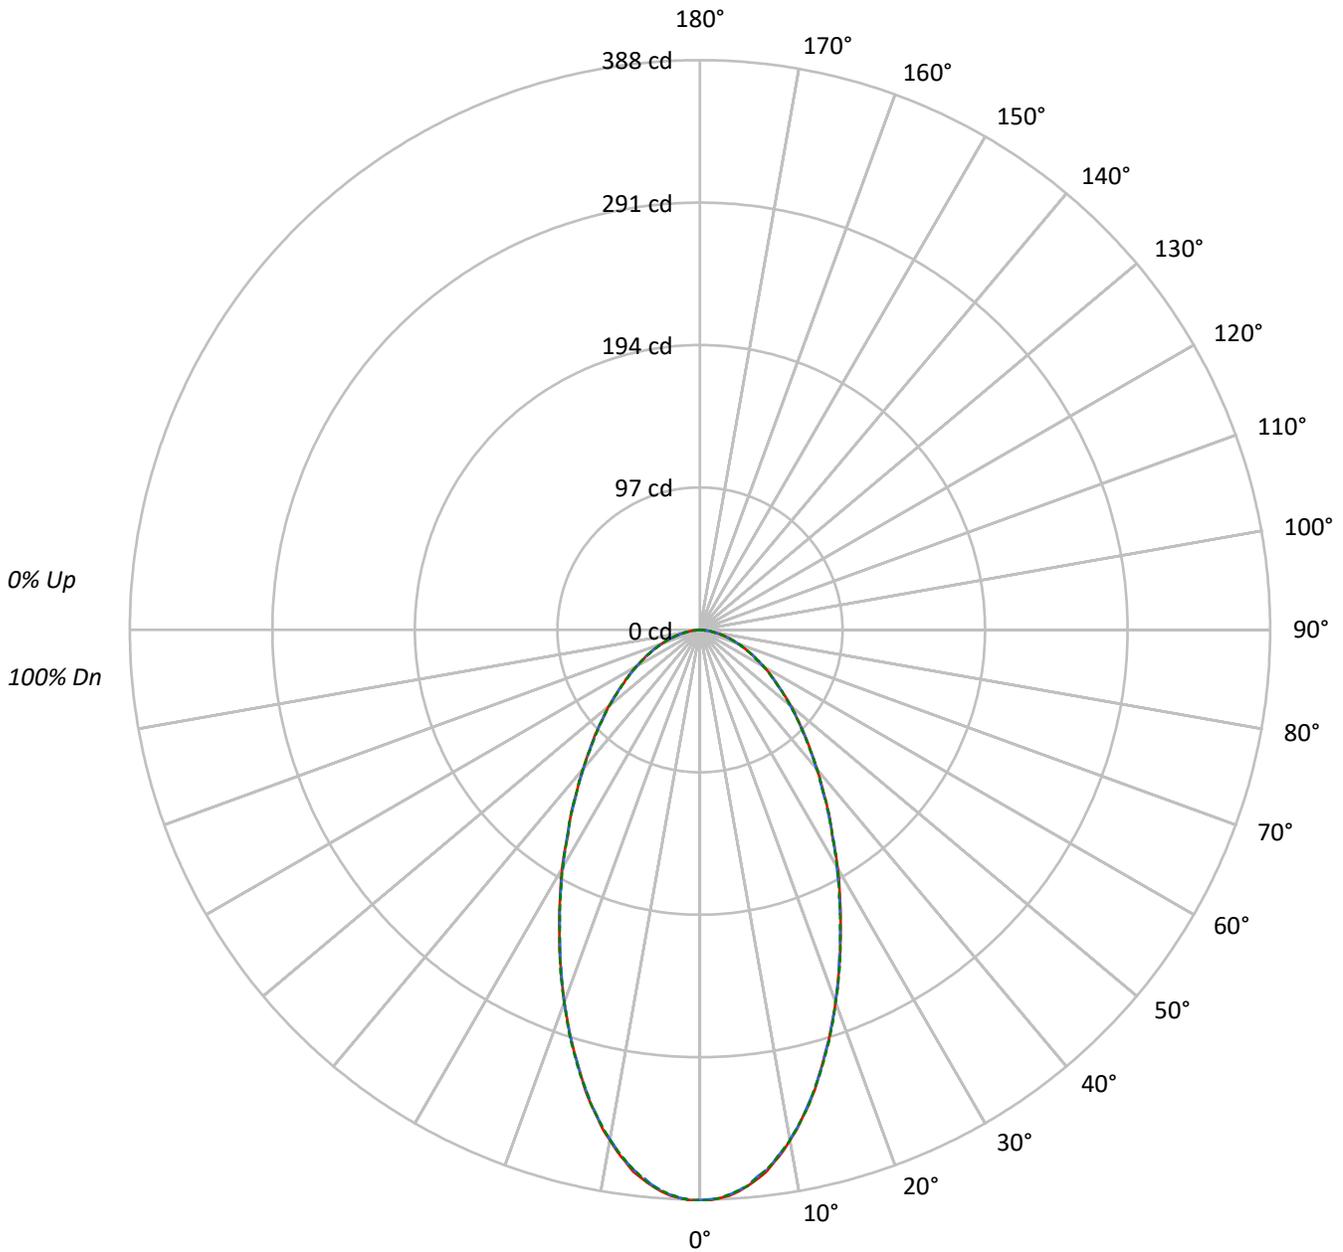

— 0°-180°    - - 45°-225°    - - - 90°-270°



TEST NUMBER: P1286830  
 CATALOG NUMBER: P3AS09R359030D2WDE010 E3PHLD1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	100
1	111	107	103	100	108	105	101	99	100	98	95	97	95	93	93	91	90	93	91	90	88
2	103	96	90	85	100	94	89	84	90	86	82	87	84	81	84	81	79	84	81	79	77
3	95	86	79	74	93	85	78	73	82	76	72	79	75	71	77	73	70	77	73	70	68
4	88	78	71	65	86	77	70	65	75	68	64	72	67	63	70	66	62	70	66	62	60
5	82	71	64	58	80	70	63	58	68	62	57	66	61	56	65	60	56	65	60	56	54
6	77	65	58	52	75	65	57	52	63	56	51	61	55	51	60	55	51	60	55	51	49
7	72	60	53	47	71	60	52	47	58	52	47	57	51	46	55	50	46	55	50	46	44
8	68	56	48	43	66	55	48	43	54	47	43	53	47	43	52	46	42	52	46	42	41
9	64	52	45	40	63	51	44	40	50	44	39	49	44	39	48	43	39	48	43	39	38
10	60	49	42	37	59	48	41	37	47	41	37	46	41	36	45	40	36	45	40	36	35

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	85191	85191	85191
5°	83601	83447	83601
10°	78600	78444	78600
15°	71170	71170	71306
20°	62982	62982	62982
25°	54777	54608	54608
30°	47476	47146	47324
35°	40877	40689	40877
40°	35466	35266	35466
45°	31166	30949	30949
50°	27632	27428	27428
55°	24315	24315	24315
60°	22016	21753	22016
65°	19821	19821	19821
70°	17631	17631	17631
75°	15928	15335	15928
80°	13512	13512	13512
85°	8303	8303	8303

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 31166 cd/sqm



TEST NUMBER: P1286830

CATALOG NUMBER: P3AS09R359030D2WDE010 E3PHLD1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	35.3	6.8
10°-20°	87.4	16.8
20°-30°	103.9	20.0
30°-40°	95.5	18.4
40°-50°	77.5	14.9
50°-60°	57.4	11.1
60°-70°	37.9	7.3
70°-80°	19.7	3.8
80°-90°	4.4	0.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	226.7	43.7
0°-40°	322.1	62.1
0°-60°	457.0	88.1
0°-90°	519.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	519.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	388	388	388	388	388	
5°	380	379	379	379	380	35
15°	314	314	314	314	314	87
25°	226	226	226	226	226	104
35°	153	152	152	153	153	96
45°	100	100	100	100	100	78
55°	64	64	64	64	64	58
65°	38	38	38	38	38	38
75°	19	19	18	19	19	20
85°	3	3	3	3	3	4
90°	0	0	0	0	0	



TEST NUMBER: P1286830

CATALOG NUMBER: P3AS09R359030D2WDE010 E3PHLD1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	388.5	388.5	388.5	388.5	388.5
1°	388.5	387.8	387.8	387.8	388.5
2°	387.2	387.2	387.2	387.2	387.2
3°	385.8	385.1	385.1	385.1	385.1
4°	383.1	382.5	382.5	382.5	382.5
5°	379.8	379.1	379.1	379.1	379.8
6°	375.8	375.1	374.4	374.4	375.1
7°	371.7	370.4	370.4	370.4	370.4
8°	365.7	365.0	365.0	365.0	365.0
9°	359.7	358.3	359.0	359.0	359.0
10°	353.0	352.3	352.3	352.3	353.0
11°	346.3	345.6	345.6	345.0	345.6
12°	338.3	338.3	338.3	338.3	338.3
13°	330.9	330.2	330.2	330.2	330.9
14°	322.8	322.2	322.2	322.2	322.2
15°	313.5	313.5	313.5	313.5	314.1
17.5°	292.0	291.4	292.0	292.0	292.7
20°	269.9	269.3	269.9	269.9	269.9
22.5°	247.8	247.8	247.2	247.8	248.5
25°	226.4	225.7	225.7	226.4	225.7
27.5°	206.3	205.6	205.6	205.6	205.6
30°	187.5	186.2	186.2	186.9	186.9
32.5°	168.1	168.1	168.8	168.1	168.1
35°	152.7	152.0	152.0	152.7	152.7
37.5°	137.3	136.6	136.6	137.3	137.3
40°	123.9	123.9	123.2	123.9	123.9
42.5°	111.2	111.2	111.2	111.2	111.2
45°	100.5	99.8	99.8	99.8	99.8
47.5°	89.8	89.8	89.8	89.1	89.8
50°	81.0	80.4	80.4	80.4	80.4
52.5°	71.7	71.7	71.7	71.7	71.7
55°	63.6	63.6	63.6	63.6	63.6
57.5°	56.9	56.3	56.3	56.3	56.3
60°	50.2	50.2	49.6	50.2	50.2
62.5°	43.5	43.5	43.5	43.5	43.5
65°	38.2	38.2	38.2	38.2	38.2
67.5°	32.8	32.8	32.8	32.8	32.8
70°	27.5	27.5	27.5	27.5	27.5
72.5°	23.4	22.8	22.8	22.8	22.8
75°	18.8	18.8	18.1	18.8	18.8
77.5°	14.1	14.1	14.1	14.1	14.1
80°	10.7	10.7	10.7	10.0	10.7
82.5°	6.7	6.7	6.7	6.7	6.7
85°	3.3	3.3	3.3	3.3	3.3
87.5°	0.7	0.7	0.7	1.3	1.3



TEST NUMBER: P1286830  
CATALOG NUMBER: P3AS09R359030D2WDE010 E3PHLD1MW

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)