

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286841

Luminaire Tested: P3AS09R409030D2WDE010 E3D1WH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286841
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R409030D2WDE010 E3D1WH
Description: 3in Adjustable Dim to Warm LED luminaire with, R40 optic, 3000K CCT AND, 90CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 937.0 lumens
Efficiency: N/A
Efficacy: 63.7 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286841

CATALOG NUMBER: P3AS09R409030D2WDE010 E3D1WH

Luminous Intensity Polar Plot

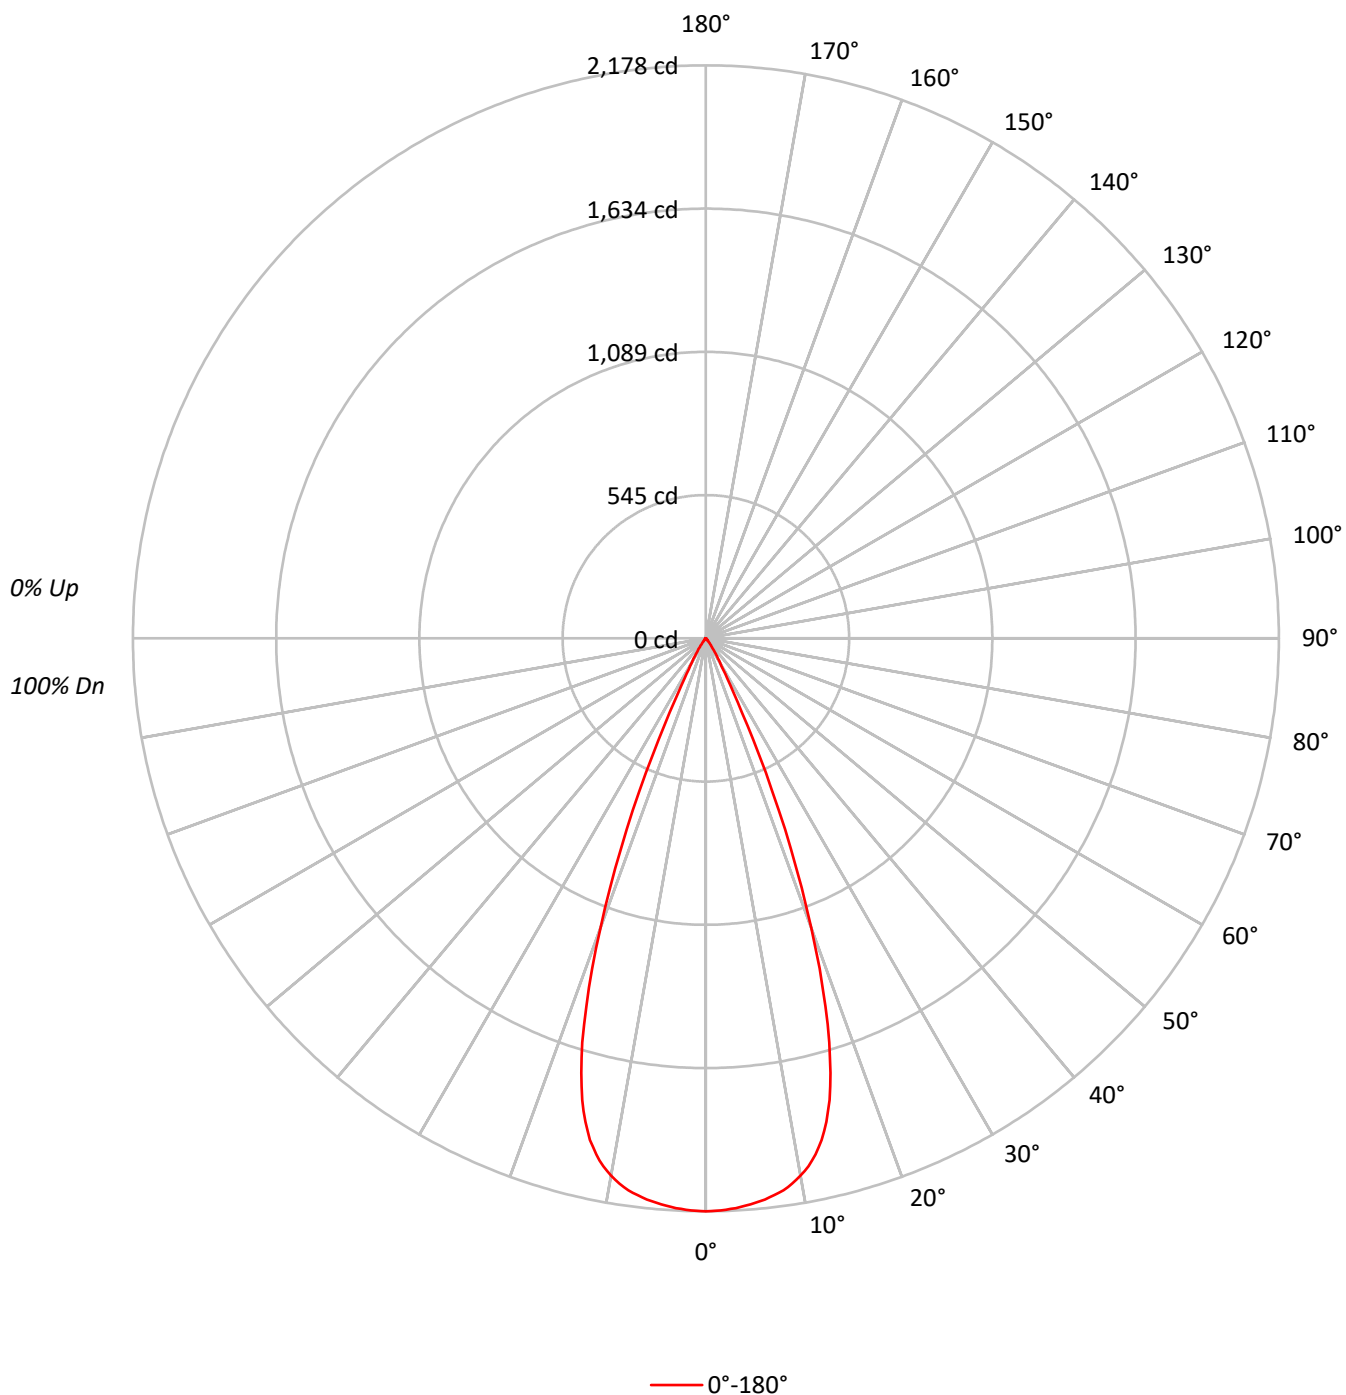

TEST NUMBER: P1286841

CATALOG NUMBER: P3AS09R409030D2WDE010 E3D1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	112	110	109	112	110	109	107	106	105	104		103	102	101		99
2	111	107	104	101	109	105	102	100	102	100	98		99	97	96		96
3	107	102	98	95	105	100	97	94	98	95	93		96	93	91		93
4	103	97	93	90	101	96	92	89	94	91	88		92	89	87		90
5	99	93	89	85	98	92	88	85	91	87	84		89	86	84		88
6	96	89	85	81	95	89	84	81	87	83	81		86	83	80		85
7	93	86	81	78	92	85	81	78	84	80	77		83	80	77		82
8	90	83	78	75	89	82	78	75	81	77	75		80	77	74		79
9	87	80	75	72	86	79	75	72	78	75	72		78	74	72		77
10	84	77	72	70	83	77	72	69	76	72	69		75	72	69		75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	477615
5°	474157
10°	461759
15°	412465
20°	273490
25°	102466
30°	27397
35°	10708
40°	3836
45°	1830
50°	546
55°	268
60°	132
65°	156
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1830 cd/sqm

TEST NUMBER: P1286841

CATALOG NUMBER: P3AS09R409030D2WDE010 E3D1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	203.3	21.7
10°-20°	481.4	51.4
20°-30°	218.3	23.3
30°-40°	28.3	3.0
40°-50°	4.9	0.5
50°-60°	0.6	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	903.0	96.4
0°-40°	931.3	99.4
0°-60°	936.8	100.0
0°-90°	937.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	937.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2178	
5°	2154	203
15°	1817	481
25°	424	218
35°	40	28
45°	6	5
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1286841

CATALOG NUMBER: P3AS09R409030D2WDE010 E3D1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2178.1
1°	2176.8
2°	2173.5
3°	2168.6
4°	2162.3
5°	2154.1
6°	2144.6
7°	2132.8
8°	2118.4
9°	2098.7
10°	2073.8
11°	2044.6
12°	2005.5
13°	1957.3
14°	1894.3
15°	1816.9
16°	1718.2
17°	1605.7
18°	1470.5
19°	1327.8
20°	1172.0
21°	1016.2
22°	862.7
23°	709.8
24°	559.6
25°	423.5
26°	313.6
27°	229.6
28°	172.5
29°	134.2
30°	108.2
31°	89.6
32°	74.8
32.5°	68.2
33°	61.7
34°	50.2
35°	40.0
36°	31.5
37°	24.9
37.5°	22.3
38°	19.7
39°	16.4
40°	13.4
42.5°	8.9
45°	5.9

TEST NUMBER: P1286841

CATALOG NUMBER: P3AS09R409030D2WDE010 E3D1WH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	3.6
50°	1.6
52.5°	0.7
55°	0.7
57.5°	0.3
60°	0.3
62.5°	0.3
65°	0.3
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)