

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286874

Luminaire Tested: P3AS09R459030D2WDE010 E3DLD1GPH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1286874  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R459030D2WDE010 E3DLD1GPH  
Description: 3in Adjustable Dim to Warm LED luminaire with, R45 optic, 3000K CCT AND, 90CRI ,  
E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 285.1 lumens  
Efficiency: N/A  
Efficacy: 19.4 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1286874  
CATALOG NUMBER: P3AS09R459030D2WDE010 E3DLD1GPH

### Luminous Intensity Polar Plot

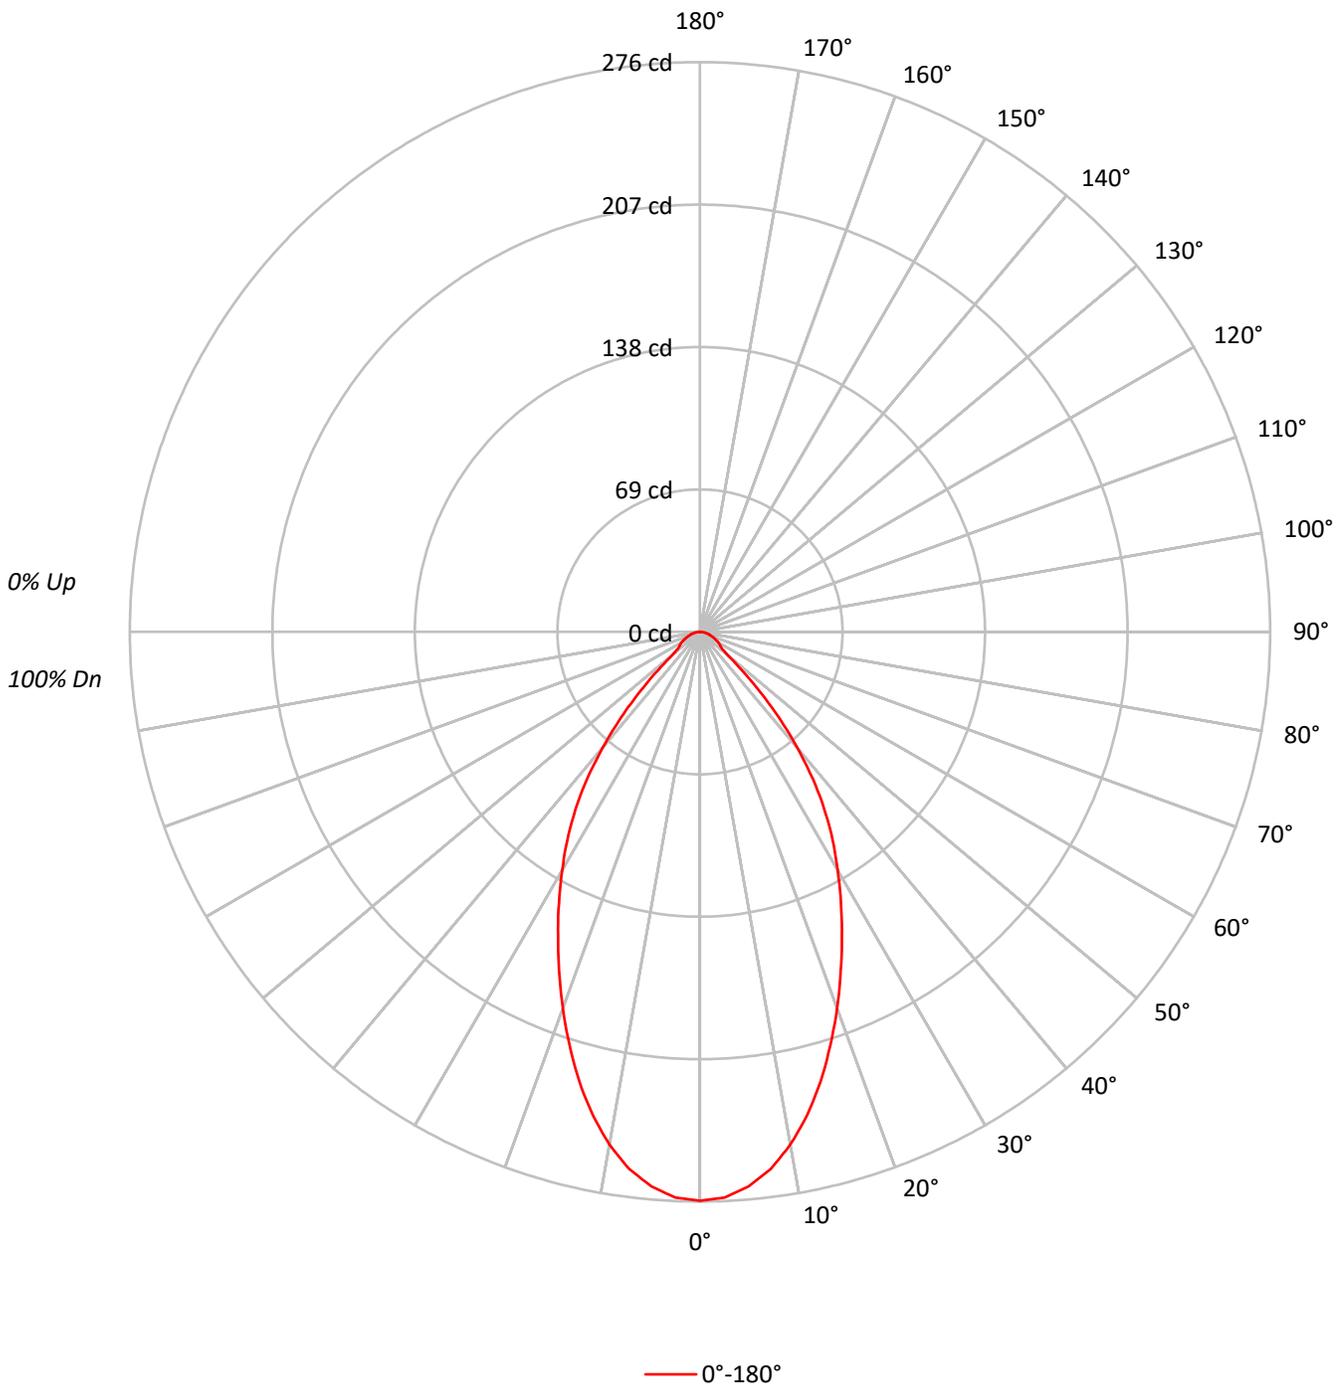



TEST NUMBER: P1286874

CATALOG NUMBER: P3AS09R459030D2WDE010 E3DLD1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91				91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83				83
3	99	92	86	82	97	90	85	81	88	83	80	85	81	78	83	80	77	75				75
4	94	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69				69
5	88	79	72	67	86	78	71	67	76	70	66	74	69	65	72	68	65	63				63
6	83	73	66	61	81	72	66	61	71	65	61	69	64	60	68	63	60	58				58
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54				54
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	52	50				50
9	70	60	53	49	69	59	53	49	58	52	48	57	52	48	56	52	48	47				47
10	67	56	50	45	66	56	49	45	55	49	45	54	49	45	53	48	45	44				44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	60434
5°	59366
10°	56156
15°	51215
20°	45294
25°	39341
30°	33752
35°	28134
40°	20954
45°	12839
50°	5936
55°	4664
60°	4473
65°	4099
70°	3783
75°	3643
80°	3283
85°	2516

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 12839 cd/sqm



TEST NUMBER: P1286874

CATALOG NUMBER: P3AS09R459030D2WDE010 E3DLD1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	25.2	8.8
10°-20°	62.8	22.0
20°-30°	74.6	26.2
30°-40°	64.9	22.8
40°-50°	32.5	11.4
50°-60°	11.3	4.0
60°-70°	7.9	2.8
70°-80°	4.4	1.5
80°-90°	1.4	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	162.7	57.1
0°-40°	227.5	79.8
0°-60°	271.3	95.2
0°-90°	285.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	285.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	276	
5°	270	25
15°	226	63
25°	163	75
35°	105	65
45°	41	33
55°	12	11
65°	8	8
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1286874

CATALOG NUMBER: P3AS09R459030D2WDE010 E3DLD1GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	275.6
2.5°	274.3
5°	269.7
7.5°	262.4
10°	252.2
12.5°	239.8
15°	225.6
17.5°	209.9
20°	194.1
22.5°	178.0
25°	162.6
27.5°	147.8
30°	133.3
32.5°	119.6
35°	105.1
37.5°	89.7
40°	73.2
42.5°	57.1
45°	41.4
47.5°	27.3
50°	17.4
52.5°	13.5
55°	12.2
57.5°	11.2
60°	10.2
62.5°	9.2
65°	7.9
67.5°	6.9
70°	5.9
72.5°	4.9
75°	4.3
77.5°	3.3
80°	2.6
82.5°	2.0
85°	1.0
87.5°	0.7
90°	0.0

(END OF REPORT)