

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286887

Luminaire Tested: P3AS09R509030D2WDE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286887
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-32)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R509030D2WDE010 E3CB1MMS
Description: 3in Adjustable Dim to Warm LED luminaire with, R50 optic, 3000K CCT AND, 90CRI ,
E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 916.0 lumens
Efficiency: N/A
Efficacy: 62.3 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.76
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286887

CATALOG NUMBER: P3AS09R509030D2WDE010 E3CB1MMS

Luminous Intensity Polar Plot

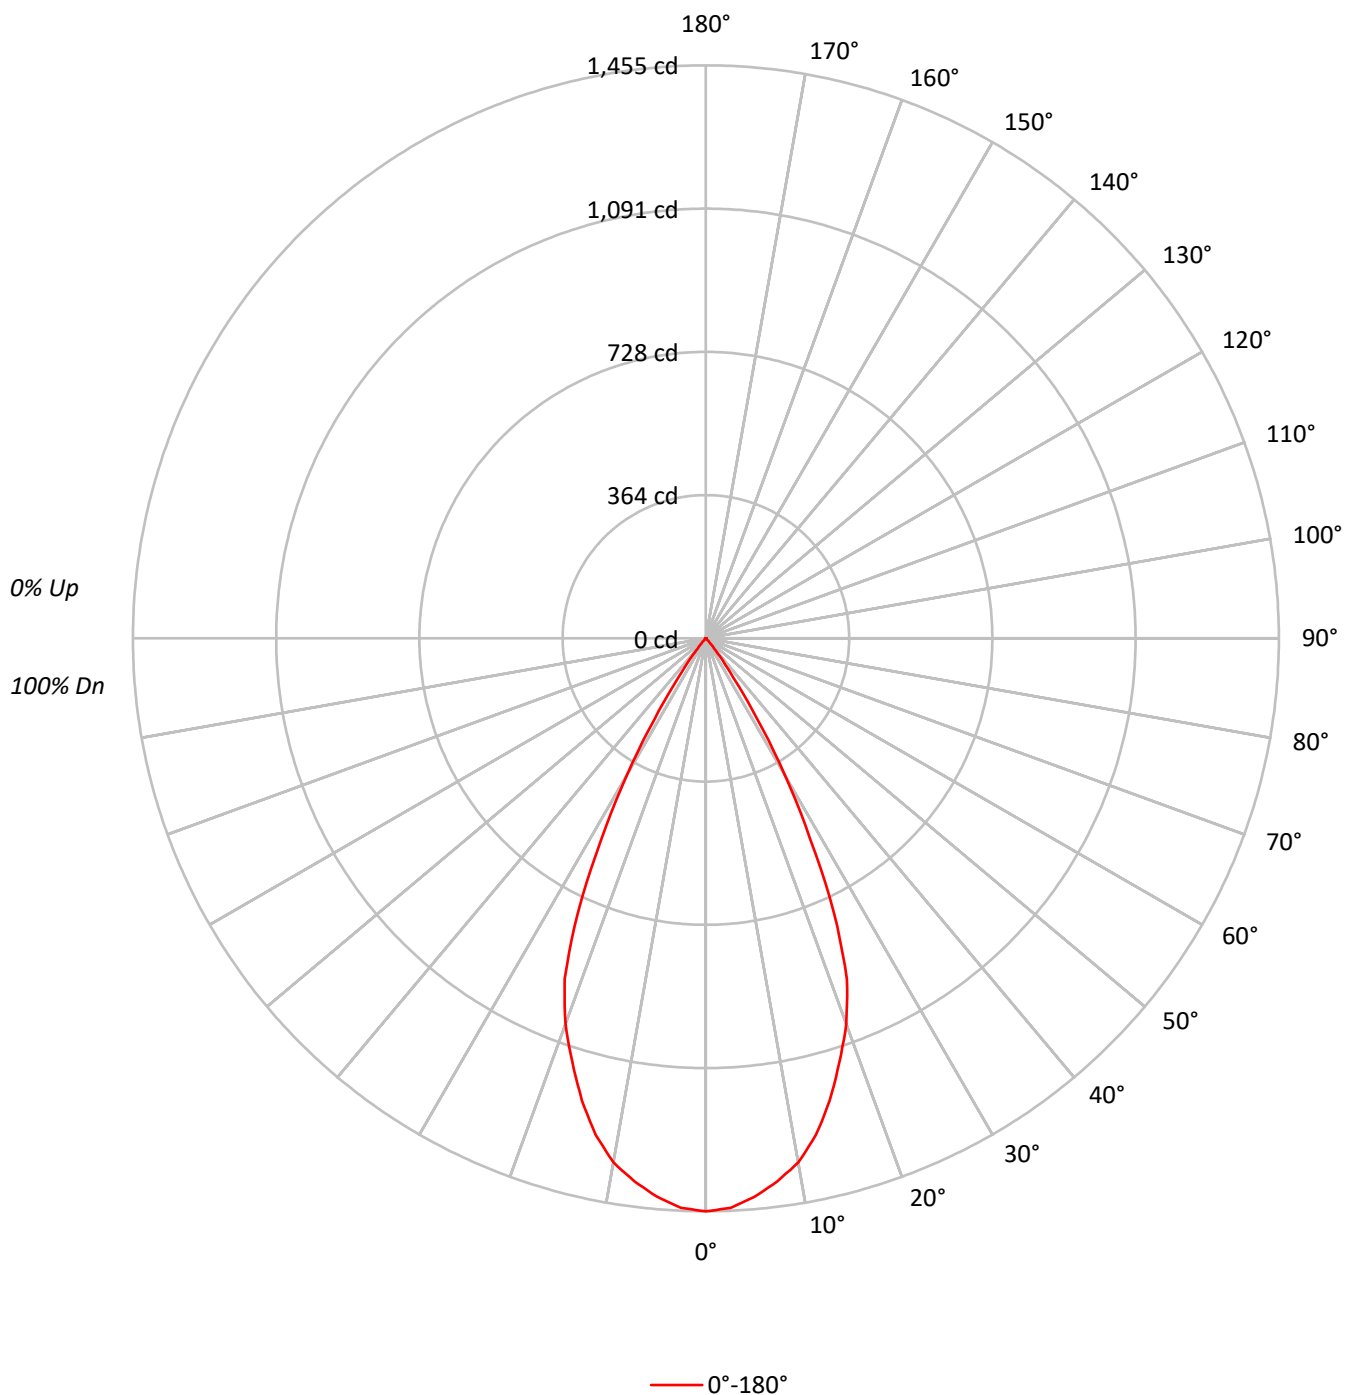

TEST NUMBER: P1286887

CATALOG NUMBER: P3AS09R509030D2WDE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	109	107	112	109	107	106	105	104	102		102	101	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	105	99	95	91	103	98	94	90	95	92	89		93	90	88		91
4	100	94	89	85	99	92	88	85	90	87	84		88	85	83		87
5	96	89	84	80	94	88	83	79	86	82	79		84	81	78		83
6	92	84	79	75	91	83	79	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76
8	85	76	71	67	83	76	71	67	75	70	67		74	70	67		73
9	81	73	68	64	80	72	67	64	71	67	64		71	66	63		70
10	78	69	64	61	77	69	64	61	68	64	61		68	63	61		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	319010
5°	313316
10°	300841
15°	275847
20°	243248
25°	186446
30°	101383
35°	32605
40°	7672
45°	1023
50°	921
55°	1032
60°	877
65°	1038
70°	833
75°	1101
80°	884
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 85°
Luminance: 1761 cd/sqm

TEST NUMBER: P1286887

CATALOG NUMBER: P3AS09R509030D2WDE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.6	14.6
10°-20°	337.8	36.9
20°-30°	338.3	36.9
30°-40°	95.1	10.4
40°-50°	5.7	0.6
50°-60°	2.2	0.2
60°-70°	1.7	0.2
70°-80°	1.1	0.1
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	809.6	88.4
0°-40°	904.7	98.8
0°-60°	912.7	99.6
0°-90°	916.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	916.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1455	
5°	1423	134
15°	1215	338
25°	771	338
35°	122	95
45°	3	6
55°	3	2
65°	2	2
75°	1	1
85°	1	0
90°	0	

TEST NUMBER: P1286887

CATALOG NUMBER: P3AS09R509030D2WDE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	1454.8
2.5°	1447.5
5°	1423.4
7.5°	1390.6
10°	1351.1
12.5°	1291.5
15°	1215.1
17.5°	1127.4
20°	1042.4
22.5°	936.6
25°	770.6
27.5°	573.8
30°	400.4
32.5°	241.7
35°	121.8
37.5°	57.6
40°	26.8
42.5°	10.0
45°	3.3
47.5°	2.7
50°	2.7
52.5°	2.7
55°	2.7
57.5°	2.0
60°	2.0
62.5°	2.0
65°	2.0
67.5°	1.3
70°	1.3
72.5°	1.3
75°	1.3
77.5°	0.7
80°	0.7
82.5°	0.7
85°	0.7
87.5°	0.0
90°	0.0

(END OF REPORT)