

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286916

Luminaire Tested: P3AS09R559030D2WDE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286916
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-36)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R559030D2WDE010 E3CB1MMS
Description: 3in Adjustable Dim to Warm LED luminaire with, R55 optic, 3000K CCT AND, 90CRI ,
E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 890.0 lumens
Efficiency: N/A
Efficacy: 60.5 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286916

CATALOG NUMBER: P3AS09R559030D2WDE010 E3CB1MMS

Luminous Intensity Polar Plot

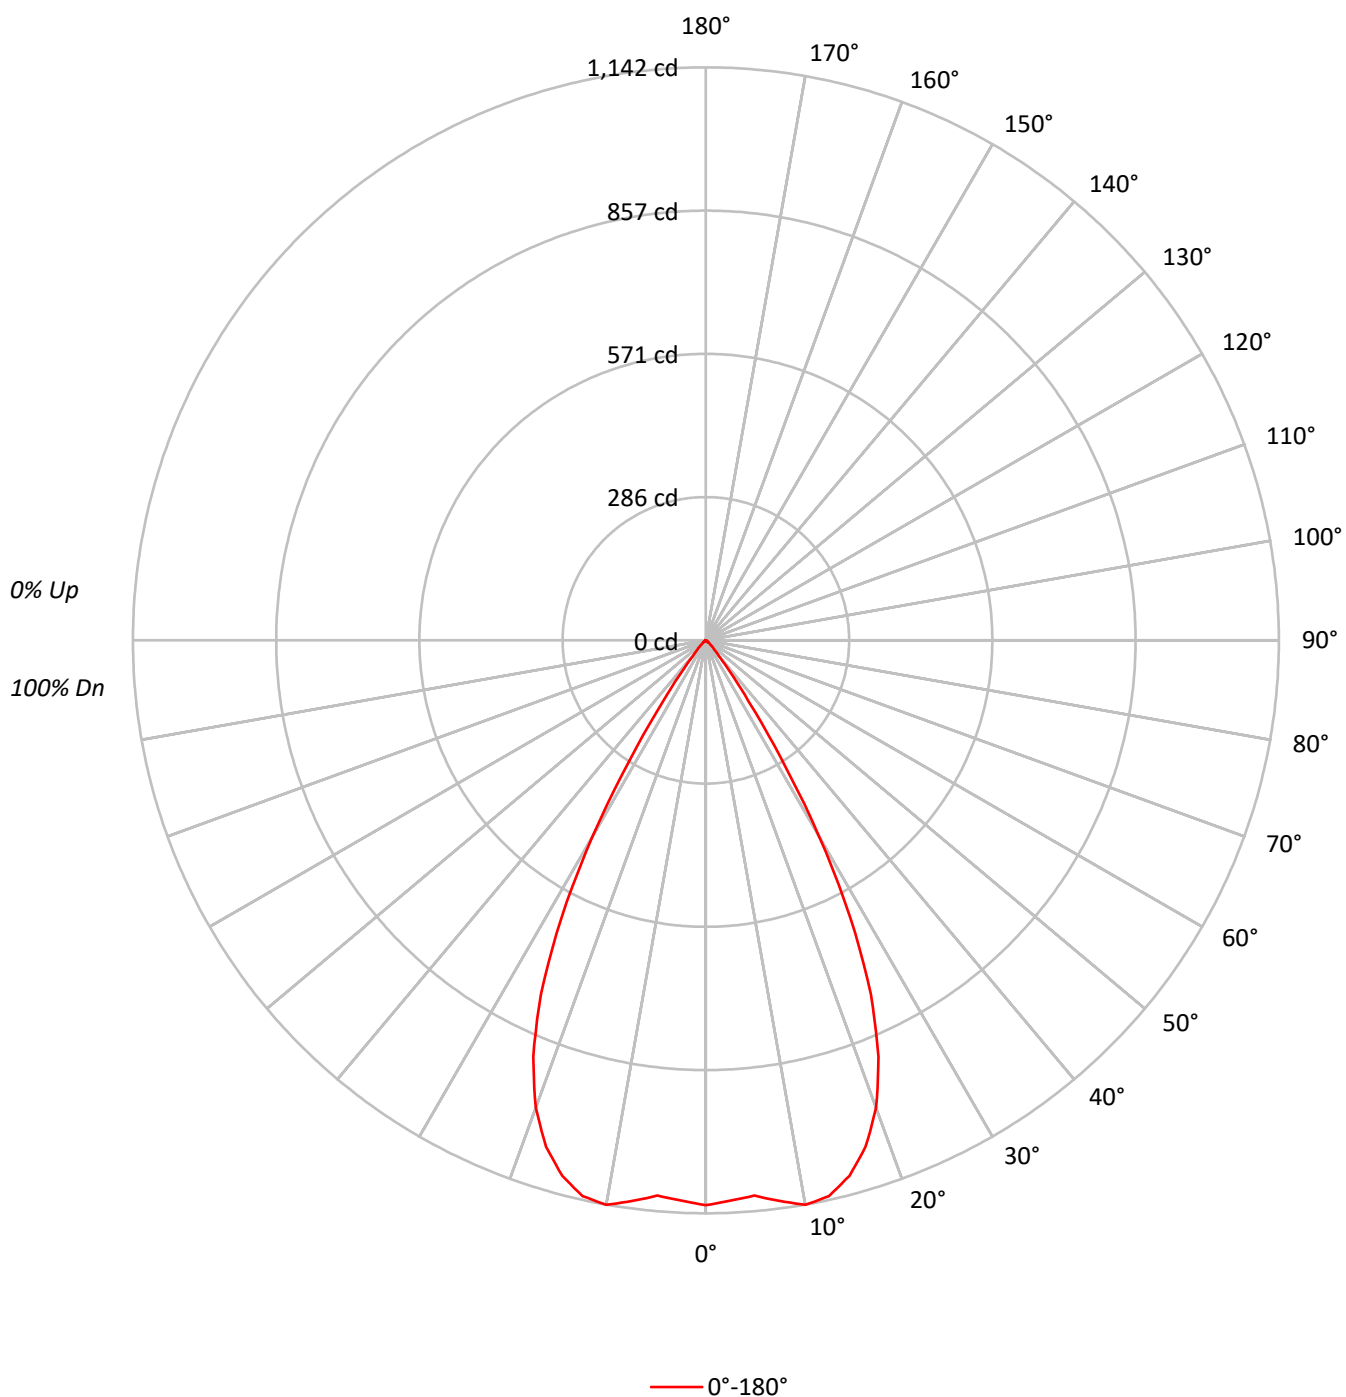

TEST NUMBER: P1286916

CATALOG NUMBER: P3AS09R559030D2WDE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	111	109	107	112	109	107	105	105	104	102		101	100	99		98	97	96	94
2	109	104	101	98	107	103	99	96	100	97	94		97	94	92		94	92	90	89
3	104	98	94	90	102	97	93	89	94	91	88		92	89	86		90	87	85	84
4	99	92	87	84	98	91	87	83	89	85	82		87	84	81		86	83	80	79
5	95	87	82	78	93	86	81	78	85	80	77		83	79	76		82	78	76	74
6	91	83	77	73	89	82	77	73	80	76	72		79	75	72		78	74	72	70
7	87	78	73	69	85	78	72	69	76	72	68		75	71	68		74	70	68	66
8	83	74	69	65	82	74	69	65	73	68	65		72	67	64		71	67	64	63
9	79	71	65	61	78	70	65	61	69	64	61		68	64	61		68	64	61	60
10	76	67	62	58	75	67	62	58	66	61	58		65	61	58		65	61	58	57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	246844
5°	244551
10°	254371
15°	250853
20°	231323
25°	188212
30°	114321
35°	39565
40°	11307
45°	5396
50°	2286
55°	1032
60°	1184
65°	1038
70°	833
75°	1101
80°	884
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5396 cd/sqm

TEST NUMBER: P1286916

CATALOG NUMBER: P3AS09R559030D2WDE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.4	12.1
10°-20°	307.1	34.5
20°-30°	342.4	38.5
30°-40°	112.0	12.6
40°-50°	14.8	1.7
50°-60°	3.1	0.4
60°-70°	1.8	0.2
70°-80°	1.1	0.1
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	756.9	85.0
0°-40°	868.9	97.6
0°-60°	886.8	99.6
0°-90°	890.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	890.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1126	
5°	1111	107
15°	1105	307
25°	778	342
35°	148	112
45°	17	15
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1286916

CATALOG NUMBER: P3AS09R559030D2WDE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	1125.7
2.5°	1117.7
5°	1111.0
7.5°	1127.0
10°	1142.4
12.5°	1134.4
15°	1105.0
17.5°	1058.2
20°	991.3
22.5°	899.0
25°	777.9
27.5°	624.1
30°	451.5
32.5°	276.9
35°	147.8
37.5°	74.9
40°	39.5
42.5°	25.4
45°	17.4
47.5°	12.0
50°	6.7
52.5°	4.0
55°	2.7
57.5°	2.7
60°	2.7
62.5°	2.0
65°	2.0
67.5°	1.3
70°	1.3
72.5°	1.3
75°	1.3
77.5°	0.7
80°	0.7
82.5°	0.7
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)