

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286930

Luminaire Tested: P3AS09R559030D2WDE010 E3DL1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286930
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R559030D2WDE010 E3DL1WH
Description: 3in Adjustable Dim to Warm LED luminaire with, R55 optic, 3000K CCT AND, 90CRI , E3DL1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 487.0 lumens
Efficiency: N/A
Efficacy: 33.1 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286930

CATALOG NUMBER: P3AS09R559030D2WDE010 E3DL1WH

Luminous Intensity Polar Plot

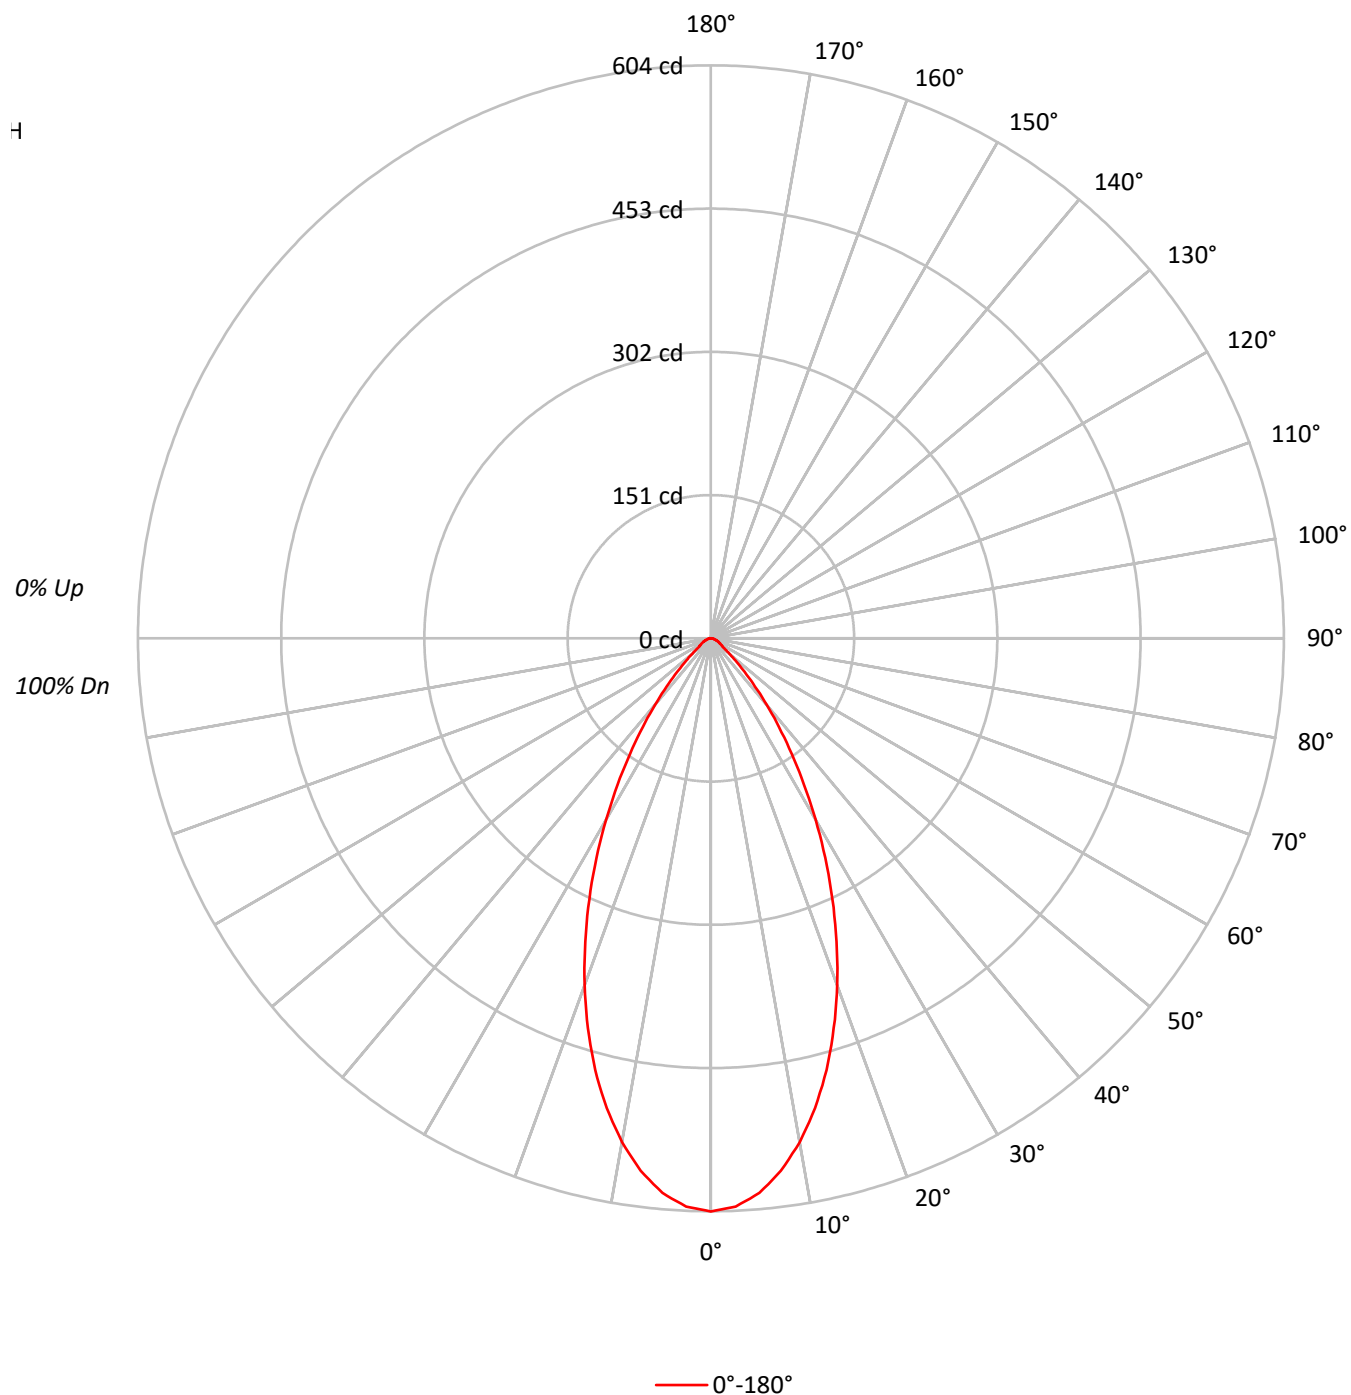

TEST NUMBER: P1286930

CATALOG NUMBER: P3AS09R559030D2WDE010 E3DL1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	113	110	107	105		110	108	105	103		104	102	100		100	98	97		97	95	94
2	107	102	97	94		105	100	96	93		97	93	91		94	91	89		91	89	87
3	101	94	89	85		99	93	88	84		90	86	83		88	84	81		85	83	80
4	96	88	82	77		94	87	81	77		84	80	76		82	78	75		80	77	74
5	91	82	76	71		89	81	75	71		79	74	70		77	73	70		76	72	69
6	86	77	70	66		84	76	70	66		74	69	65		73	68	65		72	68	64
7	82	72	66	61		80	71	65	61		70	65	61		69	64	60		68	63	60
8	78	68	62	57		76	67	61	57		66	61	57		65	60	57		64	60	56
9	74	64	58	54		73	63	58	54		62	57	53		62	57	53		61	56	53
10	70	60	55	51		69	60	54	50		59	54	50		58	54	50		58	53	50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	132489
5°	129165
10°	120082
15°	106925
20°	90868
25°	73335
30°	55907
35°	39752
40°	26249
45°	15568
50°	9143
55°	5620
60°	5000
65°	4514
70°	3847
75°	3389
80°	3410
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15568 cd/sqm

TEST NUMBER: P1286930

CATALOG NUMBER: P3AS09R559030D2WDE010 E3DL1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.5	11.2
10°-20°	130.6	26.8
20°-30°	138.3	28.4
30°-40°	93.5	19.2
40°-50°	41.0	8.4
50°-60°	14.7	3.0
60°-70°	8.6	1.8
70°-80°	4.5	0.9
80°-90°	1.5	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	323.4	66.4
0°-40°	416.8	85.6
0°-60°	472.5	97.0
0°-90°	487.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	487.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	604	
5°	587	54
15°	471	131
25°	303	138
35°	148	93
45°	50	41
55°	15	15
65°	9	9
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1286930

CATALOG NUMBER: P3AS09R559030D2WDE010 E3DL1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	604.2
2.5°	599.5
5°	586.8
7.5°	566.0
10°	539.3
12.5°	507.1
15°	471.0
17.5°	430.9
20°	389.4
22.5°	345.9
25°	303.1
27.5°	260.9
30°	220.8
32.5°	182.7
35°	148.5
37.5°	117.8
40°	91.7
42.5°	68.9
45°	50.2
47.5°	36.8
50°	26.8
52.5°	18.7
55°	14.7
57.5°	13.4
60°	11.4
62.5°	10.0
65°	8.7
67.5°	7.4
70°	6.0
72.5°	5.4
75°	4.0
77.5°	3.3
80°	2.7
82.5°	2.0
85°	1.3
87.5°	0.7
90°	0.0

(END OF REPORT)