

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286938

Luminaire Tested: P3AS09R559030D2WDE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286938
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-33)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R559030D2WDE010 E3DLP1GPH
Description: 3in Adjustable Dim to Warm LED luminaire with, R55 optic, 3000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 239.0 lumens
Efficiency: N/A
Efficacy: 16.3 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.8
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286938
CATALOG NUMBER: P3AS09R559030D2WDE010 E3DLP1GPH

Luminous Intensity Polar Plot

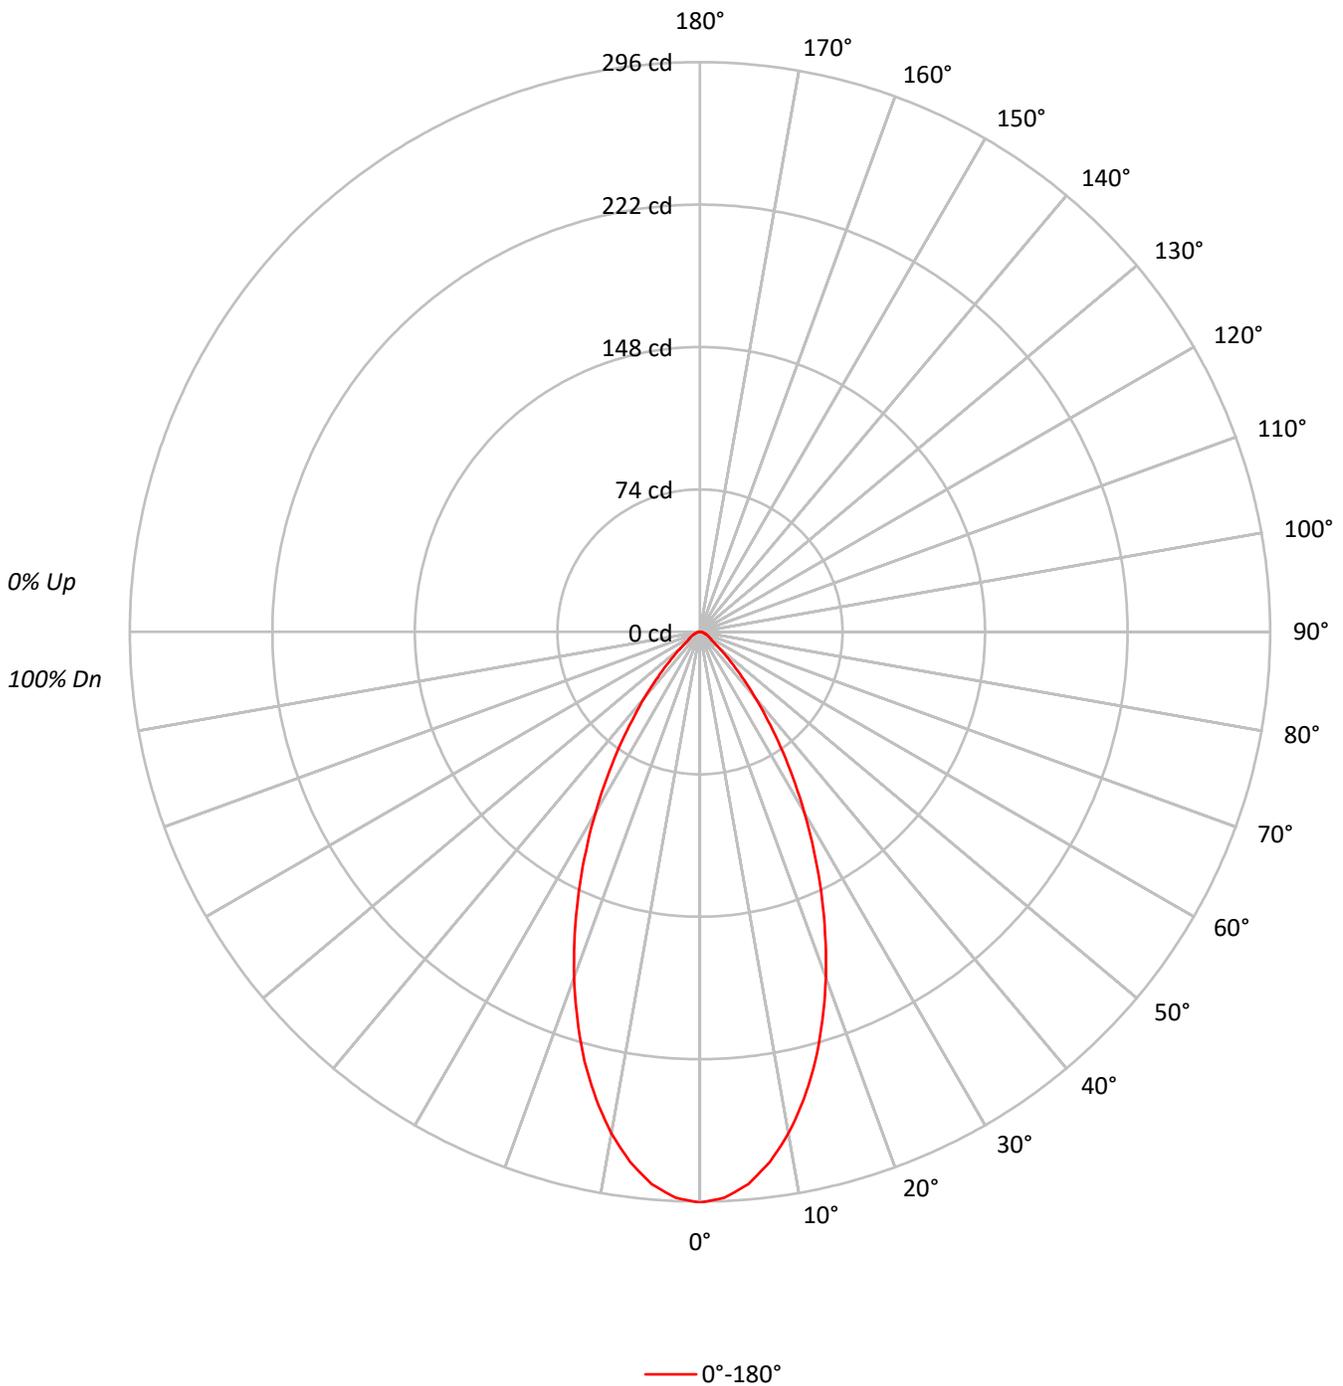



TEST NUMBER: P1286938

CATALOG NUMBER: P3AS09R559030D2WDE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	97	95	94	92				92
2	107	102	97	94	105	100	96	93	97	93	91	94	91	89	91	89	87	85				85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	81	85	83	80	79				79
4	96	88	82	77	94	87	81	77	84	80	76	82	78	75	80	77	74	73				73
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	67				67
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	68	64	63				63
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	68	63	60	59				59
8	78	68	62	57	76	67	61	57	66	61	57	65	60	57	64	60	56	55				55
9	74	64	58	54	73	63	58	54	62	57	53	62	57	53	61	56	53	52				52
10	70	60	55	51	69	60	54	50	59	54	50	58	54	50	58	53	50	49				49

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	65017
5°	63394
10°	58917
15°	52486
20°	44594
25°	35978
30°	27447
35°	19515
40°	12881
45°	7629
50°	4469
55°	2753
60°	2456
65°	2231
70°	1923
75°	1694
80°	1642
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7629 cd/sqm



TEST NUMBER: P1286938

CATALOG NUMBER: P3AS09R559030D2WDE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	26.7	11.2
10°-20°	64.1	26.8
20°-30°	67.9	28.4
30°-40°	45.9	19.2
40°-50°	20.1	8.4
50°-60°	7.2	3.0
60°-70°	4.2	1.8
70°-80°	2.2	0.9
80°-90°	0.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	158.7	66.4
0°-40°	204.6	85.6
0°-60°	231.9	97.0
0°-90°	239.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	239.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	296	
5°	288	27
15°	231	64
25°	149	68
35°	73	46
45°	25	20
55°	7	7
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1286938
CATALOG NUMBER: P3AS09R559030D2WDE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	296.5
2.5°	294.2
5°	288.0
7.5°	277.8
10°	264.6
12.5°	248.9
15°	231.2
17.5°	211.5
20°	191.1
22.5°	169.8
25°	148.7
27.5°	128.1
30°	108.4
32.5°	89.6
35°	72.9
37.5°	57.8
40°	45.0
42.5°	33.8
45°	24.6
47.5°	18.1
50°	13.1
52.5°	9.2
55°	7.2
57.5°	6.6
60°	5.6
62.5°	4.9
65°	4.3
67.5°	3.6
70°	3.0
72.5°	2.6
75°	2.0
77.5°	1.6
80°	1.3
82.5°	1.0
85°	0.7
87.5°	0.3
90°	0.0

(END OF REPORT)