

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1286967

Luminaire Tested: P3AS09R609030D2WDE010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1286967
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R609030D2WDE010 E3DLP1GPH
Description: 3in Adjustable Dim to Warm LED luminaire with, R60 optic, 3000K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 238.0 lumens
Efficiency: N/A
Efficacy: 16.2 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1286967
CATALOG NUMBER: P3AS09R609030D2WDE010 E3DLP1GPH

Luminous Intensity Polar Plot

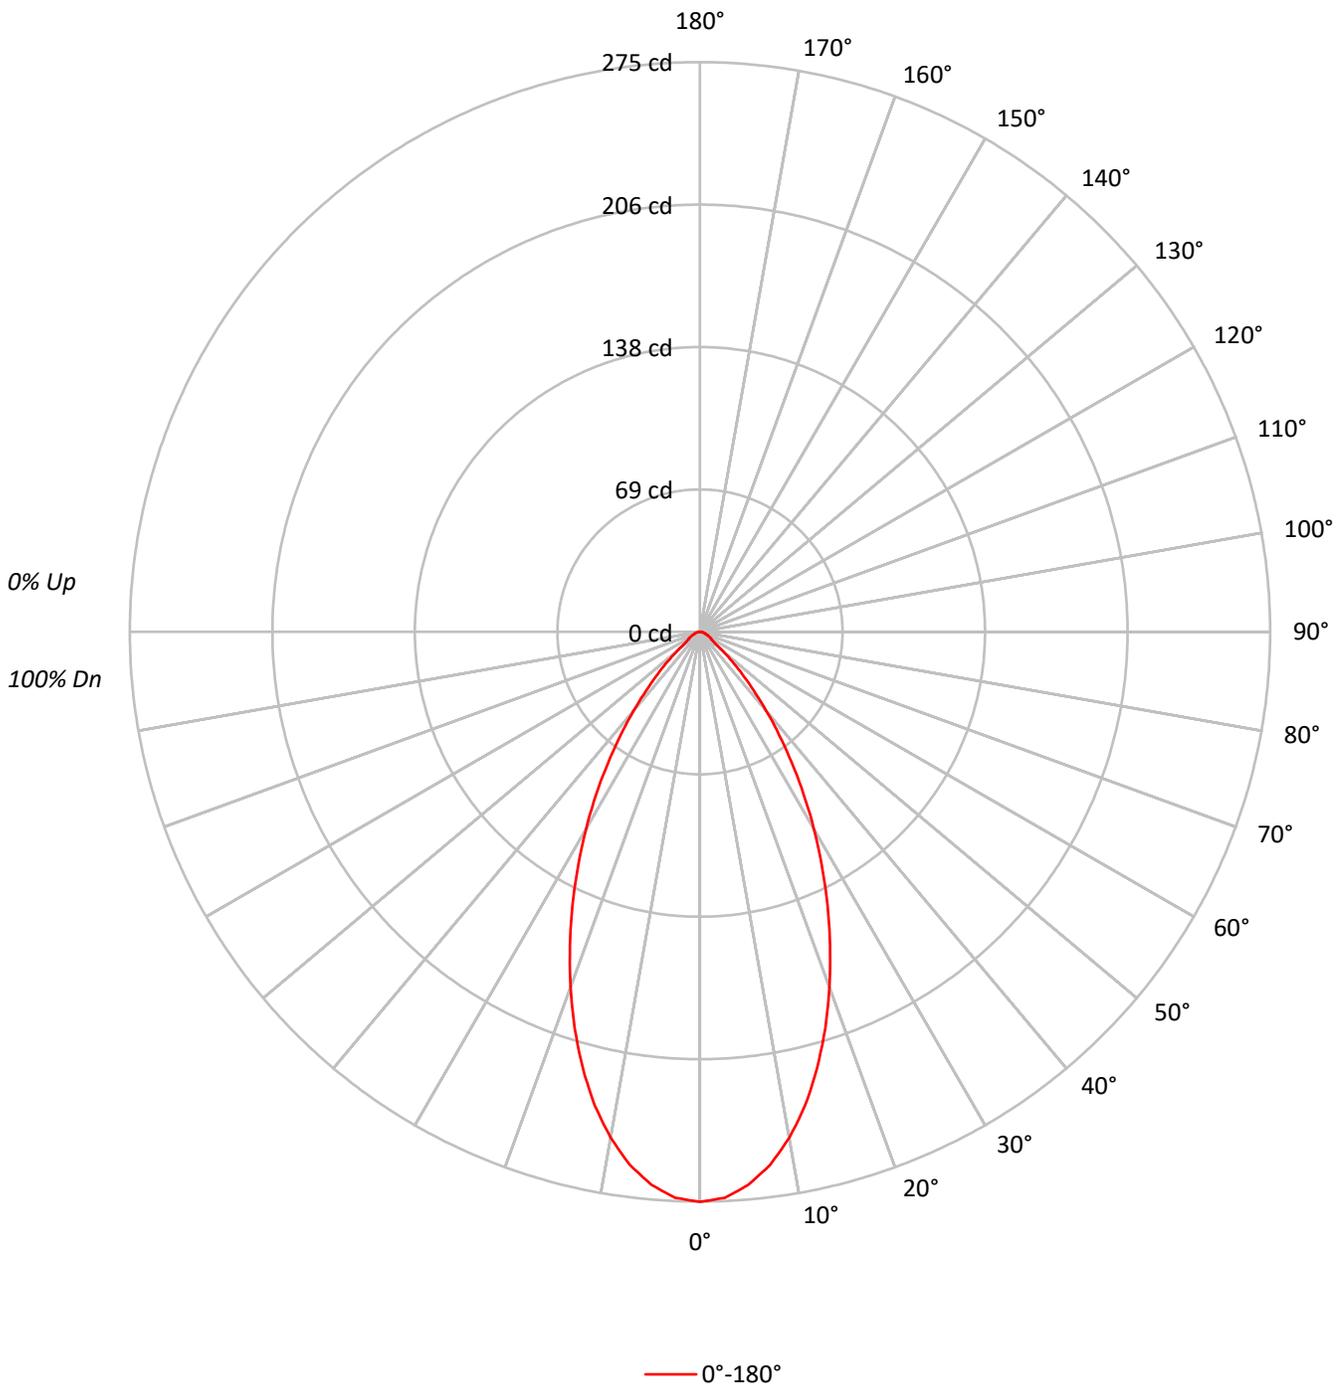



TEST NUMBER: P1286967
 CATALOG NUMBER: P3AS09R609030D2WDE010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92			
2	107	101	97	93	104	100	96	92	96	93	90	93	91	88	91	88	86	85			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			
4	95	87	81	77	93	86	80	76	84	79	75	82	78	74	80	76	73	72			
5	90	81	75	70	88	80	74	70	78	73	69	77	72	69	75	71	68	66			
6	85	76	69	65	84	75	69	65	73	68	64	72	67	64	71	66	63	62			
7	81	71	65	60	79	70	64	60	69	64	60	68	63	59	67	62	59	58			
8	77	67	60	56	75	66	60	56	65	60	56	64	59	55	63	58	55	54			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			
10	69	59	53	49	68	59	53	49	58	53	49	57	52	49	56	52	49	47			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	60324
5°	58970
10°	55198
15°	49535
20°	42587
25°	35204
30°	27827
35°	20666
40°	14227
45°	8931
50°	4912
55°	2867
60°	2588
65°	2231
70°	1859
75°	1949
80°	1642
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 8931 cd/sqm



TEST NUMBER: P1286967

CATALOG NUMBER: P3AS09R609030D2WDE010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	24.9	10.5
10°-20°	60.6	25.5
20°-30°	66.5	27.9
30°-40°	48.4	20.3
40°-50°	22.9	9.6
50°-60°	7.5	3.1
60°-70°	4.3	1.8
70°-80°	2.3	1.0
80°-90°	0.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	152.0	63.9
0°-40°	200.4	84.2
0°-60°	230.7	97.0
0°-90°	238.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	238.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	275	
5°	268	25
15°	218	61
25°	146	66
35°	77	48
45°	29	23
55°	8	7
65°	4	4
75°	2	2
85°	1	1
90°	0	



TEST NUMBER: P1286967
CATALOG NUMBER: P3AS09R609030D2WDE010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	275.1
2.5°	273.4
5°	267.9
7.5°	259.4
10°	247.9
12.5°	234.2
15°	218.2
17.5°	200.8
20°	182.5
22.5°	163.9
25°	145.5
27.5°	127.2
30°	109.9
32.5°	93.2
35°	77.2
37.5°	62.8
40°	49.7
42.5°	38.3
45°	28.8
47.5°	20.9
50°	14.4
52.5°	9.5
55°	7.5
57.5°	6.5
60°	5.9
62.5°	4.9
65°	4.3
67.5°	3.6
70°	2.9
72.5°	2.6
75°	2.3
77.5°	1.6
80°	1.3
82.5°	1.0
85°	0.7
87.5°	0.3
90°	0.0

(END OF REPORT)