

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287031

Luminaire Tested: P3AS13R159030D2WDE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287031
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-4)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R159030D2WDE010 E3CD1MMS
Description: 3in Adjustable Dim to Warm LED luminaire with, R15 optic, 3000K CCT AND, 90CRI ,
E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1362.1 lumens
Efficiency: N/A
Efficacy: 67.8 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287031

CATALOG NUMBER: P3AS13R159030D2WDE010 E3CD1MMS

Luminous Intensity Polar Plot

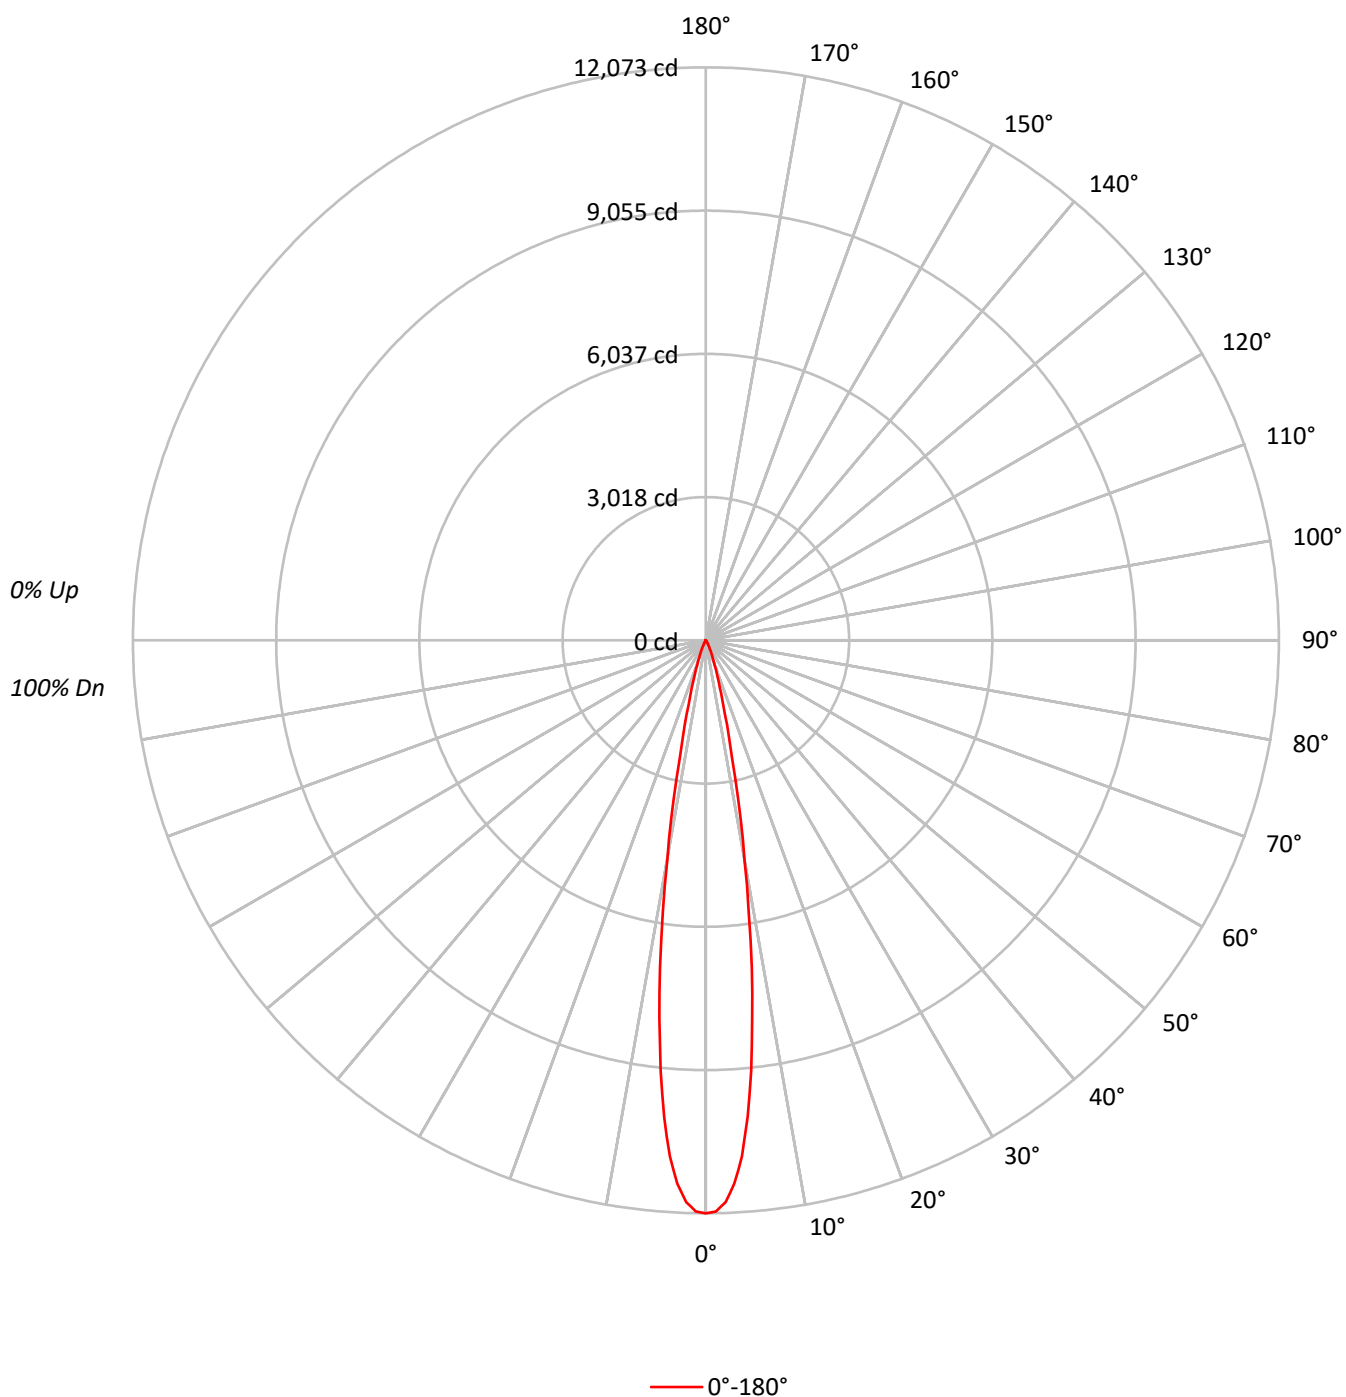

TEST NUMBER: P1287031

CATALOG NUMBER: P3AS13R159030D2WDE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	116	114	112	111	113	112	110	109	108	107	106		104	103	103		101
2	113	110	107	105	111	108	106	104	105	103	101		102	101	99		99
3	110	106	103	100	108	105	102	100	102	100	98		100	98	97		98
4	107	103	100	97	106	102	99	97	100	97	95		98	96	94		97
5	105	100	97	94	104	99	96	94	98	95	93		96	94	92		95
6	103	98	94	92	102	97	94	92	96	93	91		95	92	91		94
7	101	96	92	90	100	95	92	90	94	91	89		93	91	89		92
8	99	94	90	88	98	93	90	88	92	90	88		92	89	87		91
9	97	92	89	87	97	92	89	86	91	88	86		90	88	86		90
10	96	90	87	85	95	90	87	85	89	87	85		89	86	85		88

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2647398
5°	2218792
10°	1045138
15°	315098
20°	116583
25°	45341
30°	16914
35°	5193
40°	1861
45°	992
50°	751
55°	841
60°	965
65°	571
70°	705
75°	932
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 992 cd/sqm

TEST NUMBER: P1287031

CATALOG NUMBER: P3AS13R159030D2WDE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	779.3	57.2
10°-20°	463.2	34.0
20°-30°	97.3	7.1
30°-40°	15.7	1.2
40°-50°	2.7	0.2
50°-60°	2.0	0.1
60°-70°	1.2	0.1
70°-80°	0.7	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1339.8	98.4
0°-40°	1355.5	99.5
0°-60°	1360.2	99.9
0°-90°	1362.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1362.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12073	
5°	10080	779
15°	1388	463
25°	187	97
35°	19	16
45°	3	3
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1287031

CATALOG NUMBER: P3AS13R159030D2WDE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	12073.1
1°	12035.4
2°	11843.8
3°	11460.4
4°	10898.3
5°	10080.0
6°	9118.4
7°	8019.0
8°	6969.1
9°	5780.3
10°	4693.8
12.5°	2532.6
15°	1388.0
17.5°	813.0
20°	499.6
22.5°	305.8
25°	187.4
27.5°	113.1
30°	66.8
32.5°	37.7
35°	19.4
37.5°	10.8
40°	6.5
42.5°	4.3
45°	3.2
47.5°	2.2
50°	2.2
52.5°	2.2
55°	2.2
57.5°	2.2
60°	2.2
62.5°	1.1
65°	1.1
67.5°	1.1
70°	1.1
72.5°	1.1
75°	1.1
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)