

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287037

Luminaire Tested: P3AS13R159030D2WDE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287037
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R159030D2WDE010 E3D1WMH
Description: 3in Adjustable Dim to Warm LED luminaire with, R15 optic, 3000K CCT AND, 90CRI , E3D1WM TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1392.0 lumens
Efficiency: N/A
Efficacy: 69.3 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287037

CATALOG NUMBER: P3AS13R159030D2WDE010 E3D1WMH

Luminous Intensity Polar Plot

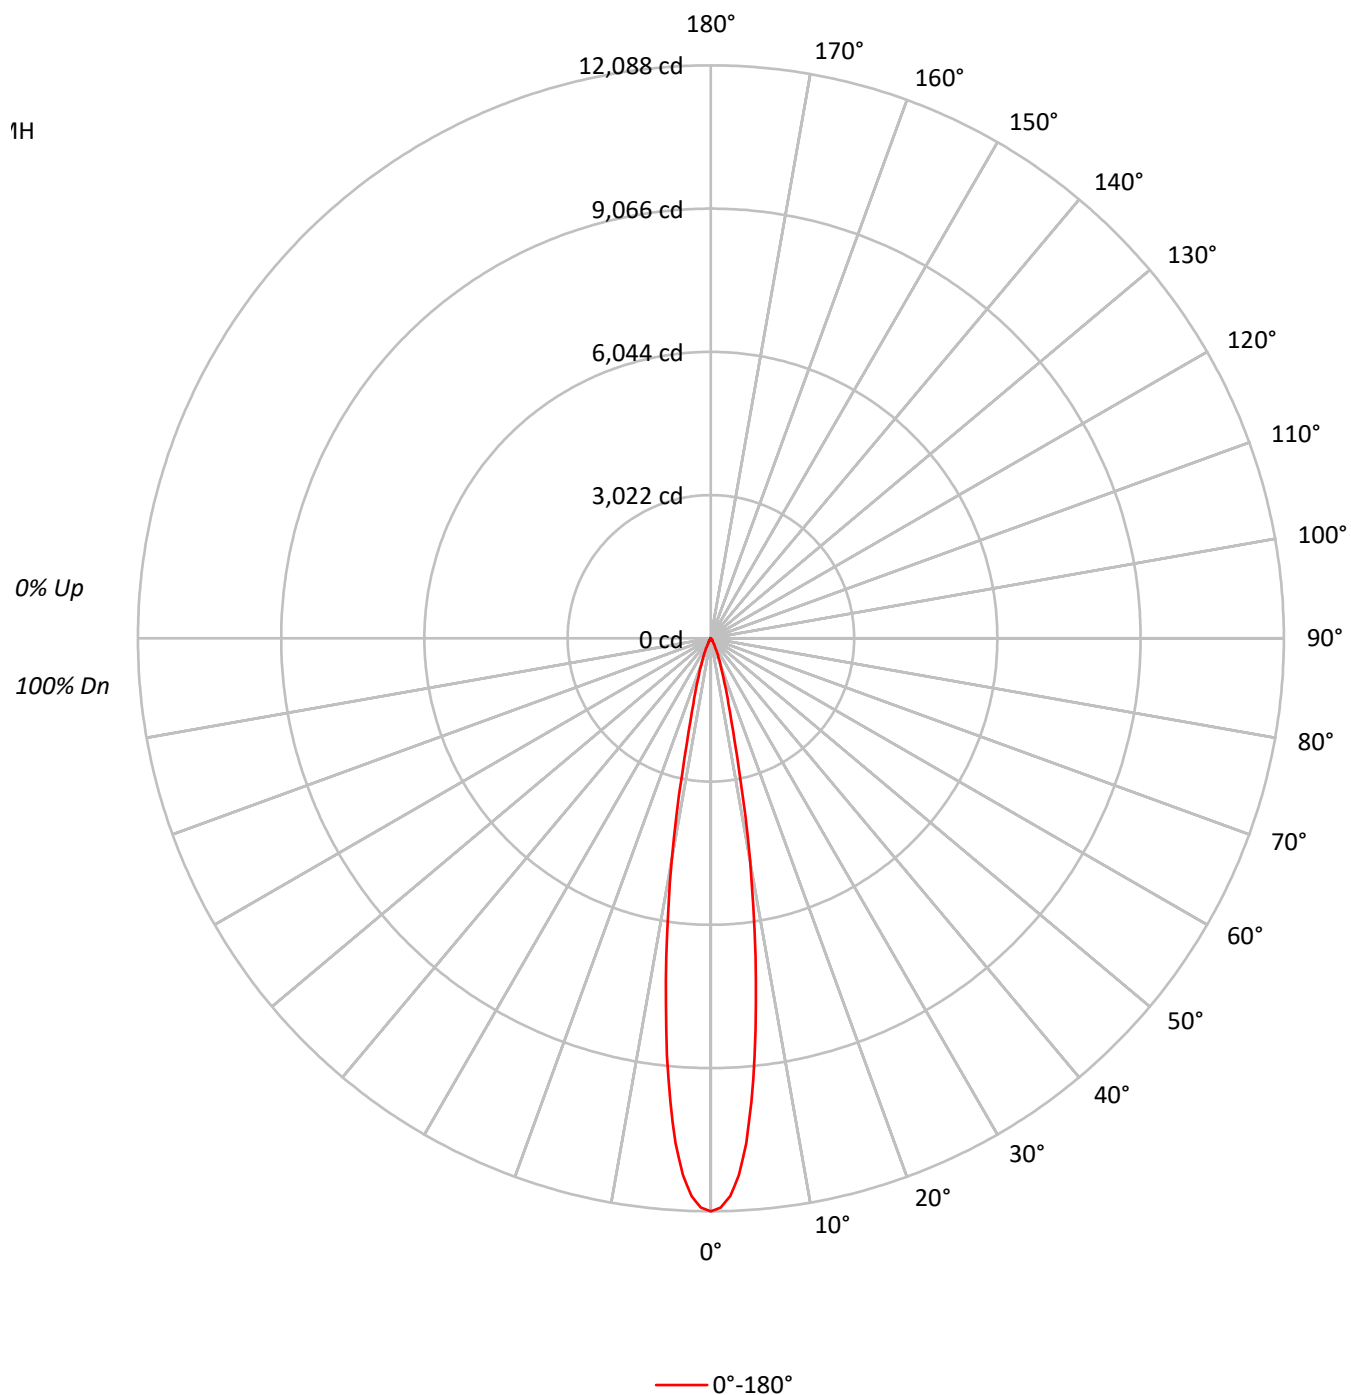

TEST NUMBER: P1287037

CATALOG NUMBER: P3AS13R159030D2WDE010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	116	114	112	111	113	112	110	109	108	107	105		104	103	102		101
2	112	109	107	105	110	108	105	103	105	103	101		102	100	99		99
3	110	106	102	100	108	104	102	99	102	100	98		100	98	96		98
4	107	102	99	96	106	101	98	96	99	97	95		98	96	94		96
5	105	100	96	94	103	99	96	93	97	94	92		96	93	92		94
6	102	97	94	91	101	96	93	91	95	92	90		94	92	90		93
7	100	95	91	89	99	94	91	89	93	90	88		92	90	88		91
8	98	93	89	87	97	92	89	87	91	89	87		91	88	86		90
9	96	91	88	85	96	91	87	85	90	87	85		89	87	85		89
10	95	89	86	84	94	89	86	84	88	85	83		88	85	83		87

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2650731
5°	2161496
10°	1058564
15°	323997
20°	137212
25°	62060
30°	24181
35°	11163
40°	3464
45°	1302
50°	546
55°	191
60°	219
65°	259
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1302 cd/sqm

TEST NUMBER: P1287037

CATALOG NUMBER: P3AS13R159030D2WDE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	764.3	54.9
10°-20°	469.0	33.7
20°-30°	126.0	9.1
30°-40°	27.7	2.0
40°-50°	3.9	0.3
50°-60°	0.7	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1359.3	97.7
0°-40°	1387.1	99.6
0°-60°	1391.6	100.0
0°-90°	1392.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1392.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12088	
5°	9820	764
15°	1427	469
25°	256	126
35°	42	28
45°	4	4
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1287037

CATALOG NUMBER: P3AS13R159030D2WDE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	12088.3
1°	12012.8
2°	11770.5
3°	11334.0
4°	10676.9
5°	9819.7
6°	8850.1
7°	7770.1
8°	6777.8
9°	5725.9
10°	4754.1
11°	3792.4
12°	2917.8
13°	2244.3
14°	1776.7
15°	1427.2
17.5°	884.6
20°	588.0
22.5°	395.9
25°	256.5
27.5°	152.0
30°	95.5
32.5°	64.4
35°	41.7
37.5°	23.2
40°	12.1
42.5°	6.9
45°	4.2
47.5°	2.6
50°	1.6
52.5°	1.1
55°	0.5
57.5°	0.5
60°	0.5
62.5°	0.5
65°	0.5
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1287037

CATALOG NUMBER: P3AS13R159030D2WDE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)