

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287066

Luminaire Tested: P3AS13R209030D2WDE010 E3D1LI

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1287066  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R209030D2WDE010 E3D1LI  
Description: 3in Adjustable Dim to Warm LED luminaire with, R20 optic, 3000K CCT AND, 90CRI , E3D1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1350.0 lumens  
Efficiency: N/A  
Efficacy: 67.2 lumens/watt  
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 20.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1287066  
CATALOG NUMBER: P3AS13R209030D2WDE010 E3D1LI

### Luminous Intensity Polar Plot

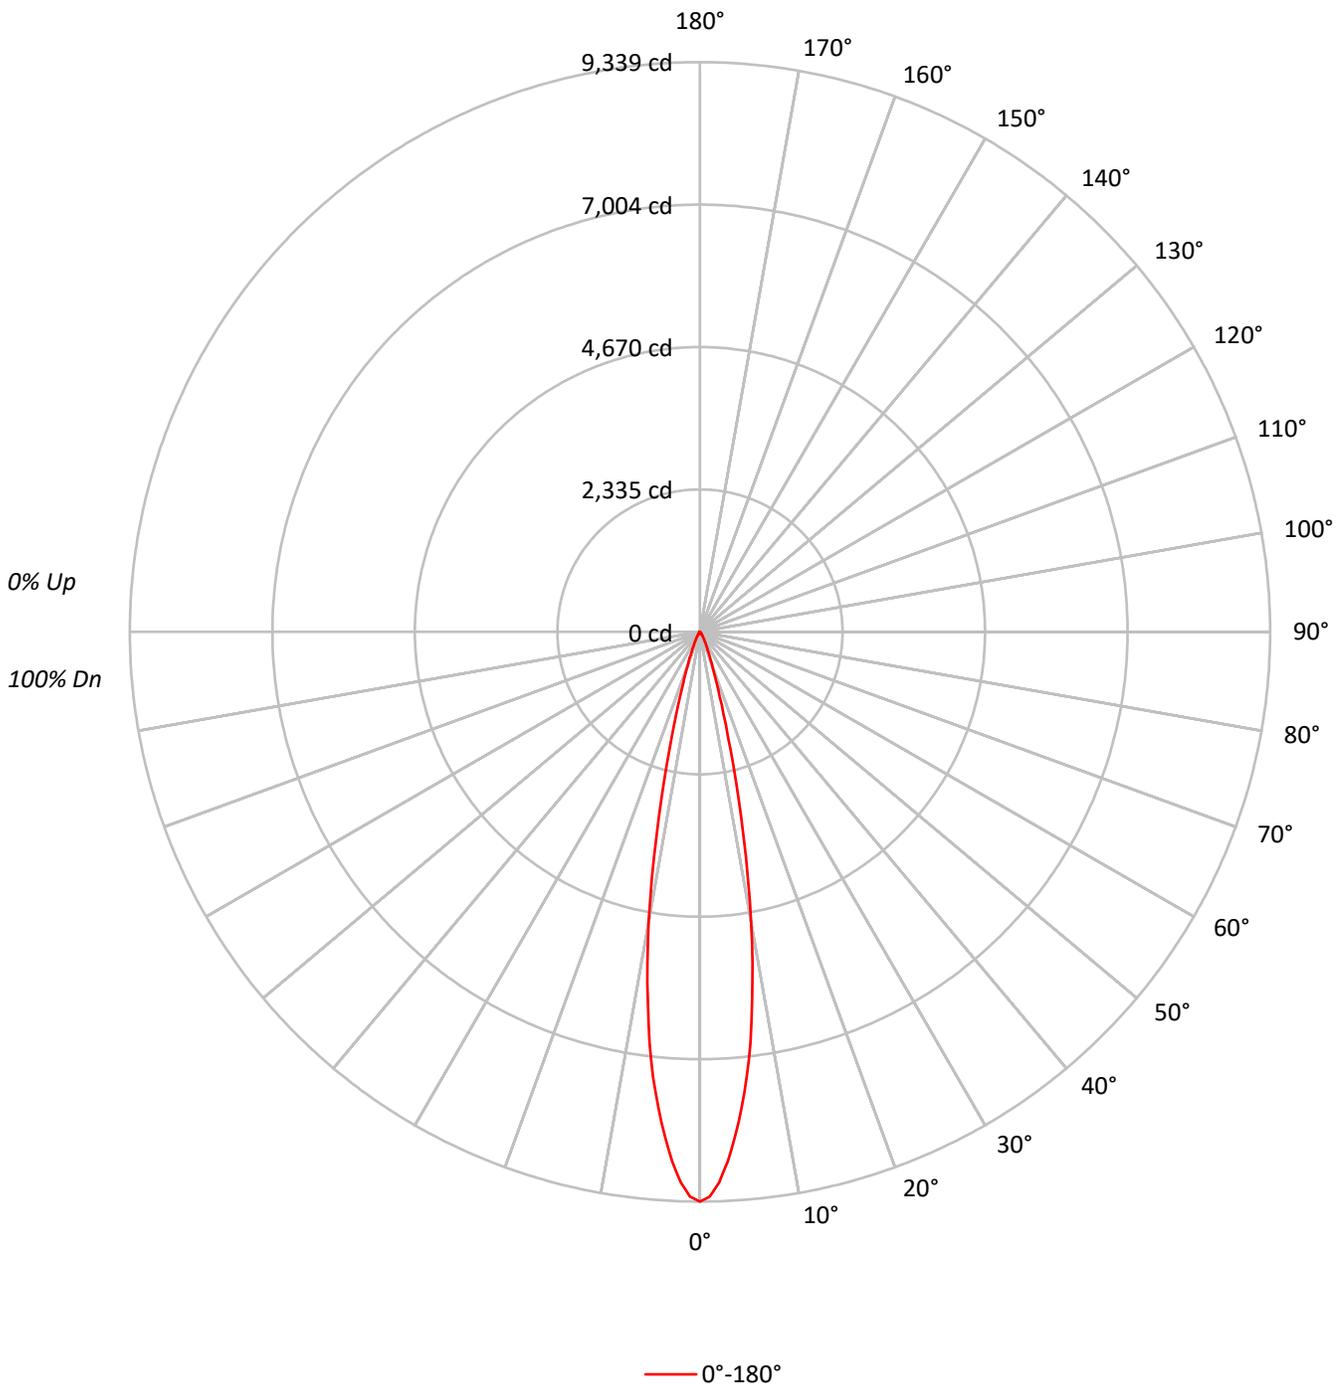



TEST NUMBER: P1287066  
 CATALOG NUMBER: P3AS13R209030D2WDE010 E3D1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	99	100
1	115	114	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	97	97
2	112	109	106	104	110	107	105	103	104	102	101	101	100	98	99	98	96	95	95	95	95
3	109	105	102	99	107	104	101	98	101	99	97	99	97	95	97	95	94	93	93	93	93
4	106	101	98	95	105	100	97	95	99	96	94	97	95	93	95	93	92	91	91	91	91
5	104	98	95	92	102	98	94	92	96	93	91	95	92	90	93	91	90	89	89	89	89
6	101	96	92	89	100	95	92	89	94	91	89	93	90	88	92	89	88	87	87	87	87
7	99	93	90	87	98	93	89	87	92	89	86	91	88	86	90	87	86	85	85	85	85
8	97	91	87	85	96	91	87	85	90	87	85	89	86	84	88	86	84	83	83	83	83
9	95	89	85	83	94	89	85	83	88	85	83	87	84	83	87	84	82	81	81	81	81
10	93	87	84	81	92	87	83	81	86	83	81	86	83	81	85	83	81	80	80	80	80

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	2047840
5°	1724187
10°	1076912
15°	402613
20°	138192
25°	57608
30°	27118
35°	12153
40°	5754
45°	2946
50°	1092
55°	191
60°	219
65°	259
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2946 cd/sqm



TEST NUMBER: P1287066  
 CATALOG NUMBER: P3AS13R209030D2WDE010 E3D1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	651.4	48.3
10°-20°	536.5	39.7
20°-30°	121.9	9.0
30°-40°	31.0	2.3
40°-50°	7.8	0.6
50°-60°	1.0	0.1
60°-70°	0.3	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1309.8	97.0
0°-40°	1340.9	99.3
0°-60°	1349.7	100.0
0°-90°	1350.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1350.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	9339	
5°	7833	651
15°	1774	537
25°	238	122
35°	45	31
45°	10	8
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1287066  
CATALOG NUMBER: P3AS13R209030D2WDE010 E3D1LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	9338.9
1°	9259.7
2°	9026.4
3°	8691.8
4°	8281.1
5°	7833.0
6°	7333.7
7°	6782.6
8°	6139.7
9°	5502.6
10°	4836.5
11°	4127.6
12°	3419.8
13°	2820.2
14°	2247.0
15°	1773.5
16°	1399.8
17°	1104.2
18°	887.3
19°	721.5
20°	592.2
21°	495.1
22°	413.3
23°	343.6
24°	286.6
25°	238.1
27.5°	155.7
30°	107.1
32.5°	66.0
35°	45.4
37.5°	29.0
40°	20.1
42.5°	13.7
45°	9.5
47.5°	6.3
50°	3.2
52.5°	1.6
55°	0.5
57.5°	0.5
60°	0.5
62.5°	0.5
65°	0.5
67.5°	0.0
70°	0.0
72.5°	0.0



TEST NUMBER: P1287066  
CATALOG NUMBER: P3AS13R209030D2WDE010 E3D1LI

**CANDELA DISTRIBUTION (continued):**

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)