

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287111

Luminaire Tested: P3AS13R259030D2WDE010 E3DLP1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287111
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-9)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R259030D2WDE010 E3DLP1MW
Description: 3in Adjustable Dim to Warm LED luminaire with, R25 optic, 3000K CCT AND, 90CRI ,
E3DLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 691.0 lumens
Efficiency: N/A
Efficacy: 34.4 lumens/watt
Spacing Criteria (0/90/45): 0.62 / 0.62 / 0.68
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287111

CATALOG NUMBER: P3AS13R259030D2WDE010 E3DLP1MW

Luminous Intensity Polar Plot

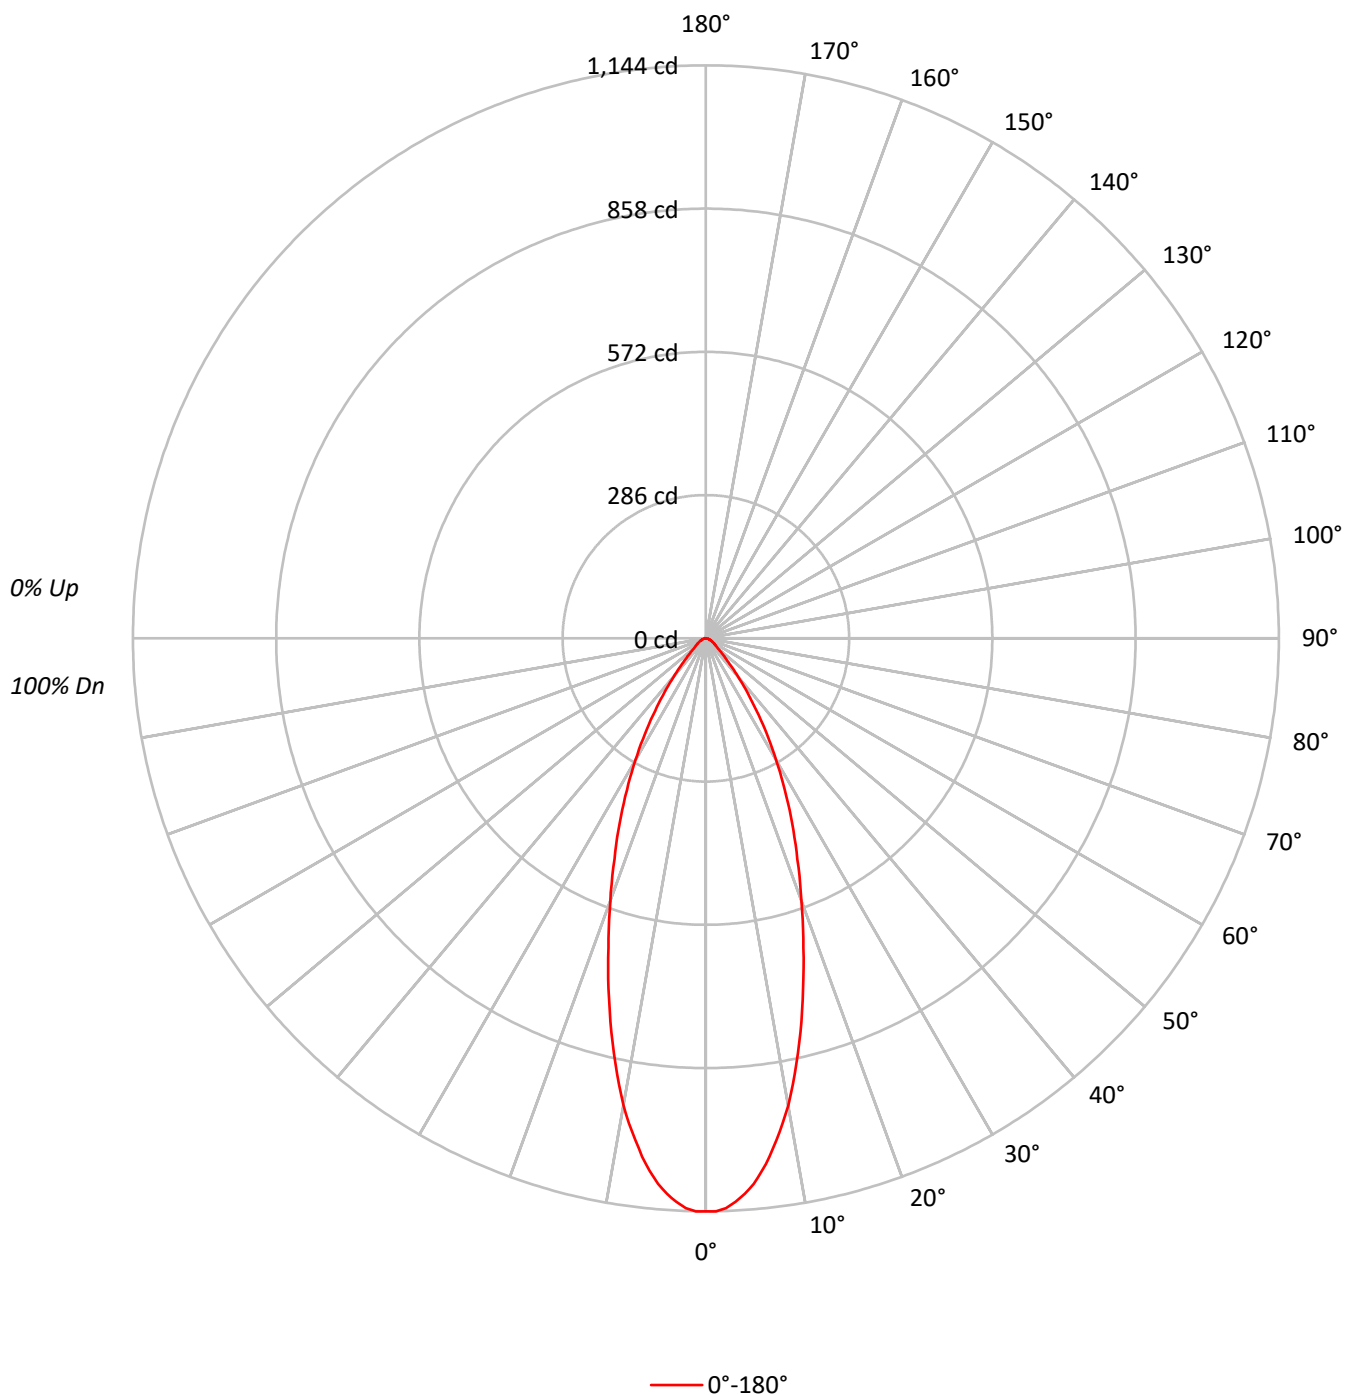

TEST NUMBER: P1287111

CATALOG NUMBER: P3AS13R259030D2WDE010 E3DLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	101		100	99	98		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	95	90	86	100	94	89	86	91	87	84		89	86	83		87
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82
5	92	84	78	74	91	83	77	73	81	76	73		79	75	72		78
6	88	79	73	69	86	78	72	68	77	72	68		75	71	67		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	80	70	65	60	79	70	64	60	69	64	60		68	63	60		67
9	76	67	61	57	75	66	61	57	65	60	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	250879
5°	240677
10°	210840
15°	169467
20°	130211
25°	98522
30°	71201
35°	47301
40°	28682
45°	16715
50°	10644
55°	8640
60°	7543
65°	6693
70°	5514
75°	5507
80°	4041
85°	5535

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 16715 cd/sqm

TEST NUMBER: P1287111

CATALOG NUMBER: P3AS13R259030D2WDE010 E3DLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	99.5	14.4
10°-20°	206.4	29.9
20°-30°	186.7	27.0
30°-40°	112.2	16.2
40°-50°	44.6	6.4
50°-60°	20.5	3.0
60°-70°	12.5	1.8
70°-80°	6.7	1.0
80°-90°	1.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	492.7	71.3
0°-40°	604.8	87.5
0°-60°	669.9	96.9
0°-90°	691.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	691.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1144	
5°	1093	100
15°	746	206
25°	407	187
35°	177	112
45°	54	45
55°	23	21
65°	13	13
75°	6	7
85°	2	2
90°	0	

TEST NUMBER: P1287111

CATALOG NUMBER: P3AS13R259030D2WDE010 E3DLP1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1144.1
1°	1144.1
2°	1138.7
3°	1126.8
4°	1111.7
5°	1093.4
6°	1069.7
7°	1042.8
8°	1011.6
9°	980.3
10°	946.9
11°	908.1
12°	868.3
13°	828.4
14°	788.6
15°	746.5
17.5°	647.4
20°	558.0
22.5°	477.2
25°	407.2
27.5°	341.5
30°	281.2
32.5°	226.2
35°	176.7
37.5°	134.7
40°	100.2
42.5°	73.3
45°	53.9
47.5°	40.9
50°	31.2
52.5°	25.9
55°	22.6
57.5°	19.4
60°	17.2
62.5°	14.0
65°	12.9
67.5°	10.8
70°	8.6
72.5°	7.5
75°	6.5
77.5°	5.4
80°	3.2
82.5°	2.2
85°	2.2
87.5°	1.1



TEST NUMBER: P1287111

CATALOG NUMBER: P3AS13R259030D2WDE010 E3DLP1MW

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)