

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287145

Luminaire Tested: P3AS13R309030D2WDE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287145
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-13)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R309030D2WDE010 E3DLP1WMH
Description: 3in Adjustable Dim to Warm LED luminaire with, R30 optic, 3000K CCT AND, 90CRI ,
E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 694.1 lumens
Efficiency: N/A
Efficacy: 34.5 lumens/watt
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.7
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287145

CATALOG NUMBER: P3AS13R309030D2WDE010 E3DLP1WMH

Luminous Intensity Polar Plot

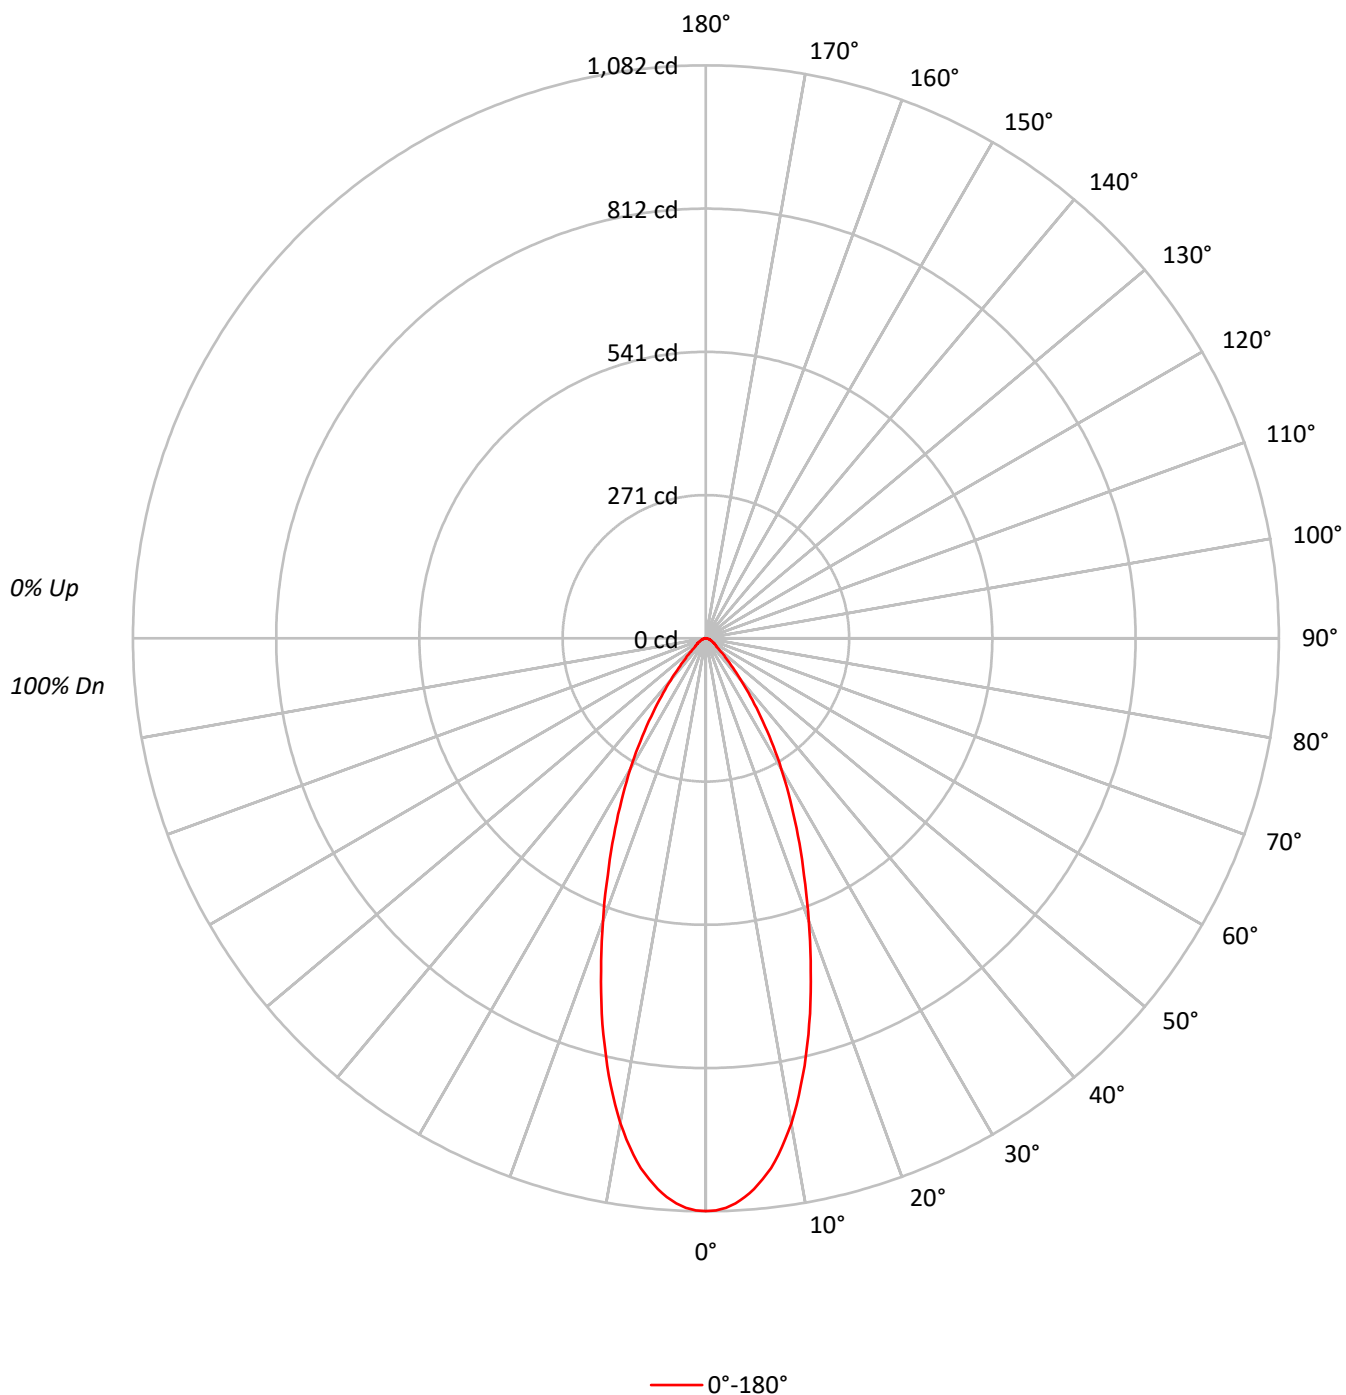



TEST NUMBER: P1287145

CATALOG NUMBER: P3AS13R309030D2WDE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	95	105	101	97	94	97	94	92		94	92	90		92
3	102	95	90	86	100	94	89	85	91	87	84		89	86	83		87
4	97	89	84	79	95	88	83	79	86	81	78		84	80	77		82
5	92	84	78	73	90	83	77	73	81	76	72		79	75	72		78
6	88	79	73	68	86	78	72	68	76	71	68		75	71	67		74
7	83	74	68	64	82	74	68	64	72	67	63		71	67	63		70
8	80	70	64	60	78	70	64	60	69	63	60		67	63	60		67
9	76	67	61	57	75	66	60	57	65	60	56		64	60	56		63
10	73	63	58	54	72	63	57	54	62	57	53		61	57	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	237152
5°	229759
10°	207032
15°	171261
20°	132592
25°	99465
30°	72214
35°	48104
40°	29570
45°	17366
50°	10644
55°	8640
60°	7543
65°	6123
70°	5514
75°	5507
80°	4041
85°	5535

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 17366 cd/sqm

TEST NUMBER: P1287145

CATALOG NUMBER: P3AS13R309030D2WDE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	96.0	13.8
10°-20°	207.8	29.9
20°-30°	189.0	27.2
30°-40°	114.3	16.5
40°-50°	45.8	6.6
50°-60°	20.3	2.9
60°-70°	12.2	1.8
70°-80°	6.7	1.0
80°-90°	1.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	492.8	71.0
0°-40°	607.1	87.5
0°-60°	673.2	97.0
0°-90°	694.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	694.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1082	
5°	1044	96
15°	754	208
25°	411	189
35°	180	114
45°	56	46
55°	23	20
65°	12	12
75°	6	7
85°	2	2
90°	0	

TEST NUMBER: P1287145

CATALOG NUMBER: P3AS13R309030D2WDE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1081.5
1°	1080.4
2°	1076.1
3°	1068.6
4°	1057.8
5°	1043.8
6°	1026.6
7°	1008.3
8°	984.7
9°	957.7
10°	929.8
11°	897.5
12°	863.1
13°	828.6
14°	791.0
15°	754.4
17.5°	658.6
20°	568.2
22.5°	484.3
25°	411.1
27.5°	344.4
30°	285.2
32.5°	230.3
35°	179.7
37.5°	137.7
40°	103.3
42.5°	75.3
45°	56.0
47.5°	42.0
50°	31.2
52.5°	24.8
55°	22.6
57.5°	19.4
60°	17.2
62.5°	14.0
65°	11.8
67.5°	10.8
70°	8.6
72.5°	7.5
75°	6.5
77.5°	5.4
80°	3.2
82.5°	2.2
85°	2.2
87.5°	1.1



TEST NUMBER: P1287145

CATALOG NUMBER: P3AS13R309030D2WDE010 E3DLP1WMH

CANDELA DISTRIBUTION (continued):



(END OF REPORT)