

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287207

Luminaire Tested: P3AS13R459030D2WDE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287207
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-28)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R459030D2WDE010 E3CB1MMS
Description: 3in Adjustable Dim to Warm LED luminaire with, R45 optic, 3000K CCT AND, 90CRI ,
E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1444.0 lumens
Efficiency: N/A
Efficacy: 71.8 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.66
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287207

CATALOG NUMBER: P3AS13R459030D2WDE010 E3CB1MMS

Luminous Intensity Polar Plot

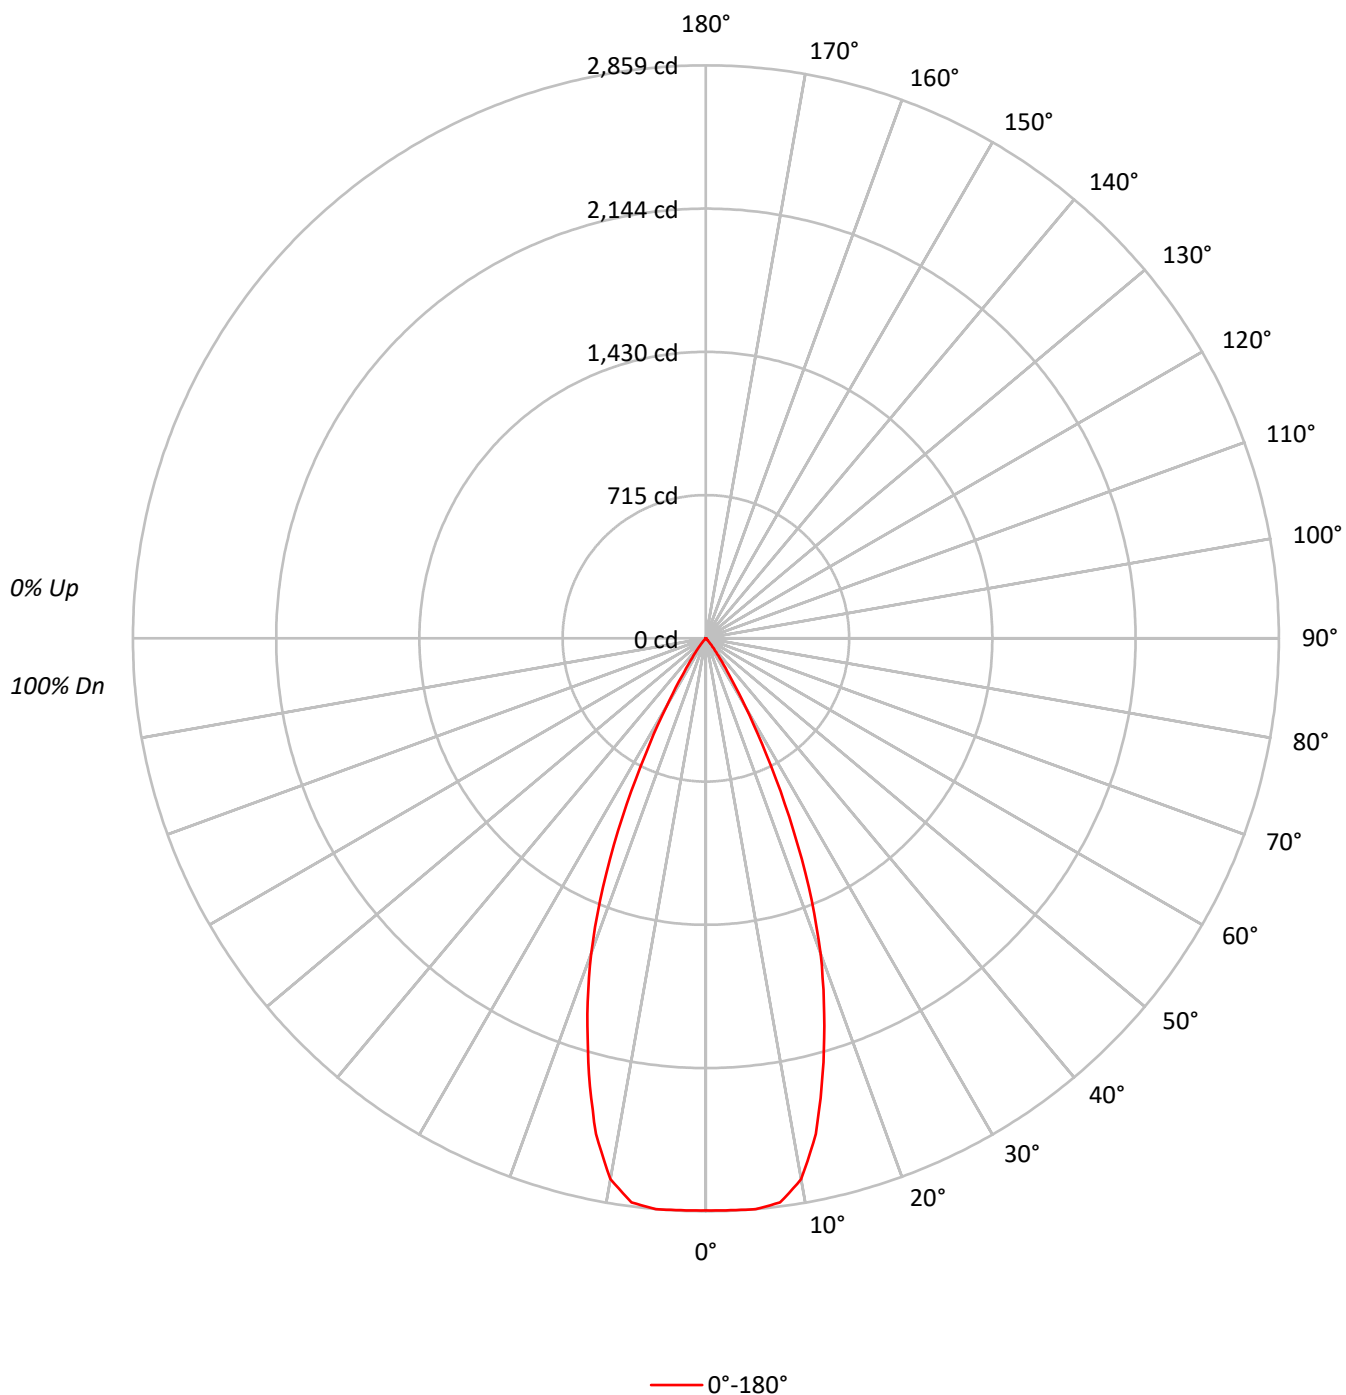

TEST NUMBER: P1287207

CATALOG NUMBER: P3AS13R459030D2WDE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99	98	97	95
2	110	106	102	100	108	104	101	98	101	98	96		98	96	94		95	94	92	91
3	106	100	96	93	104	99	95	92	96	93	91		94	91	89		92	90	88	86
4	102	95	91	87	100	94	90	87	92	89	86		90	87	85		88	86	84	82
5	98	91	86	82	96	90	85	82	88	84	81		87	83	81		85	82	80	79
6	94	87	82	78	93	86	81	78	85	80	77		83	80	77		82	79	76	75
7	90	83	78	74	89	82	78	74	81	77	74		80	76	74		79	76	73	72
8	87	79	74	71	86	79	74	71	78	74	71		77	73	70		76	73	70	69
9	84	76	71	68	83	76	71	68	75	71	68		74	70	67		73	70	67	66
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71	67	65	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	626046
5°	629384
10°	610053
15°	511217
20°	390797
25°	237909
30°	98977
35°	31722
40°	9876
45°	2016
50°	1467
55°	1644
60°	1403
65°	1660
70°	1410
75°	1864
80°	1389
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2016 cd/sqm

TEST NUMBER: P1287207

CATALOG NUMBER: P3AS13R459030D2WDE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	269.7	18.7
10°-20°	618.9	42.9
20°-30°	445.6	30.9
30°-40°	92.7	6.4
40°-50°	8.5	0.6
50°-60°	3.5	0.2
60°-70°	2.8	0.2
70°-80°	1.9	0.1
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1334.2	92.4
0°-40°	1427.0	98.8
0°-60°	1438.9	99.6
0°-90°	1444.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1444.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2855	
5°	2859	270
15°	2252	619
25°	983	446
35°	118	93
45°	6	8
55°	4	3
65°	3	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1287207

CATALOG NUMBER: P3AS13R459030D2WDE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	2855.0
2.5°	2856.1
5°	2859.3
7.5°	2838.9
10°	2739.8
12.5°	2533.0
15°	2251.9
17.5°	1964.4
20°	1674.7
22.5°	1341.9
25°	983.3
27.5°	648.3
30°	390.9
32.5°	218.6
35°	118.5
37.5°	66.8
40°	34.5
42.5°	15.1
45°	6.5
47.5°	4.3
50°	4.3
52.5°	4.3
55°	4.3
57.5°	3.2
60°	3.2
62.5°	3.2
65°	3.2
67.5°	2.2
70°	2.2
72.5°	2.2
75°	2.2
77.5°	1.1
80°	1.1
82.5°	1.1
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)