

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287223

Luminaire Tested: P3AS13R459030D2WDE010 E3DLD1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287223
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R459030D2WDE010 E3DLD1WH
Description: 3in Adjustable Dim to Warm LED luminaire with, R45 optic, 3000K CCT AND, 90CRI ,
E3DLD1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 934.0 lumens
Efficiency: N/A
Efficacy: 46.5 lumens/watt
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287223

CATALOG NUMBER: P3AS13R459030D2WDE010 E3DLD1WH

Luminous Intensity Polar Plot

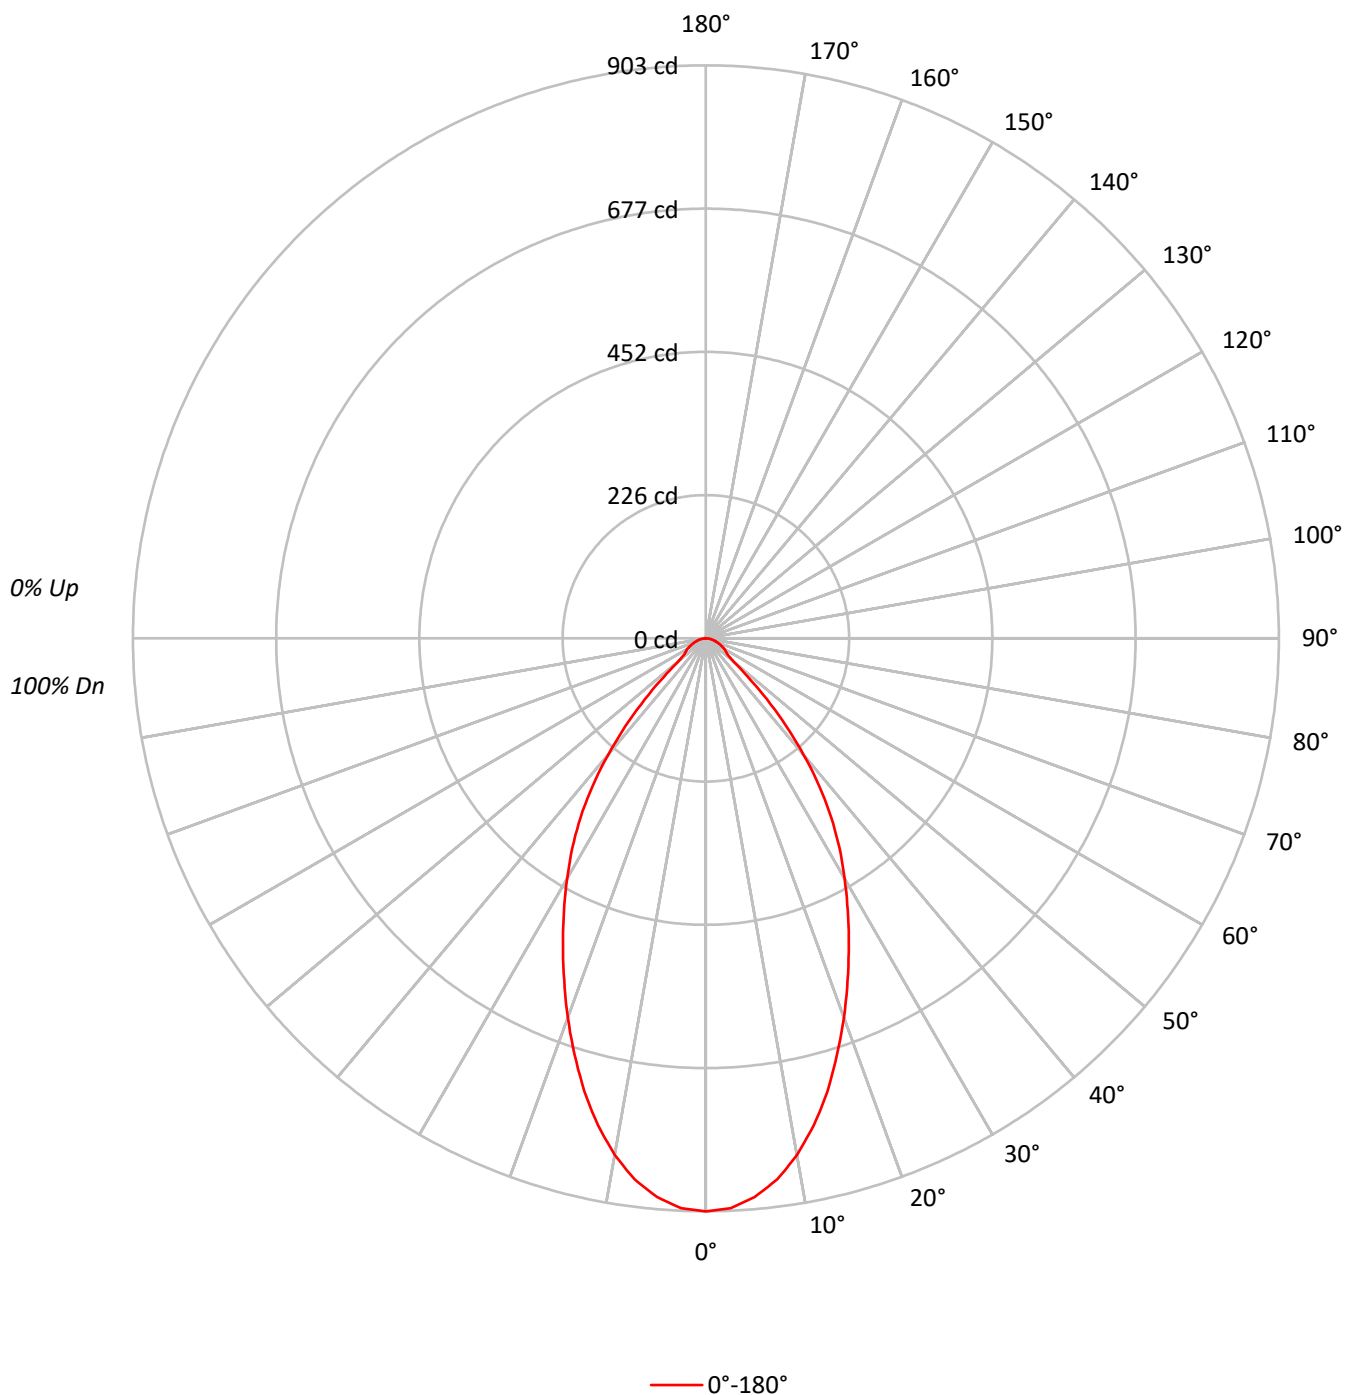



TEST NUMBER: P1287223

CATALOG NUMBER: P3AS13R459030D2WDE010 E3DLD1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		0
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		100
1	112	109	106	104	110	107	104	102	103	101	99		99	97	96		91
2	106	100	95	91	103	98	94	90	95	91	88		92	89	86		83
3	99	92	86	82	97	90	85	81	88	83	80		85	81	78		75
4	94	85	78	74	92	84	78	73	81	76	72		79	75	71		69
5	88	79	72	67	86	78	71	67	76	70	66		74	69	65		63
6	83	73	66	61	81	72	66	61	71	65	61		69	64	60		58
7	78	68	61	57	77	67	61	56	66	60	56		65	60	56		54
8	74	64	57	52	73	63	57	52	62	56	52		61	56	52		50
9	70	60	53	49	69	59	53	49	58	52	48		57	52	48		47
10	67	56	50	45	66	56	49	45	55	49	45		54	49	45		44

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	198032
5°	194519
10°	184076
15°	167878
20°	148436
25°	128911
30°	110650
35°	92193
40°	68700
45°	42051
50°	19445
55°	15216
60°	14648
65°	13387
70°	12438
75°	11861
80°	10860
85°	8051

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 42051 cd/sqm

TEST NUMBER: P1287223

CATALOG NUMBER: P3AS13R459030D2WDE010 E3DLD1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	82.6	8.8
10°-20°	205.9	22.0
20°-30°	244.6	26.2
30°-40°	212.5	22.8
40°-50°	106.6	11.4
50°-60°	37.0	4.0
60°-70°	25.9	2.8
70°-80°	14.5	1.6
80°-90°	4.4	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	533.1	57.1
0°-40°	745.6	79.8
0°-60°	889.1	95.2
0°-90°	934.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	934.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	903	
5°	884	83
15°	740	206
25°	533	245
35°	344	213
45°	136	107
55°	40	37
65°	26	26
75°	14	14
85°	3	4
90°	0	

TEST NUMBER: P1287223

CATALOG NUMBER: P3AS13R459030D2WDE010 E3DLD1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	903.1
2.5°	898.8
5°	883.7
7.5°	860.0
10°	826.7
12.5°	785.8
15°	739.5
17.5°	687.8
20°	636.1
22.5°	583.4
25°	532.8
27.5°	484.4
30°	437.0
32.5°	391.8
35°	344.4
37.5°	293.9
40°	240.0
42.5°	187.3
45°	135.6
47.5°	89.3
50°	57.0
52.5°	44.1
55°	39.8
57.5°	36.6
60°	33.4
62.5°	30.1
65°	25.8
67.5°	22.6
70°	19.4
72.5°	16.1
75°	14.0
77.5°	10.8
80°	8.6
82.5°	6.5
85°	3.2
87.5°	2.2
90°	0.0

(END OF REPORT)