

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287319

Luminaire Tested: P3AS13R659030D2WDE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287319
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-44)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R659030D2WDE010 E3CB1MMS
Description: 3in Adjustable Dim to Warm LED luminaire with, R65 optic, 3000K CCT AND, 90CRI ,
E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1332.0 lumens
Efficiency: N/A
Efficacy: 66.3 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.9
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 20.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287319

CATALOG NUMBER: P3AS13R659030D2WDE010 E3CB1MMS

Luminous Intensity Polar Plot

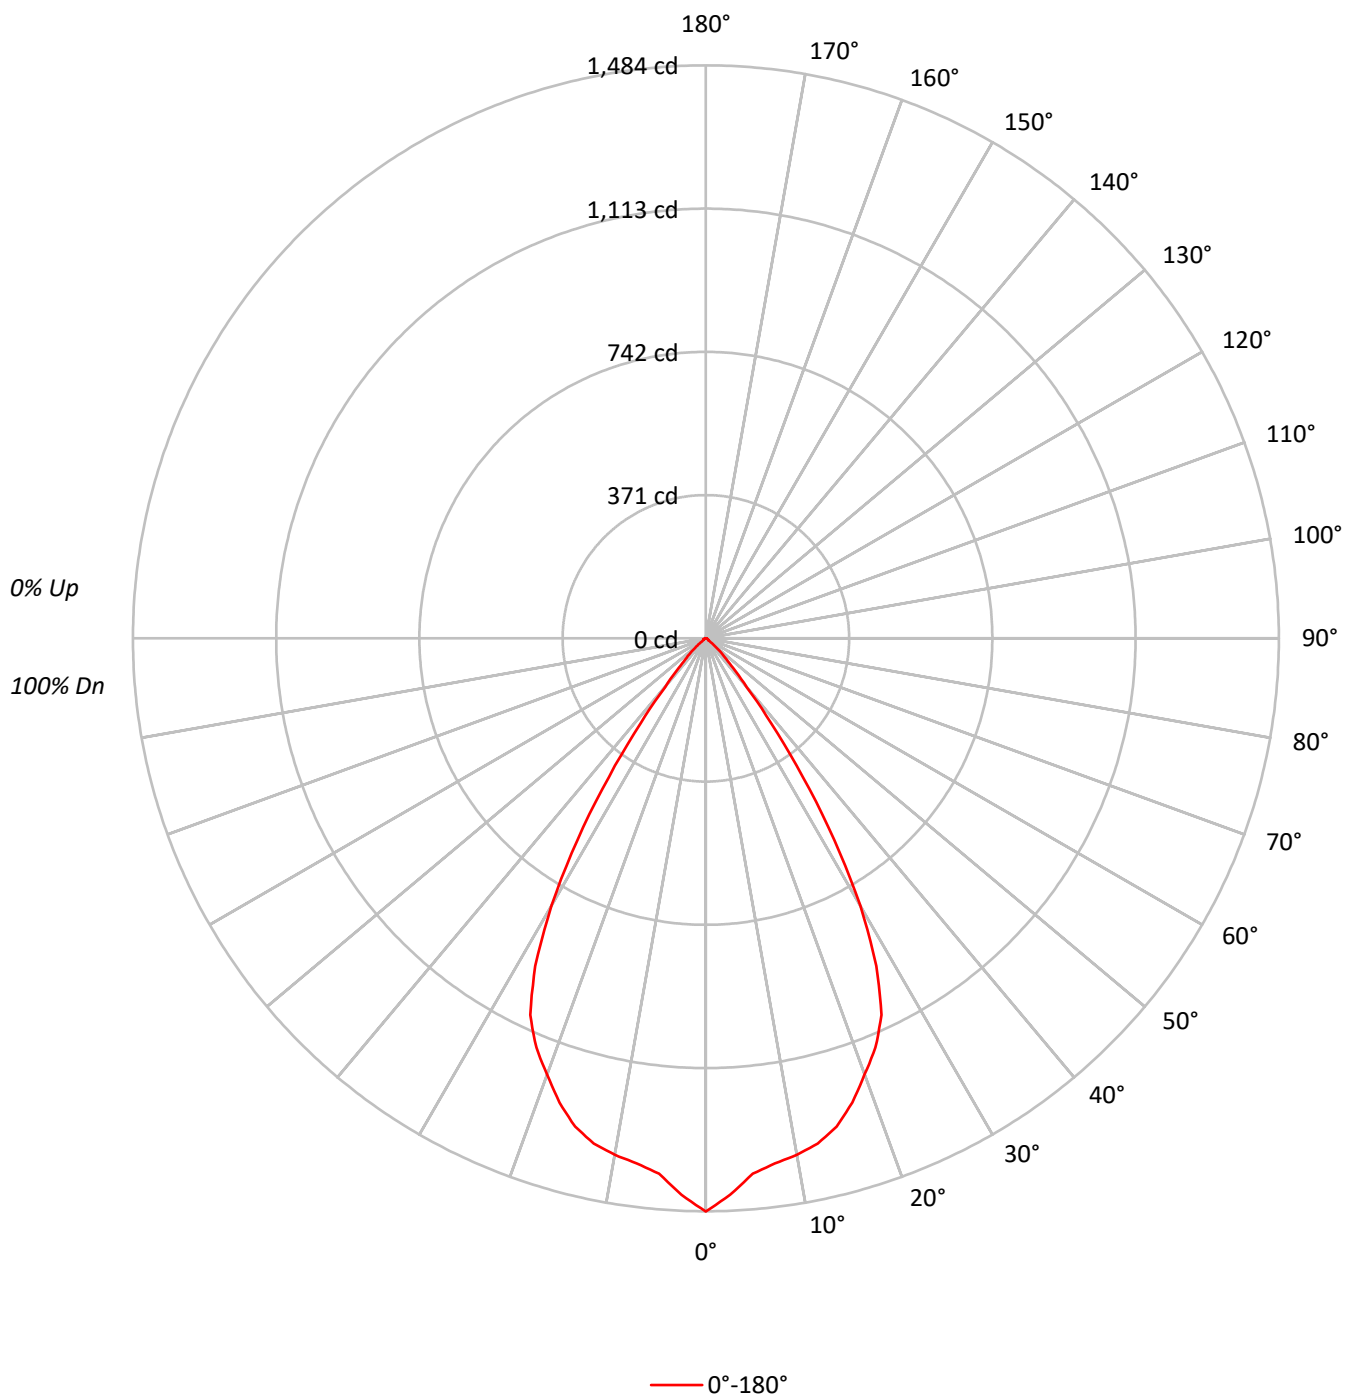

TEST NUMBER: P1287319

CATALOG NUMBER: P3AS13R659030D2WDE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	101	98	95	98	95	93		95	93	91		92
3	103	96	91	87	101	95	90	87	92	88	85		90	87	84		88
4	97	90	84	80	96	89	84	80	87	82	79		85	81	78		83
5	93	84	78	74	91	83	78	74	82	77	73		80	76	73		78
6	88	79	73	69	86	78	73	69	77	72	68		75	71	68		74
7	84	74	68	64	82	74	68	64	72	67	64		71	67	63		70
8	80	70	64	60	78	69	64	60	68	63	60		67	63	59		66
9	76	66	60	56	75	66	60	56	65	60	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		60	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	325522
5°	306361
10°	302466
15°	297141
20°	280538
25°	260386
30°	202386
35°	117089
40°	47174
45°	21708
50°	8460
55°	3288
60°	2851
65°	2802
70°	2757
75°	2711
80°	2778
85°	2768

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 21708 cd/sqm

TEST NUMBER: P1287319

CATALOG NUMBER: P3AS13R659030D2WDE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	132.3	9.9
10°-20°	365.5	27.4
20°-30°	478.5	35.9
30°-40°	277.1	20.8
40°-50°	59.3	4.5
50°-60°	9.6	0.7
60°-70°	5.3	0.4
70°-80°	3.1	0.2
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	976.3	73.3
0°-40°	1253.4	94.1
0°-60°	1322.4	99.3
0°-90°	1332.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1332.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1484	
5°	1392	132
15°	1309	366
25°	1076	478
35°	437	277
45°	70	59
55°	9	10
65°	5	5
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1287319

CATALOG NUMBER: P3AS13R659030D2WDE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	1484.5
2.5°	1442.4
5°	1391.8
7.5°	1371.3
10°	1358.4
12.5°	1340.1
15°	1308.9
17.5°	1260.4
20°	1202.2
22.5°	1147.3
25°	1076.2
27.5°	956.6
30°	799.3
32.5°	619.4
35°	437.4
37.5°	276.9
40°	164.8
42.5°	103.4
45°	70.0
47.5°	45.2
50°	24.8
52.5°	11.8
55°	8.6
57.5°	7.5
60°	6.5
62.5°	6.5
65°	5.4
67.5°	4.3
70°	4.3
72.5°	3.2
75°	3.2
77.5°	2.2
80°	2.2
82.5°	1.1
85°	1.1
87.5°	1.1
90°	0.0

(END OF REPORT)