

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287464

Luminaire Tested: P3AS17R309030D2WDE010 E3CB1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287464
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R309030D2WDE010 E3CB1MW
Description: 3in Adjustable Dim to Warm LED luminaire with, R30 optic, 3000K CCT AND, 90CRI , E3CB1M
TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1833.0 lumens
Efficiency: N/A
Efficacy: 67.1 lumens/watt
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287464

CATALOG NUMBER: P3AS17R309030D2WDE010 E3CB1MW

Luminous Intensity Polar Plot

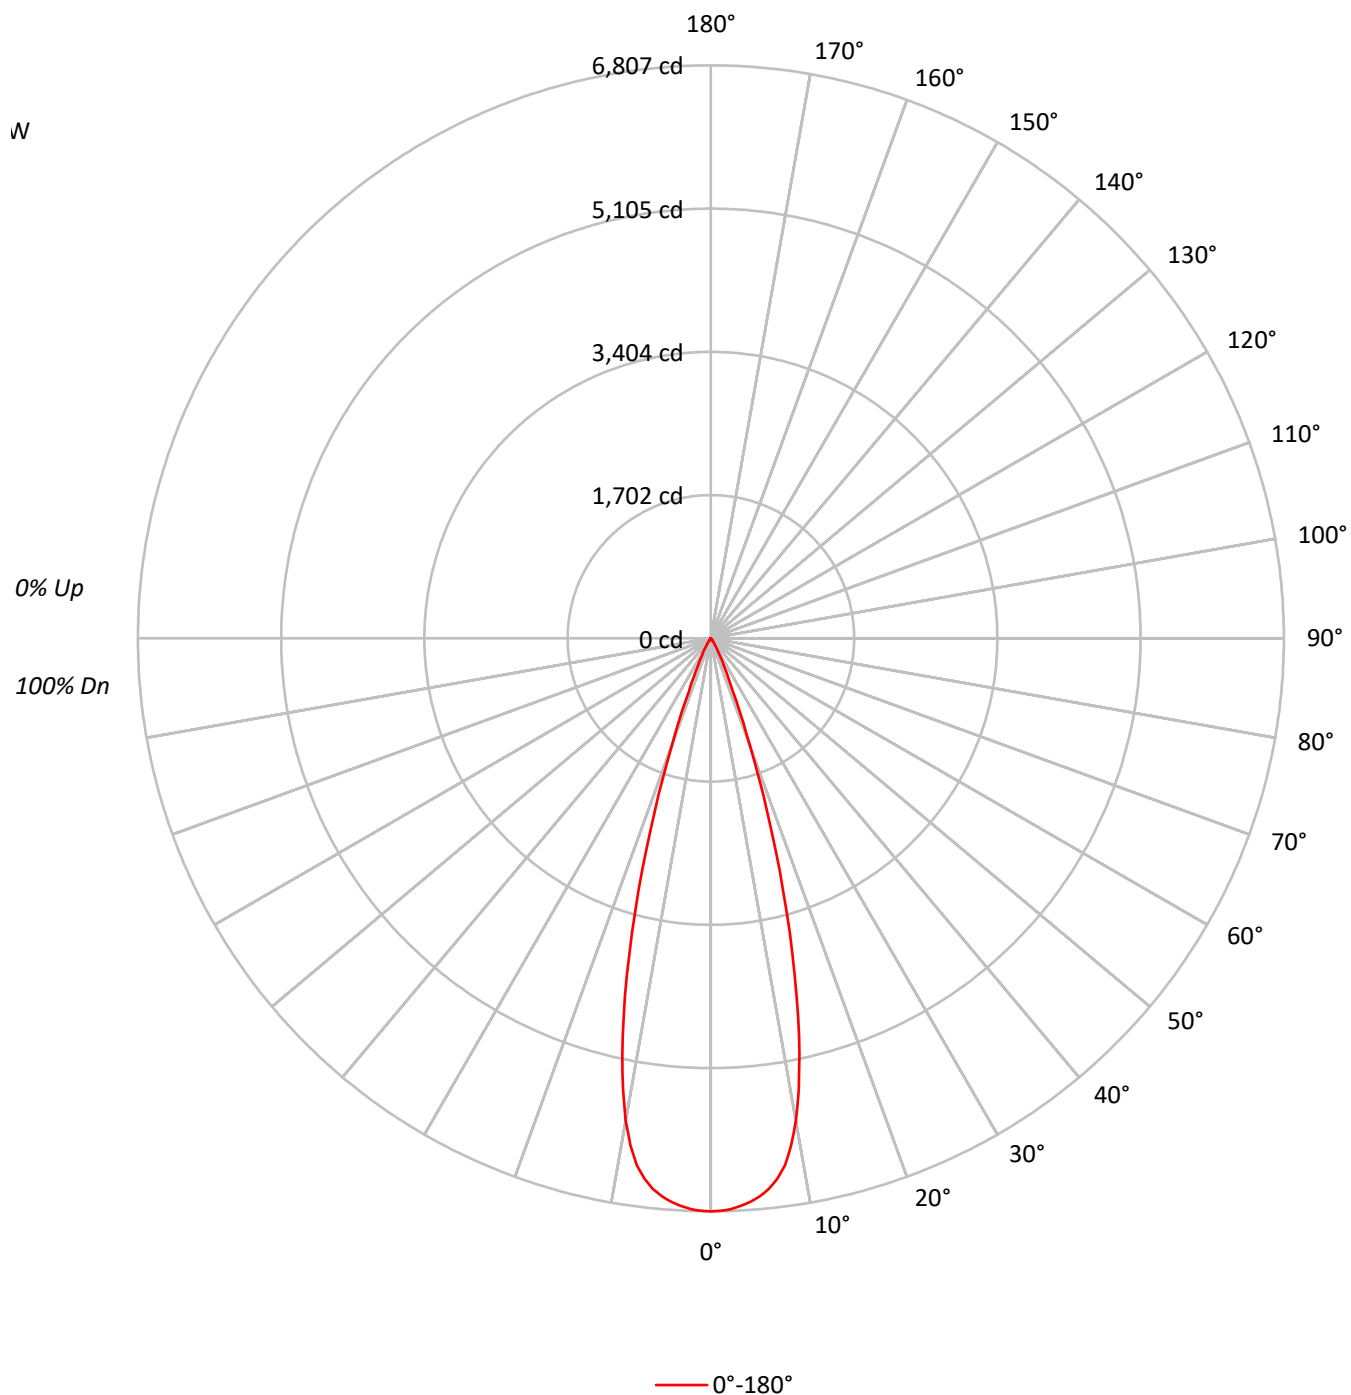

TEST NUMBER: P1287464

CATALOG NUMBER: P3AS17R309030D2WDE010 E3CB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	109		113	111	109	108		107	106	104		103	102	101		100	99	98
2	111	108	105	102		109	106	104	101		103	101	99		100	99	97		98	96	95
3	108	103	100	97		106	102	99	96		100	97	95		97	95	93		95	94	92
4	105	100	96	93		103	99	95	92		97	94	91		95	92	90		93	91	89
5	102	96	92	89		100	95	91	89		94	90	88		92	89	87		91	88	87
6	99	93	89	86		98	92	88	86		91	88	85		90	87	85		89	86	84
7	96	90	86	83		95	89	86	83		88	85	82		87	84	82		86	84	82
8	94	87	83	81		93	87	83	80		86	83	80		85	82	80		84	82	80
9	91	85	81	78		90	84	81	78		84	80	78		83	80	78		82	79	77
10	89	83	79	76		88	82	78	76		82	78	76		81	78	76		80	77	75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1492687
5°	1464469
10°	1296436
15°	821367
20°	311784
25°	92304
30°	36461
35°	11190
40°	4952
45°	1799
50°	1467
55°	1109
60°	1272
65°	1505
70°	898
75°	1186
80°	1768
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1799 cd/sqm

TEST NUMBER: P1287464

CATALOG NUMBER: P3AS17R309030D2WDE010 E3CB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	611.6	33.4
10°-20°	953.2	52.0
20°-30°	221.3	12.1
30°-40°	34.3	1.9
40°-50°	5.9	0.3
50°-60°	2.8	0.2
60°-70°	2.3	0.1
70°-80°	1.5	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1786.1	97.4
0°-40°	1820.4	99.3
0°-60°	1829.0	99.8
0°-90°	1833.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1833.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6807	
5°	6653	612
15°	3618	953
25°	382	221
35°	42	34
45°	6	6
55°	3	3
65°	3	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1287464

CATALOG NUMBER: P3AS17R309030D2WDE010 E3CB1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	6807.2
1°	6802.8
2°	6784.1
3°	6752.5
4°	6712.1
5°	6653.1
6°	6579.7
7°	6470.3
8°	6320.5
9°	6100.2
10°	5822.4
11°	5463.9
12°	5059.3
13°	4610.1
14°	4116.3
15°	3618.1
17.5°	2367.0
20°	1336.1
22.5°	682.4
25°	381.5
27.5°	234.7
30°	144.0
32.5°	77.7
35°	41.8
37.5°	27.4
40°	17.3
42.5°	10.1
45°	5.8
47.5°	4.3
50°	4.3
52.5°	2.9
55°	2.9
57.5°	2.9
60°	2.9
62.5°	2.9
65°	2.9
67.5°	1.4
70°	1.4
72.5°	1.4
75°	1.4
77.5°	1.4
80°	1.4
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1287464

CATALOG NUMBER: P3AS17R309030D2WDE010 E3CB1MW

CANDELA DISTRIBUTION (continued):



(END OF REPORT)