

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287466

Luminaire Tested: P3AS17R309030D2WDE010 E3CD1MMS

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1287466  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-16)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R309030D2WDE010 E3CD1MMS  
Description: 3in Adjustable Dim to Warm LED luminaire with, R30 optic, 3000K CCT AND, 90CRI ,  
E3CD1MMS TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1833.0 lumens  
Efficiency: N/A  
Efficacy: 67.1 lumens/watt  
Spacing Criteria (0/90/45): 0.53 / 0.53 / 0.47  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 27.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1287466

CATALOG NUMBER: P3AS17R309030D2WDE010 E3CD1MMS

### Luminous Intensity Polar Plot

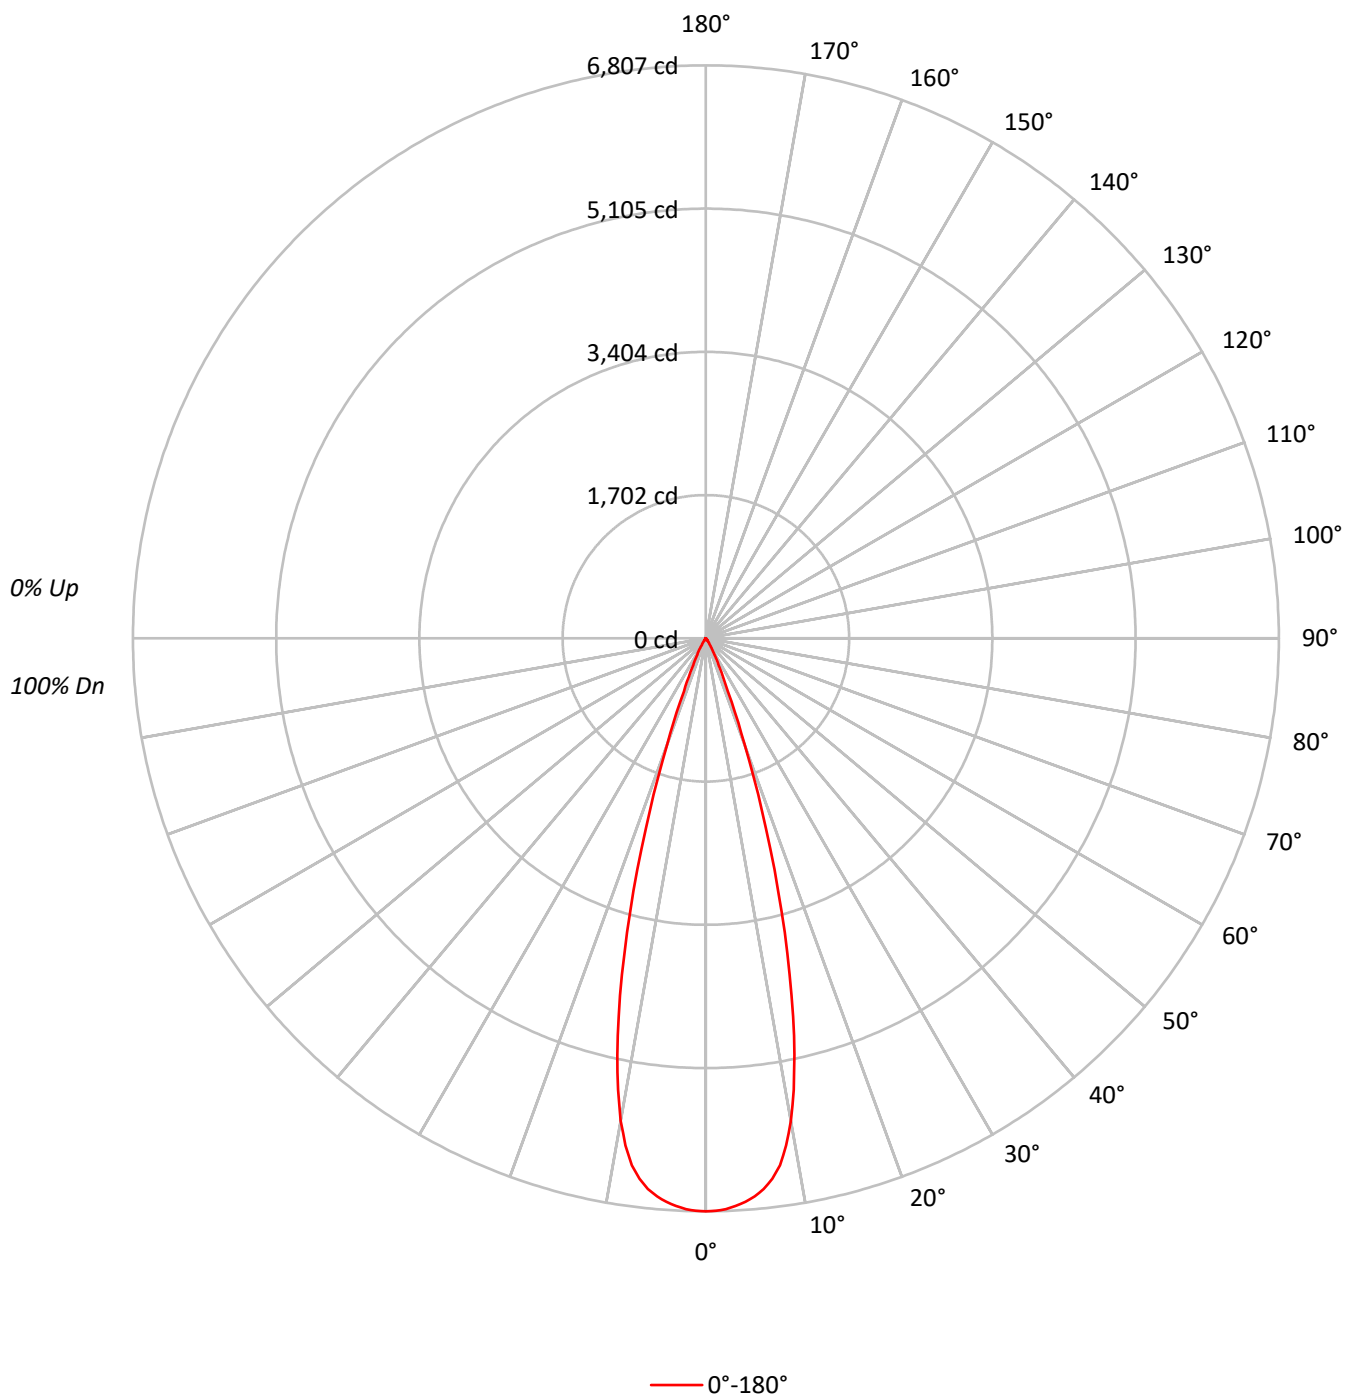

TEST NUMBER: P1287466

CATALOG NUMBER: P3AS17R309030D2WDE010 E3CD1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 115 | 113 | 111 | 109 | 113 | 111 | 109 | 108 | 107 | 106 | 104 |  | 103 | 102 | 101 |  | 100 |
| 2   | 111 | 108 | 105 | 102 | 109 | 106 | 104 | 101 | 103 | 101 | 99  |  | 100 | 99  | 97  |  | 98  |
| 3   | 108 | 103 | 100 | 97  | 106 | 102 | 99  | 96  | 100 | 97  | 95  |  | 97  | 95  | 93  |  | 95  |
| 4   | 105 | 100 | 96  | 93  | 103 | 99  | 95  | 92  | 97  | 94  | 91  |  | 95  | 92  | 90  |  | 93  |
| 5   | 102 | 96  | 92  | 89  | 100 | 95  | 91  | 89  | 94  | 90  | 88  |  | 92  | 89  | 87  |  | 91  |
| 6   | 99  | 93  | 89  | 86  | 98  | 92  | 88  | 86  | 91  | 88  | 85  |  | 90  | 87  | 85  |  | 89  |
| 7   | 96  | 90  | 86  | 83  | 95  | 89  | 86  | 83  | 88  | 85  | 82  |  | 87  | 84  | 82  |  | 86  |
| 8   | 94  | 87  | 83  | 81  | 93  | 87  | 83  | 80  | 86  | 83  | 80  |  | 85  | 82  | 80  |  | 84  |
| 9   | 91  | 85  | 81  | 78  | 90  | 84  | 81  | 78  | 84  | 80  | 78  |  | 83  | 80  | 78  |  | 82  |
| 10  | 89  | 83  | 79  | 76  | 88  | 82  | 78  | 76  | 82  | 78  | 76  |  | 81  | 78  | 76  |  | 80  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 1492687 |
| 5°  | 1464469 |
| 10° | 1296436 |
| 15° | 821367  |
| 20° | 311784  |
| 25° | 92304   |
| 30° | 36461   |
| 35° | 11190   |
| 40° | 4952    |
| 45° | 1799    |
| 50° | 1467    |
| 55° | 1109    |
| 60° | 1272    |
| 65° | 1505    |
| 70° | 898     |
| 75° | 1186    |
| 80° | 1768    |
| 85° | 0       |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 1799 cd/sqm

TEST NUMBER: P1287466

CATALOG NUMBER: P3AS17R309030D2WDE010 E3CD1MMS

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 611.6  | 33.4      |
| 10°-20°   | 953.2  | 52.0      |
| 20°-30°   | 221.3  | 12.1      |
| 30°-40°   | 34.3   | 1.9       |
| 40°-50°   | 5.9    | 0.3       |
| 50°-60°   | 2.8    | 0.2       |
| 60°-70°   | 2.3    | 0.1       |
| 70°-80°   | 1.5    | 0.1       |
| 80°-90°   | 0.2    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 1786.1 | 97.4      |
| 0°-40°    | 1820.4 | 99.3      |
| 0°-60°    | 1829.0 | 99.8      |
| 0°-90°    | 1833.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1833.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 6807 |      |
| 5°  | 6653 | 612  |
| 15° | 3618 | 953  |
| 25° | 382  | 221  |
| 35° | 42   | 34   |
| 45° | 6    | 6    |
| 55° | 3    | 3    |
| 65° | 3    | 2    |
| 75° | 1    | 1    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1287466

CATALOG NUMBER: P3AS17R309030D2WDE010 E3CD1MMS

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 6807.2 |
| 1°    | 6802.8 |
| 2°    | 6784.1 |
| 3°    | 6752.5 |
| 4°    | 6712.1 |
| 5°    | 6653.1 |
| 6°    | 6579.7 |
| 7°    | 6470.3 |
| 8°    | 6320.5 |
| 9°    | 6100.2 |
| 10°   | 5822.4 |
| 11°   | 5463.9 |
| 12°   | 5059.3 |
| 13°   | 4610.1 |
| 14°   | 4116.3 |
| 15°   | 3618.1 |
| 17.5° | 2367.0 |
| 20°   | 1336.1 |
| 22.5° | 682.4  |
| 25°   | 381.5  |
| 27.5° | 234.7  |
| 30°   | 144.0  |
| 32.5° | 77.7   |
| 35°   | 41.8   |
| 37.5° | 27.4   |
| 40°   | 17.3   |
| 42.5° | 10.1   |
| 45°   | 5.8    |
| 47.5° | 4.3    |
| 50°   | 4.3    |
| 52.5° | 2.9    |
| 55°   | 2.9    |
| 57.5° | 2.9    |
| 60°   | 2.9    |
| 62.5° | 2.9    |
| 65°   | 2.9    |
| 67.5° | 1.4    |
| 70°   | 1.4    |
| 72.5° | 1.4    |
| 75°   | 1.4    |
| 77.5° | 1.4    |
| 80°   | 1.4    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |



TEST NUMBER: P1287466

CATALOG NUMBER: P3AS17R309030D2WDE010 E3CD1MMS

CANDELA DISTRIBUTION (continued):



(END OF REPORT)