

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287518

Luminaire Tested: P3AS17R359030D2WDE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287518
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R359030D2WDE010 E3DLP1WMH
Description: 3in Adjustable Dim to Warm LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,
E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 934.0 lumens
Efficiency: N/A
Efficacy: 34.2 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287518

CATALOG NUMBER: P3AS17R359030D2WDE010 E3DLP1WMH

Luminous Intensity Polar Plot

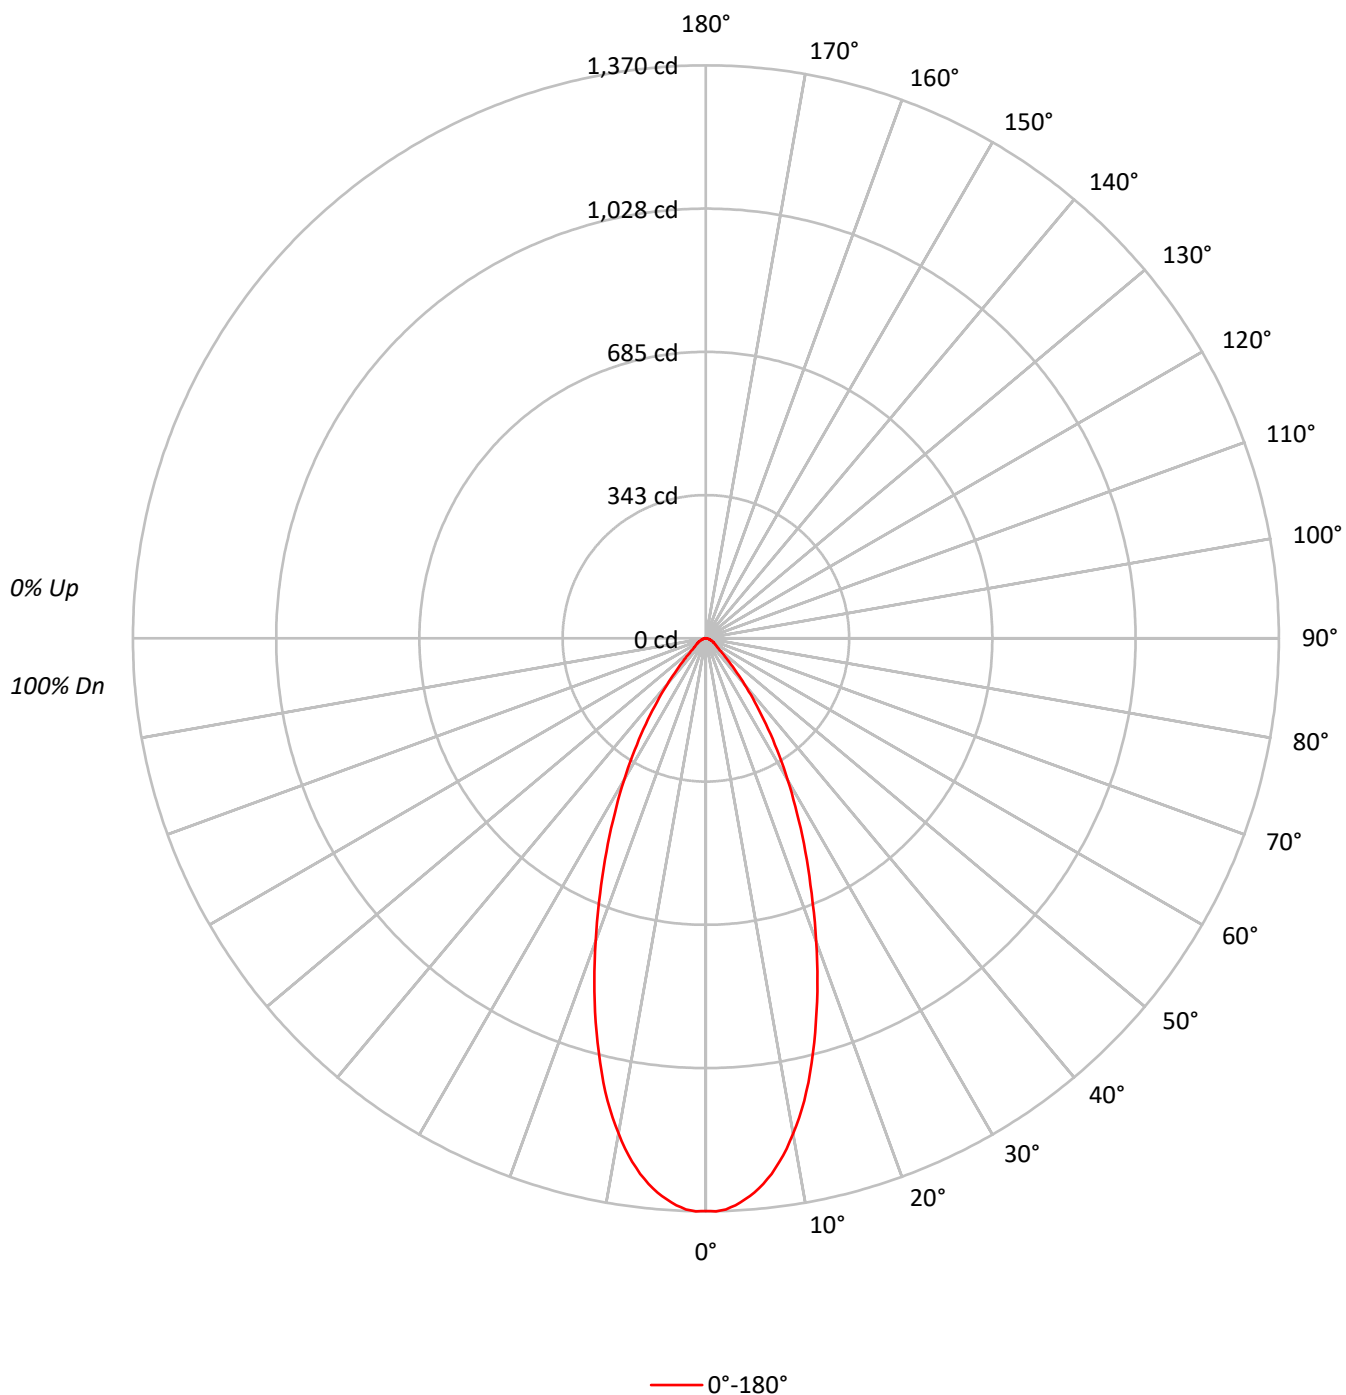

TEST NUMBER: P1287518

CATALOG NUMBER: P3AS17R359030D2WDE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91
3	102	95	90	86	100	94	89	85	91	87	84		89	85	82		86
4	97	89	83	79	95	88	82	78	86	81	77		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	77	72	68	76	71	67		75	70	67		73
7	83	74	68	63	82	73	67	63	72	67	63		71	66	63		69
8	79	70	64	60	78	69	63	59	68	63	59		67	62	59		66
9	76	66	60	56	75	66	60	56	65	59	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	300217
5°	292823
10°	267708
15°	227220
20°	179869
25°	136048
30°	99053
35°	66977
40°	41163
45°	23630
50°	14226
55°	11546
60°	10087
65°	8976
70°	7373
75°	7286
80°	7324
85°	7296

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 23630 cd/sqm

TEST NUMBER: P1287518

CATALOG NUMBER: P3AS17R359030D2WDE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.9	13.2
10°-20°	275.9	29.5
20°-30°	258.1	27.6
30°-40°	158.0	16.9
40°-50°	62.3	6.7
50°-60°	27.4	2.9
60°-70°	17.1	1.8
70°-80°	9.1	1.0
80°-90°	3.1	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	657.0	70.3
0°-40°	815.0	87.3
0°-60°	904.7	96.9
0°-90°	934.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	934.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1369	
5°	1330	123
15°	1001	276
25°	562	258
35°	250	158
45°	76	62
55°	30	27
65°	17	17
75°	9	9
85°	3	3
90°	0	

TEST NUMBER: P1287518

CATALOG NUMBER: P3AS17R359030D2WDE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1369.1
1°	1370.5
2°	1366.2
3°	1357.6
4°	1344.6
5°	1330.3
6°	1311.6
7°	1290.0
8°	1264.1
9°	1235.3
10°	1202.3
11°	1167.7
12°	1130.4
13°	1090.1
14°	1045.5
15°	1000.9
17.5°	885.9
20°	770.8
22.5°	660.1
25°	562.3
27.5°	471.7
30°	391.2
32.5°	316.4
35°	250.2
37.5°	191.3
40°	143.8
42.5°	103.5
45°	76.2
47.5°	54.6
50°	41.7
52.5°	34.5
55°	30.2
57.5°	25.9
60°	23.0
62.5°	20.1
65°	17.3
67.5°	14.4
70°	11.5
72.5°	10.1
75°	8.6
77.5°	7.2
80°	5.8
82.5°	4.3
85°	2.9
87.5°	1.4



TEST NUMBER: P1287518

CATALOG NUMBER: P3AS17R359030D2WDE010 E3DLP1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)