

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287526

Luminaire Tested: P3AS17R409030D2WDE010 E3CD1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287526
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-24)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R409030D2WDE010 E3CD1MMS
Description: 3in Adjustable Dim to Warm LED luminaire with, R40 optic, 3000K CCT AND, 90CRI ,
E3CD1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2022.9 lumens
Efficiency: N/A
Efficacy: 74.1 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.59
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287526

CATALOG NUMBER: P3AS17R409030D2WDE010 E3CD1MMS

Luminous Intensity Polar Plot

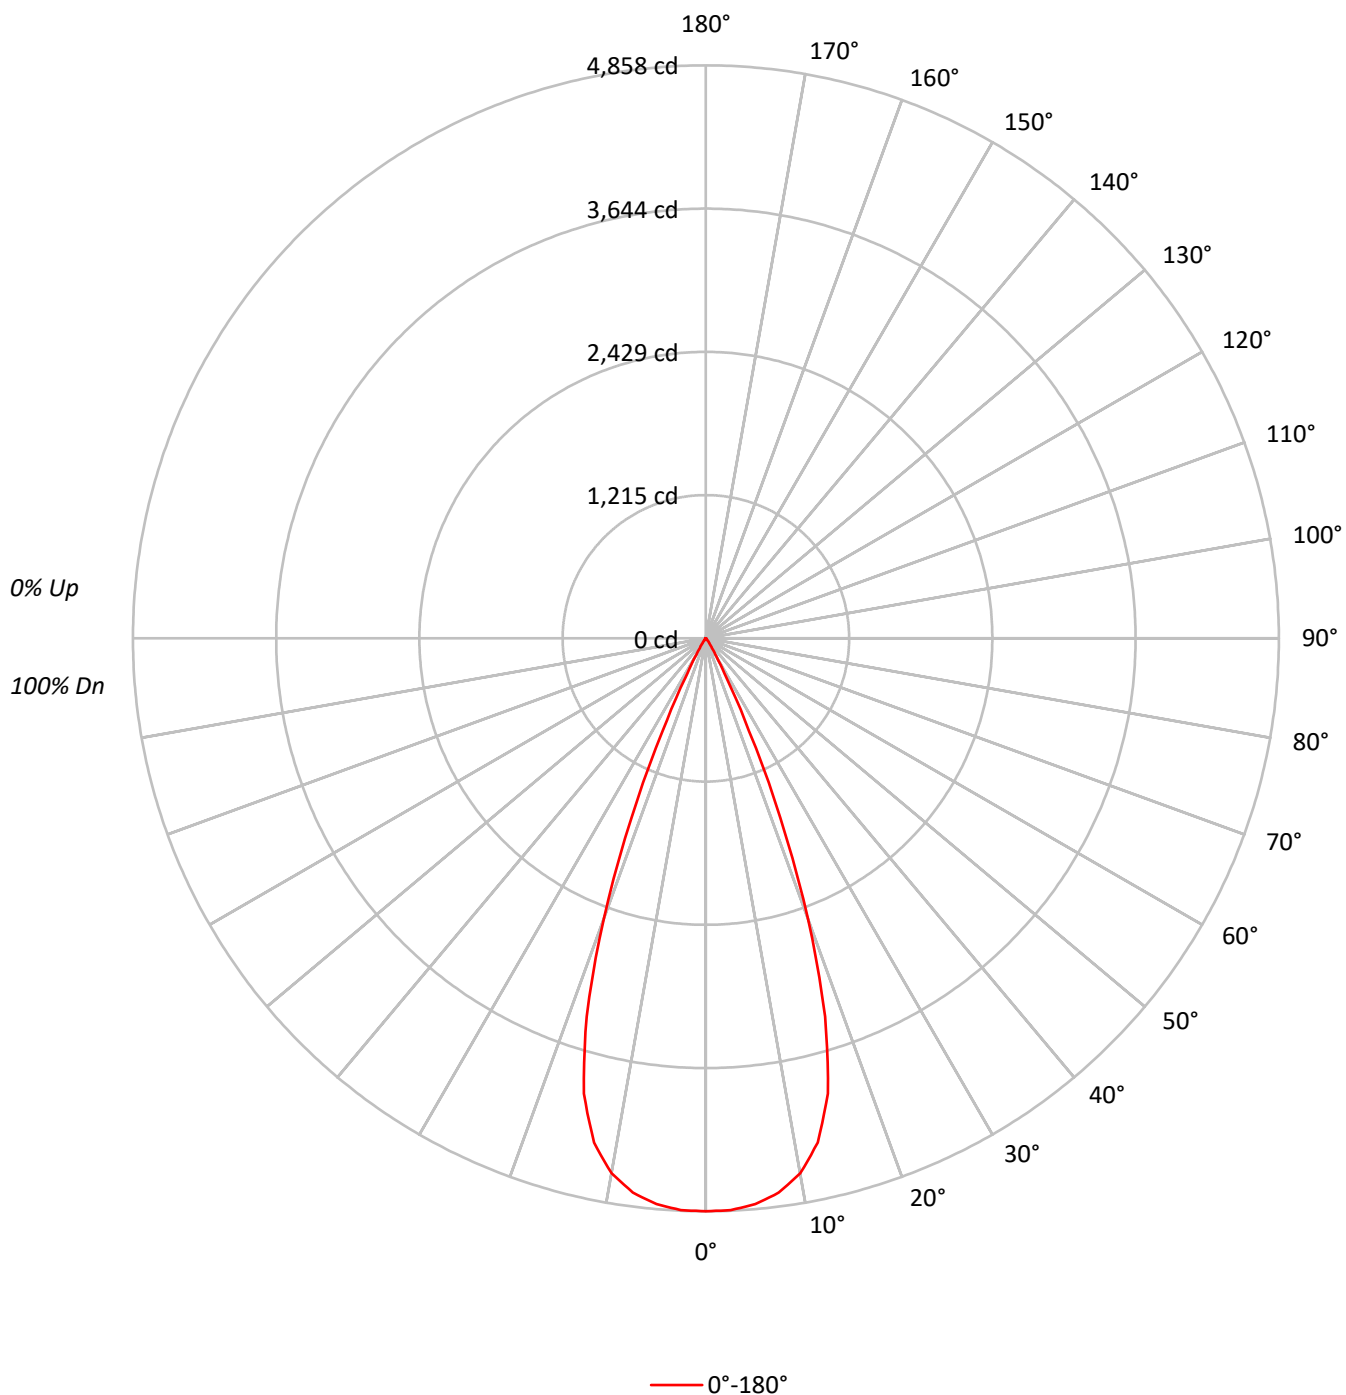

TEST NUMBER: P1287526

CATALOG NUMBER: P3AS17R409030D2WDE010 E3CD1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	115	112	110	109	112	110	109	107	106	105	104		103	102	101		99	98	98	96
2	111	107	104	101	109	105	102	100	102	100	98		99	97	96		96	95	94	92
3	107	102	98	95	105	100	97	94	98	95	93		96	93	91		94	92	90	89
4	103	97	93	90	102	96	92	89	94	91	88		92	90	87		91	88	86	85
5	100	93	89	86	98	92	88	85	91	87	85		89	86	84		88	85	83	82
6	96	90	85	82	95	89	85	82	88	84	81		86	83	81		85	82	80	79
7	93	86	82	79	92	86	81	78	85	81	78		83	80	78		82	79	77	76
8	90	83	79	76	89	83	78	75	82	78	75		81	77	75		80	77	75	73
9	87	80	76	73	87	80	76	73	79	75	72		78	75	72		77	74	72	71
10	85	77	73	70	84	77	73	70	76	73	70		76	72	70		75	72	70	69

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1065156
5°	1060046
10°	1025499
15°	907292
20°	591948
25°	209698
30°	44463
35°	14643
40°	5353
45°	1799
50°	1467
55°	1644
60°	1272
65°	1505
70°	898
75°	1186
80°	1768
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 82.5°

Luminance: 2352 cd/sqm

TEST NUMBER: P1287526

CATALOG NUMBER: P3AS17R409030D2WDE010 E3CD1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	453.1	22.4
10°-20°	1055.3	52.2
20°-30°	457.9	22.6
30°-40°	42.2	2.1
40°-50°	6.0	0.3
50°-60°	3.7	0.2
60°-70°	2.7	0.1
70°-80°	1.5	0.1
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1966.3	97.2
0°-40°	2008.5	99.3
0°-60°	2018.2	99.8
0°-90°	2022.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2022.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4858	
5°	4816	453
15°	3997	1055
25°	867	458
35°	55	42
45°	6	6
55°	4	4
65°	3	3
75°	1	1
85°	0	1
90°	0	

TEST NUMBER: P1287526

CATALOG NUMBER: P3AS17R409030D2WDE010 E3CD1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	4857.5
2.5°	4851.8
5°	4815.8
7.5°	4739.5
10°	4605.6
12.5°	4379.5
15°	3996.6
17.5°	3361.7
20°	2536.7
22.5°	1647.0
25°	866.7
27.5°	372.9
30°	175.6
32.5°	95.0
35°	54.7
37.5°	33.1
40°	18.7
42.5°	10.1
45°	5.8
47.5°	4.3
50°	4.3
52.5°	4.3
55°	4.3
57.5°	4.3
60°	2.9
62.5°	2.9
65°	2.9
67.5°	2.9
70°	1.4
72.5°	1.4
75°	1.4
77.5°	1.4
80°	1.4
82.5°	1.4
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)