

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287643

Luminaire Tested: P3AS17R609030D2WDE010 E3D1WH

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1287643  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R609030D2WDE010 E3D1WH  
Description: 3in Adjustable Dim to Warm LED luminaire with, R60 optic, 3000K CCT AND, 90CRI , E3D1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1726.0 lumens  
Efficiency: N/A  
Efficacy: 63.2 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.88  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 27.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1287643

CATALOG NUMBER: P3AS17R609030D2WDE010 E3D1WH

### Luminous Intensity Polar Plot

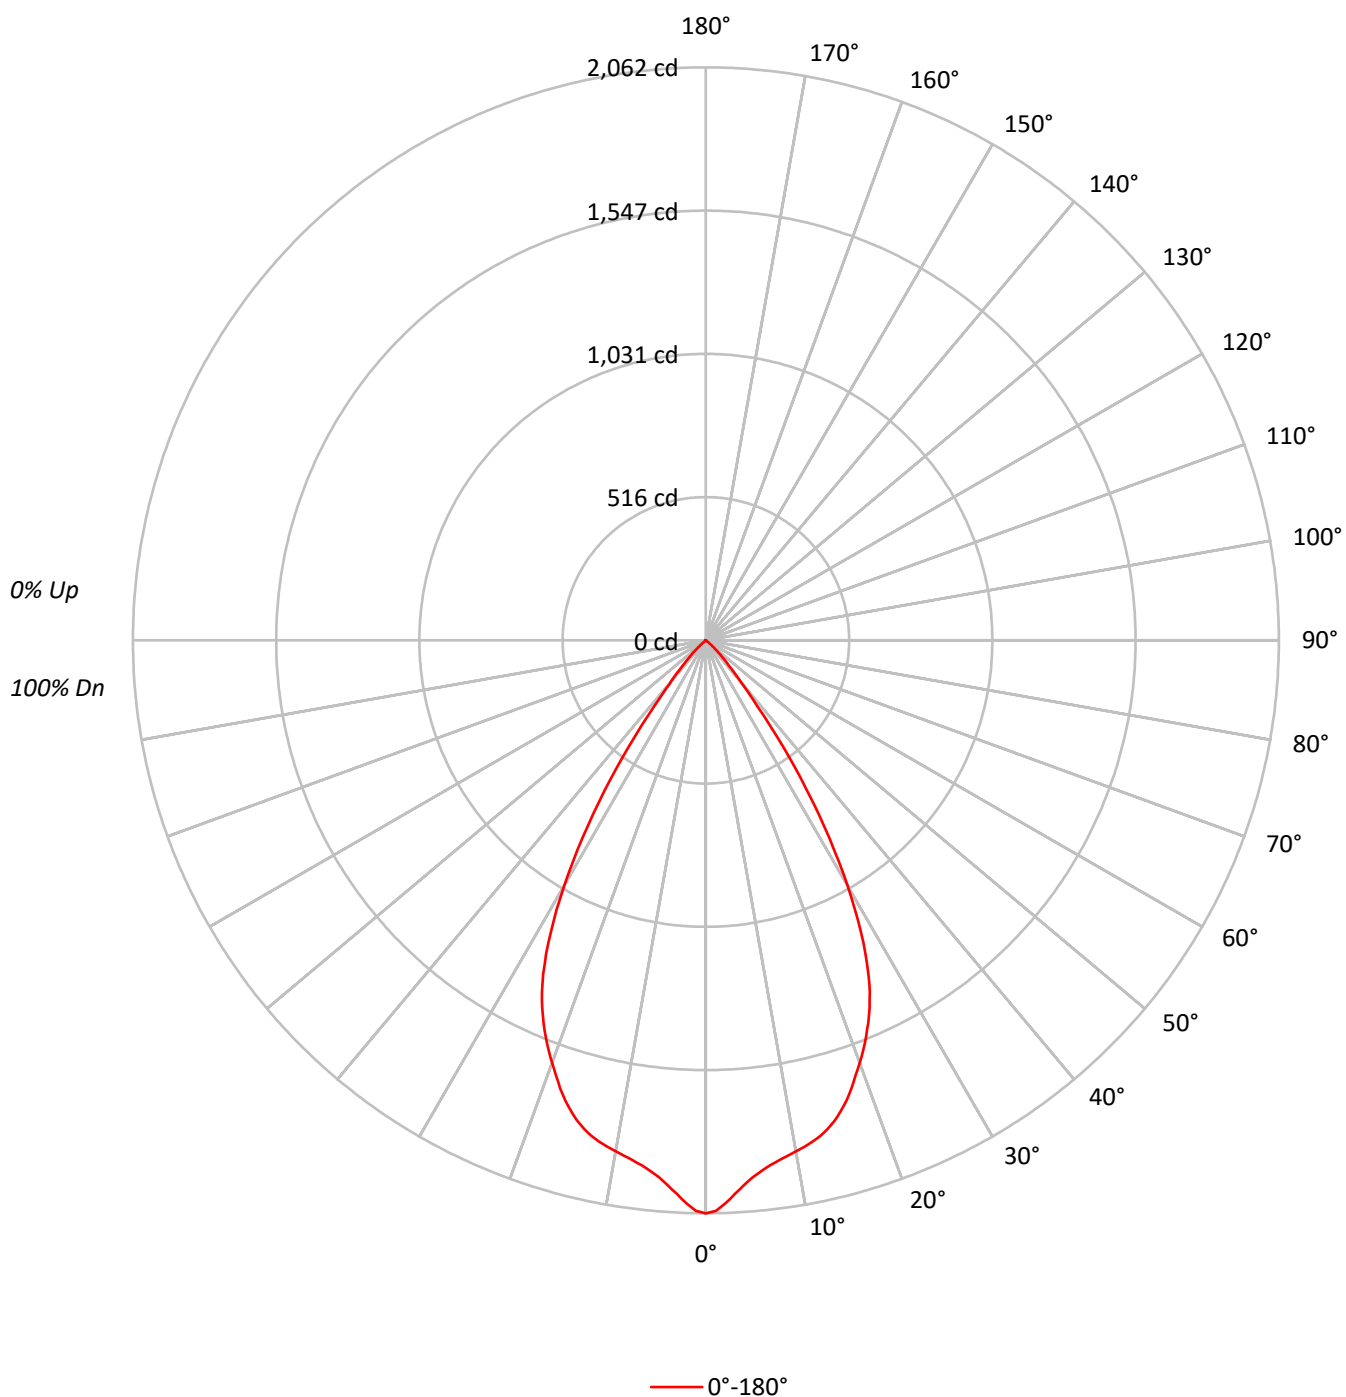

TEST NUMBER: P1287643

CATALOG NUMBER: P3AS17R609030D2WDE010 E3D1WH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 114 | 111 | 109 | 106 | 111 | 109 | 107 | 105 | 105 | 103 | 102 |  | 101 | 100 | 99  |  | 98  |
| 2   | 108 | 104 | 100 | 96  | 106 | 102 | 98  | 95  | 99  | 96  | 93  |  | 96  | 93  | 91  |  | 93  |
| 3   | 103 | 97  | 92  | 88  | 101 | 96  | 91  | 88  | 93  | 89  | 86  |  | 91  | 87  | 85  |  | 88  |
| 4   | 98  | 91  | 85  | 81  | 96  | 90  | 85  | 81  | 88  | 83  | 80  |  | 86  | 82  | 79  |  | 84  |
| 5   | 93  | 85  | 80  | 75  | 92  | 84  | 79  | 75  | 83  | 78  | 74  |  | 81  | 77  | 74  |  | 79  |
| 6   | 89  | 80  | 74  | 70  | 87  | 79  | 74  | 70  | 78  | 73  | 70  |  | 77  | 72  | 69  |  | 75  |
| 7   | 85  | 76  | 70  | 66  | 83  | 75  | 69  | 65  | 74  | 69  | 65  |  | 72  | 68  | 65  |  | 71  |
| 8   | 81  | 71  | 65  | 61  | 79  | 71  | 65  | 61  | 70  | 65  | 61  |  | 69  | 64  | 61  |  | 68  |
| 9   | 77  | 67  | 62  | 58  | 76  | 67  | 61  | 58  | 66  | 61  | 57  |  | 65  | 61  | 57  |  | 64  |
| 10  | 73  | 64  | 58  | 54  | 72  | 63  | 58  | 54  | 63  | 58  | 54  |  | 62  | 57  | 54  |  | 61  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 452244 |
| 5°  | 426919 |
| 10° | 415824 |
| 15° | 406313 |
| 20° | 377800 |
| 25° | 337737 |
| 30° | 257964 |
| 35° | 148944 |
| 40° | 57794  |
| 45° | 24096  |
| 50° | 5288   |
| 55° | 803    |
| 60° | 614    |
| 65° | 363    |
| 70° | 449    |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 24096 cd/sqm

TEST NUMBER: P1287643

CATALOG NUMBER: P3AS17R609030D2WDE010 E3D1WH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 183.1  | 10.6      |
| 10°-20°   | 498.6  | 28.9      |
| 20°-30°   | 624.4  | 36.2      |
| 30°-40°   | 349.1  | 20.2      |
| 40°-50°   | 66.4   | 3.8       |
| 50°-60°   | 3.4    | 0.2       |
| 60°-70°   | 0.8    | 0.0       |
| 70°-80°   | 0.3    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 1306.1 | 75.7      |
| 0°-40°    | 1655.2 | 95.9      |
| 0°-60°    | 1724.9 | 99.9      |
| 0°-90°    | 1726.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1726.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 2062 |      |
| 5°  | 1940 | 183  |
| 15° | 1790 | 499  |
| 25° | 1396 | 624  |
| 35° | 556  | 349  |
| 45° | 78   | 66   |
| 55° | 2    | 3    |
| 65° | 1    | 1    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1287643

CATALOG NUMBER: P3AS17R609030D2WDE010 E3D1WH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 2062.4 |
| 1°    | 2053.9 |
| 2°    | 2027.1 |
| 3°    | 1995.3 |
| 4°    | 1965.6 |
| 5°    | 1939.5 |
| 6°    | 1919.7 |
| 7°    | 1902.8 |
| 8°    | 1890.1 |
| 9°    | 1878.1 |
| 10°   | 1867.5 |
| 11°   | 1856.9 |
| 12°   | 1844.9 |
| 13°   | 1830.1 |
| 14°   | 1812.4 |
| 15°   | 1789.8 |
| 16°   | 1762.3 |
| 17°   | 1731.2 |
| 18°   | 1695.9 |
| 19°   | 1655.7 |
| 20°   | 1619.0 |
| 21°   | 1579.4 |
| 22°   | 1538.5 |
| 23°   | 1495.4 |
| 24°   | 1448.1 |
| 25°   | 1395.9 |
| 26°   | 1334.4 |
| 27°   | 1265.9 |
| 28°   | 1189.0 |
| 29°   | 1107.1 |
| 30°   | 1018.8 |
| 31°   | 929.9  |
| 32°   | 838.1  |
| 32.5° | 787.9  |
| 33°   | 742.8  |
| 34°   | 648.9  |
| 35°   | 556.4  |
| 36°   | 473.1  |
| 37°   | 384.8  |
| 37.5° | 344.6  |
| 38°   | 305.0  |
| 39°   | 245.7  |
| 40°   | 201.9  |
| 42.5° | 122.9  |
| 45°   | 77.7   |

TEST NUMBER: P1287643

CATALOG NUMBER: P3AS17R609030D2WDE010 E3D1WH

**CANDELA DISTRIBUTION (continued):**

|       | 0°   |
|-------|------|
| 47.5° | 43.1 |
| 50°   | 15.5 |
| 52.5° | 3.5  |
| 55°   | 2.1  |
| 57.5° | 1.4  |
| 60°   | 1.4  |
| 62.5° | 0.7  |
| 65°   | 0.7  |
| 67.5° | 0.7  |
| 70°   | 0.7  |
| 72.5° | 0.7  |
| 75°   | 0.0  |
| 77.5° | 0.0  |
| 80°   | 0.0  |
| 82.5° | 0.0  |
| 85°   | 0.0  |
| 87.5° | 0.0  |
| 90°   | 0.0  |

(END OF REPORT)