

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287665

Luminaire Tested: P3AS17R659030D2WDE010 E3CB1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1287665
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-44)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R659030D2WDE010 E3CB1MW
Description: 3in Adjustable Dim to Warm LED luminaire with, R65 optic, 3000K CCT AND, 90CRI , E3CB1M
TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1781.0 lumens
Efficiency: N/A
Efficacy: 65.2 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.9
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 27.3
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1287665

CATALOG NUMBER: P3AS17R659030D2WDE010 E3CB1MW

Luminous Intensity Polar Plot

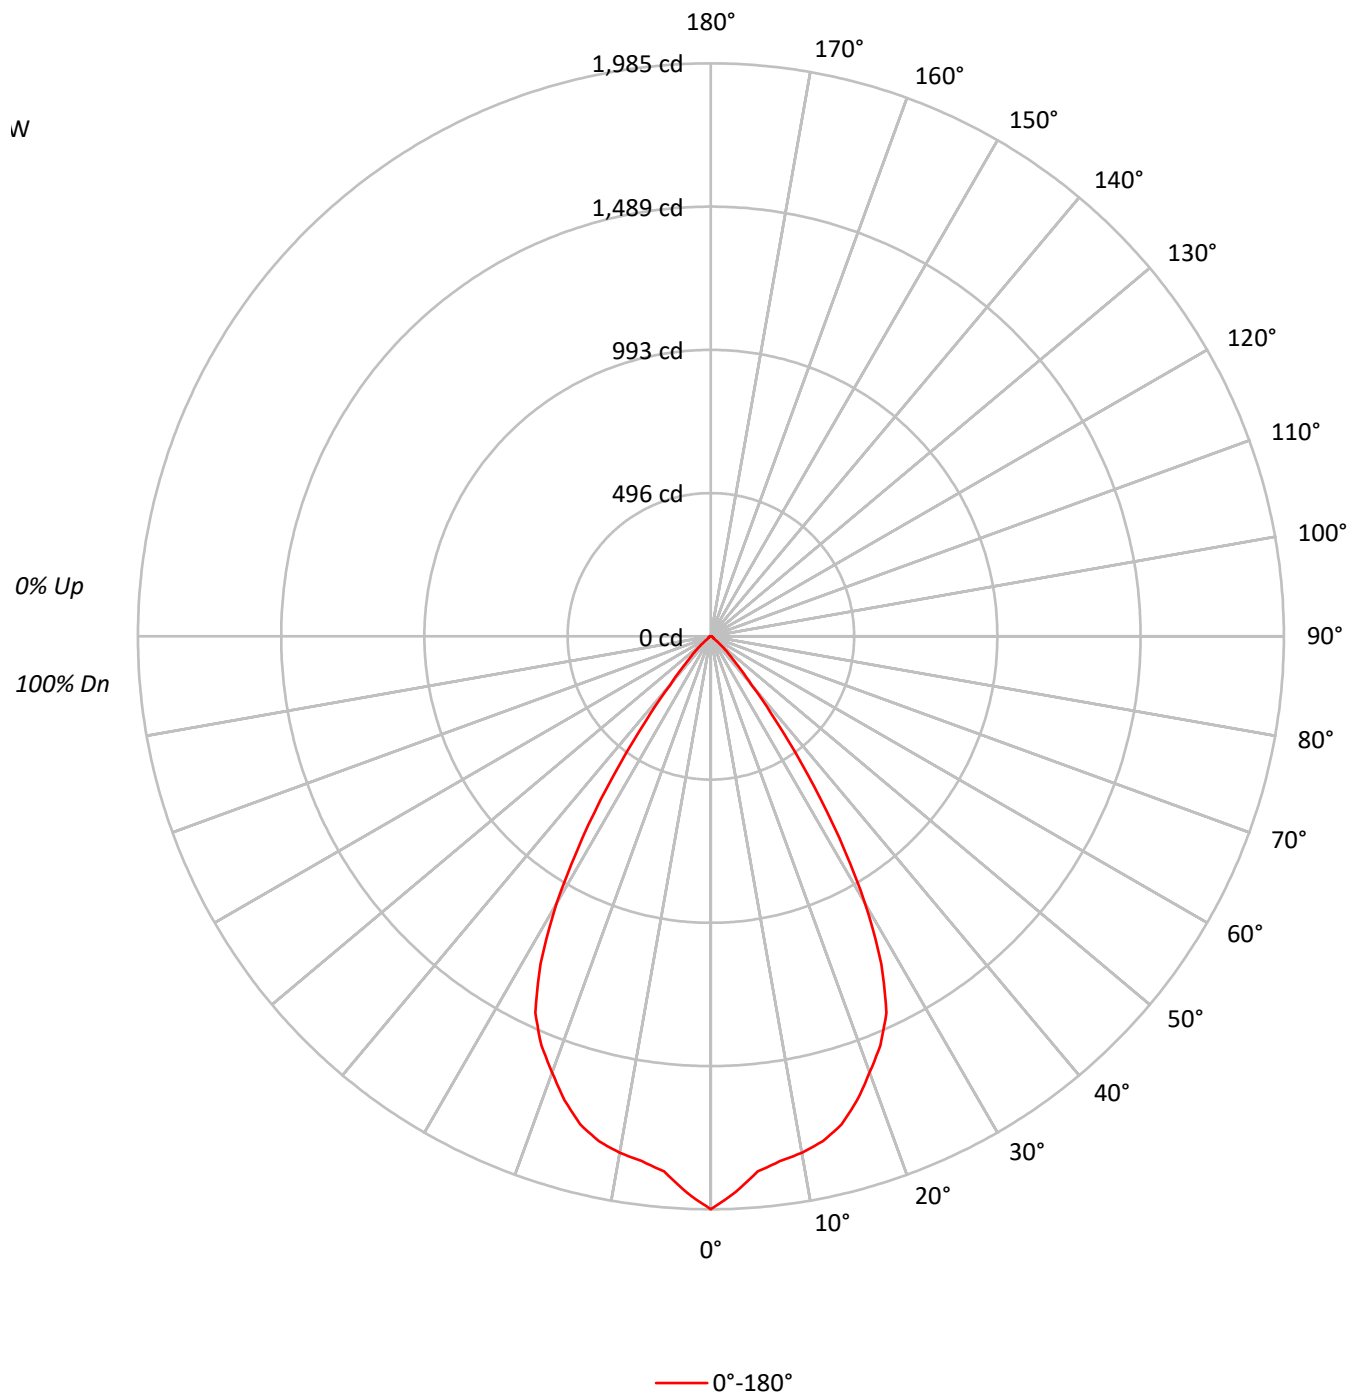

TEST NUMBER: P1287665

CATALOG NUMBER: P3AS17R659030D2WDE010 E3CB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	111	108	106		111	109	106	104		105	103	101		101	99	98		97	96	95
2	108	103	99	96		106	101	98	95		98	95	93		95	93	91		92	90	89
3	103	96	91	87		101	95	90	87		92	88	85		90	87	84		88	85	83
4	97	90	84	80		96	89	84	80		87	82	79		85	81	78		83	80	77
5	93	84	78	74		91	83	78	74		82	77	73		80	76	73		78	75	72
6	88	79	73	69		86	78	73	69		77	72	68		75	71	68		74	70	67
7	84	74	68	64		82	74	68	64		72	67	64		71	67	63		70	66	63
8	80	70	64	60		78	69	64	60		68	63	60		67	63	59		66	62	59
9	76	66	60	56		75	66	60	56		65	60	56		64	59	56		63	59	56
10	72	63	57	53		71	62	57	53		61	56	53		60	56	53		60	55	52

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	435228
5°	409640
10°	404424
15°	397301
20°	375116
25°	348141
30°	270624
35°	156546
40°	63090
45°	29026
50°	11292
55°	4396
60°	3772
65°	3736
70°	3719
75°	3643
80°	3662
85°	3522

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 29026 cd/sqm

TEST NUMBER: P1287665

CATALOG NUMBER: P3AS17R659030D2WDE010 E3CB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	176.9	9.9
10°-20°	488.7	27.4
20°-30°	639.7	35.9
30°-40°	370.6	20.8
40°-50°	79.3	4.5
50°-60°	12.9	0.7
60°-70°	7.1	0.4
70°-80°	4.2	0.2
80°-90°	1.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1305.4	73.3
0°-40°	1675.9	94.1
0°-60°	1768.1	99.3
0°-90°	1781.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1781.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1985	
5°	1861	177
15°	1750	489
25°	1439	640
35°	585	371
45°	94	79
55°	12	13
65°	7	7
75°	4	4
85°	1	2
90°	0	

TEST NUMBER: P1287665

CATALOG NUMBER: P3AS17R659030D2WDE010 E3CB1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	1984.8
2.5°	1928.7
5°	1861.0
7.5°	1833.6
10°	1816.3
12.5°	1791.8
15°	1750.1
17.5°	1685.2
20°	1607.5
22.5°	1534.0
25°	1438.9
27.5°	1279.1
30°	1068.8
32.5°	828.2
35°	584.8
37.5°	370.2
40°	220.4
42.5°	138.3
45°	93.6
47.5°	60.5
50°	33.1
52.5°	15.8
55°	11.5
57.5°	10.1
60°	8.6
62.5°	8.6
65°	7.2
67.5°	5.8
70°	5.8
72.5°	4.3
75°	4.3
77.5°	2.9
80°	2.9
82.5°	1.4
85°	1.4
87.5°	1.4
90°	0.0

(END OF REPORT)