

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1287667

Luminaire Tested: P3AS17R659030D2WDE010 E3CD1MMS

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1287667  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-44)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R659030D2WDE010 E3CD1MMS  
Description: 3in Adjustable Dim to Warm LED luminaire with, R65 optic, 3000K CCT AND, 90CRI ,  
E3CD1MMS TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1781.0 lumens  
Efficiency: N/A  
Efficacy: 65.2 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.9  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 27.3  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1287667  
CATALOG NUMBER: P3AS17R659030D2WDE010 E3CD1MMS

### Luminous Intensity Polar Plot

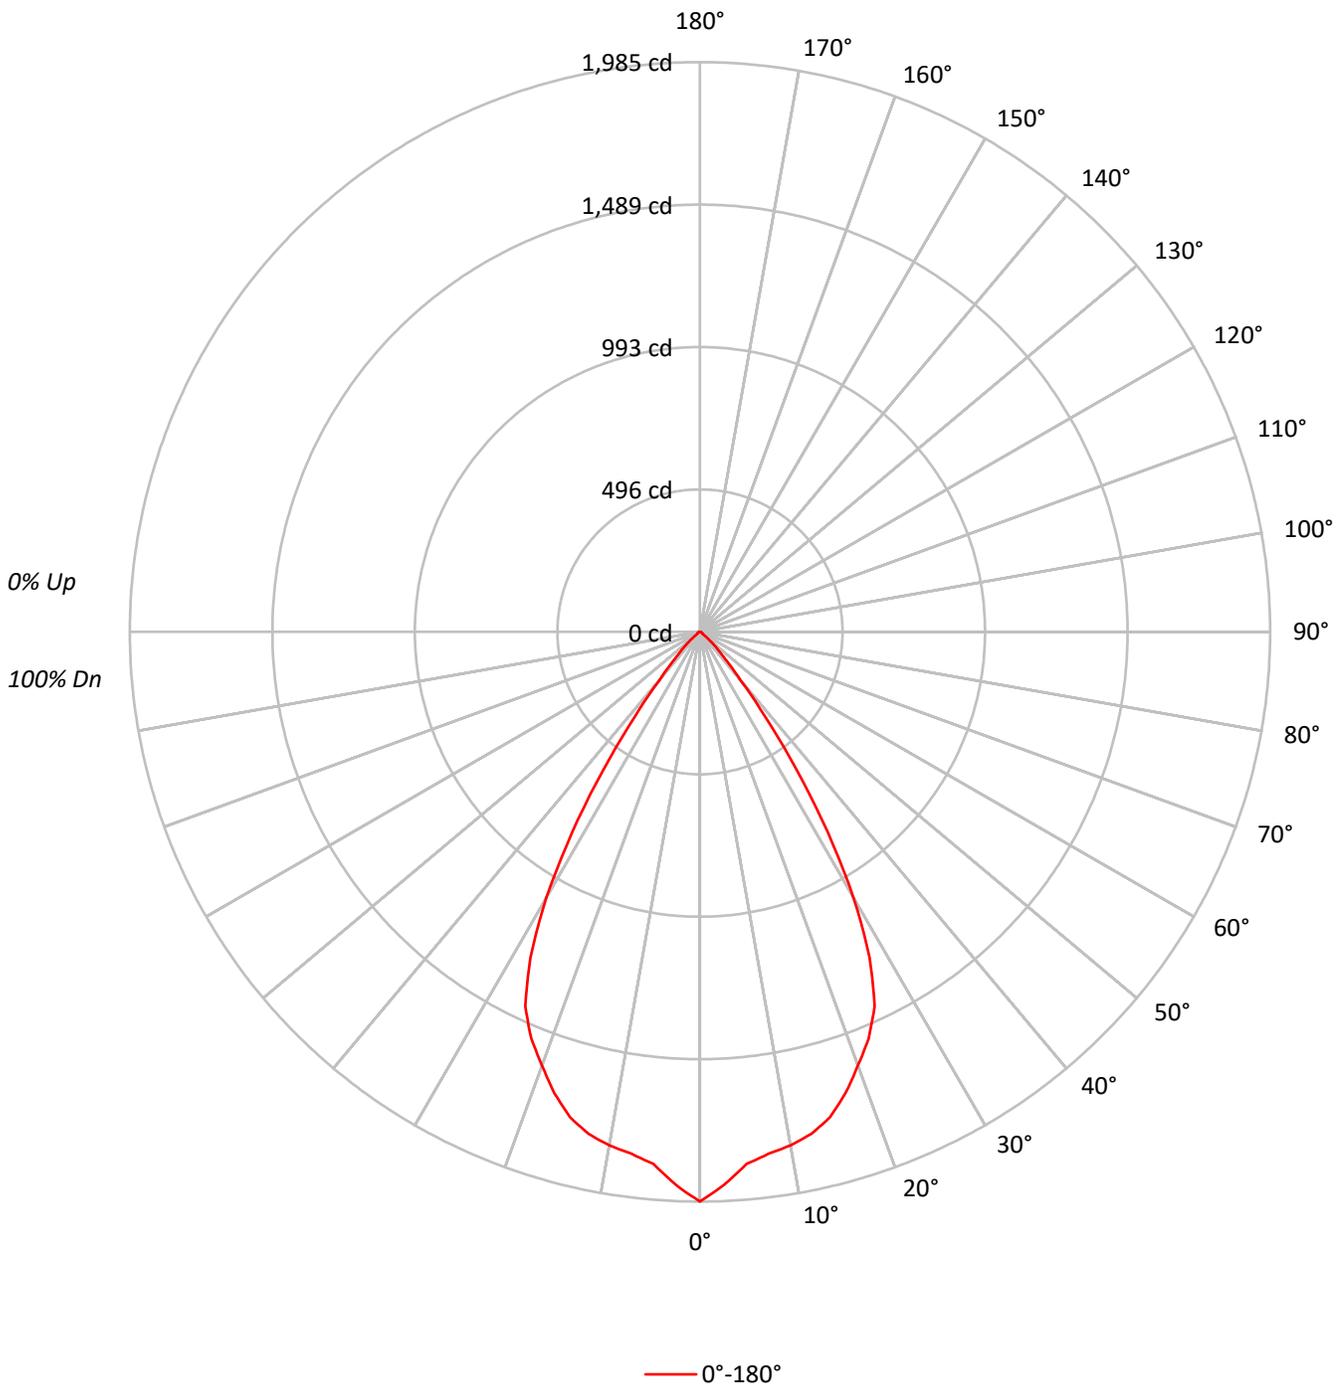



TEST NUMBER: P1287667  
 CATALOG NUMBER: P3AS17R659030D2WDE010 E3CD1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94	94	94	94
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87	87	87	87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	88	85	83	81	81	81	81
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	75	75	75	75
5	93	84	78	74	91	83	78	74	82	77	73	80	76	73	78	75	72	70	70	70	70
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62	62	62	62
8	80	70	64	60	78	69	64	60	68	63	60	67	63	59	66	62	59	58	58	58	58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
10	72	63	57	53	71	62	57	53	61	56	53	60	56	53	60	55	52	51	51	51	51

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	435228
5°	409640
10°	404424
15°	397301
20°	375116
25°	348141
30°	270624
35°	156546
40°	63090
45°	29026
50°	11292
55°	4396
60°	3772
65°	3736
70°	3719
75°	3643
80°	3662
85°	3522

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 29026 cd/sqm



TEST NUMBER: P1287667

CATALOG NUMBER: P3AS17R659030D2WDE010 E3CD1MMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	176.9	9.9
10°-20°	488.7	27.4
20°-30°	639.7	35.9
30°-40°	370.6	20.8
40°-50°	79.3	4.5
50°-60°	12.9	0.7
60°-70°	7.1	0.4
70°-80°	4.2	0.2
80°-90°	1.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1305.4	73.3
0°-40°	1675.9	94.1
0°-60°	1768.1	99.3
0°-90°	1781.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1781.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1985	
5°	1861	177
15°	1750	489
25°	1439	640
35°	585	371
45°	94	79
55°	12	13
65°	7	7
75°	4	4
85°	1	2
90°	0	



TEST NUMBER: P1287667  
CATALOG NUMBER: P3AS17R659030D2WDE010 E3CD1MMS

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1984.8
2.5°	1928.7
5°	1861.0
7.5°	1833.6
10°	1816.3
12.5°	1791.8
15°	1750.1
17.5°	1685.2
20°	1607.5
22.5°	1534.0
25°	1438.9
27.5°	1279.1
30°	1068.8
32.5°	828.2
35°	584.8
37.5°	370.2
40°	220.4
42.5°	138.3
45°	93.6
47.5°	60.5
50°	33.1
52.5°	15.8
55°	11.5
57.5°	10.1
60°	8.6
62.5°	8.6
65°	7.2
67.5°	5.8
70°	5.8
72.5°	4.3
75°	4.3
77.5°	2.9
80°	2.9
82.5°	1.4
85°	1.4
87.5°	1.4
90°	0.0

(END OF REPORT)