

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1288063

Luminaire Tested: P3AS05R15W2N902765DE010 E3PHLP1MW_2700K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1288063
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-5)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R15W2N902765DE010 E3PHLP1MW_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R15 optic, 2700K CCT AND, 90CRI ,
E3PHLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 167.0 lumens
Efficiency: N/A
Efficacy: 28.3 lumens/watt
Spacing Criteria (0/90/45): 0.51 / 0.51 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1288063

CATALOG NUMBER: P3AS05R15W2N902765DE010 E3PHLP1MW_2700K

Luminous Intensity Polar Plot

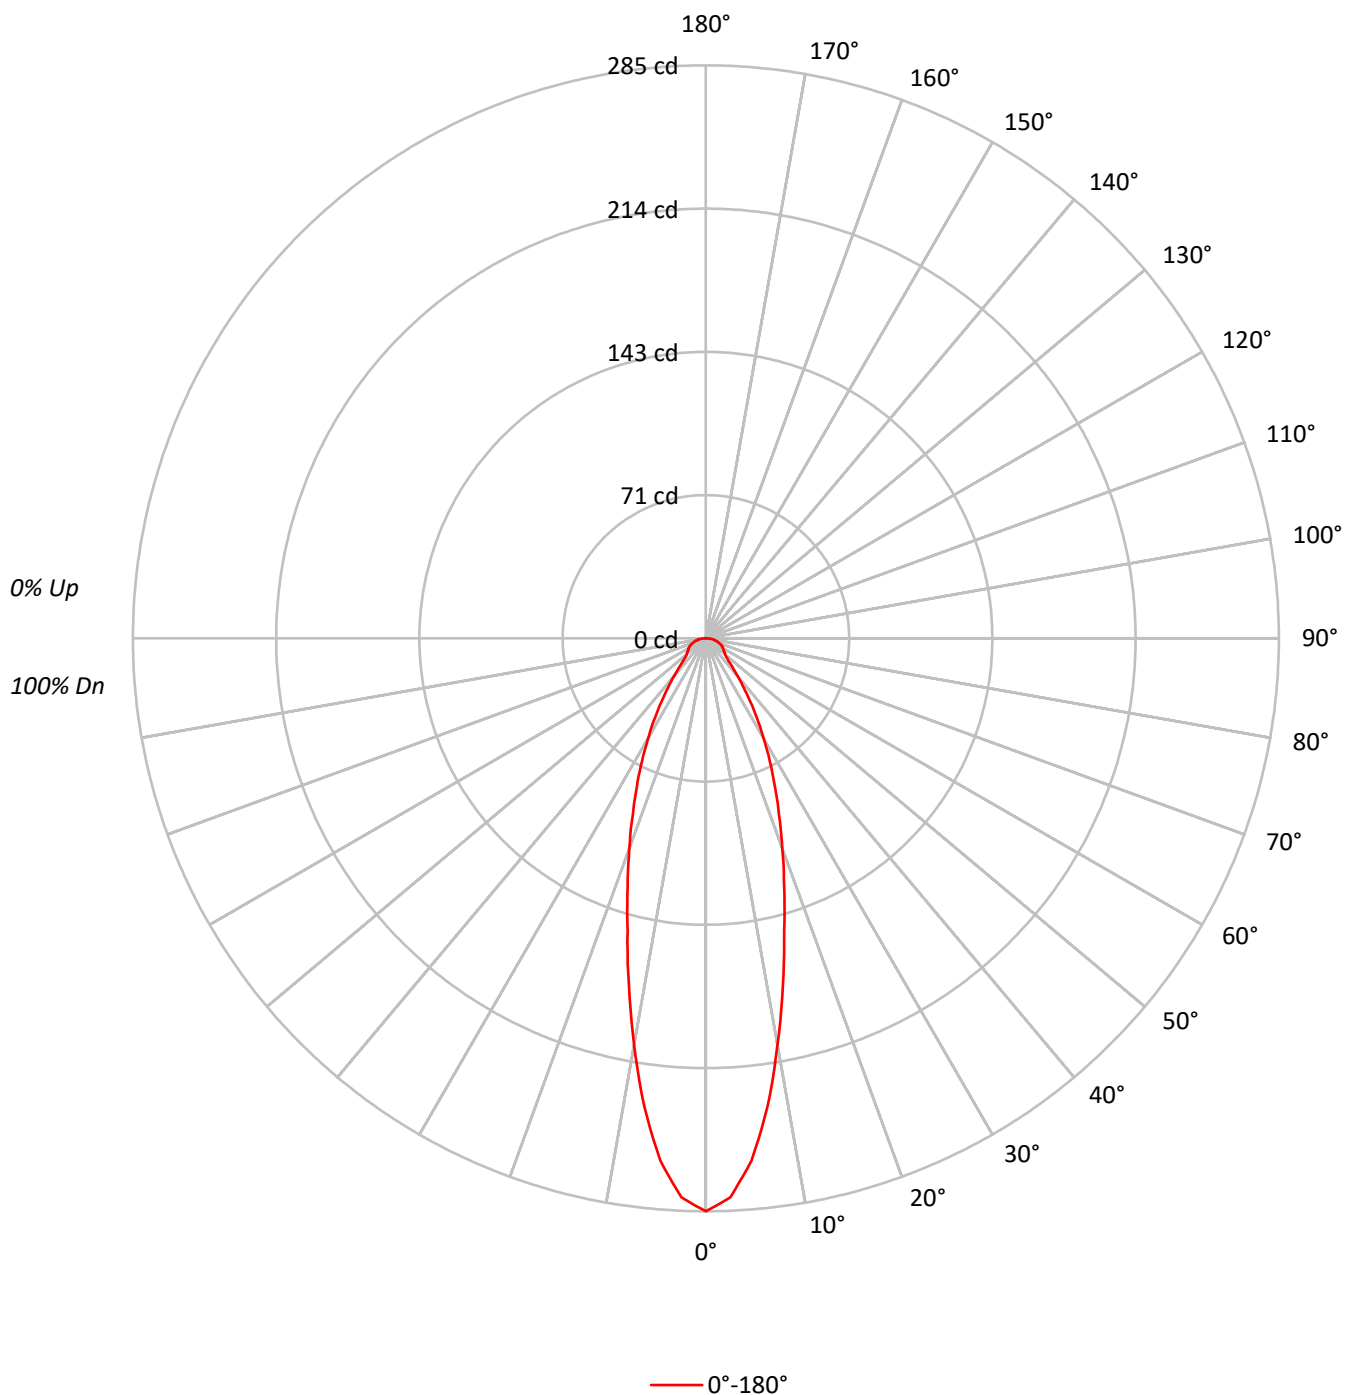

TEST NUMBER: P1288063

CATALOG NUMBER: P3AS05R15W2N902765DE010 E3PHLP1MW_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	100
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	95	93	92	92	92	90
2	105	99	94	90	102	97	92	89	94	90	87	91	87	85	88	85	83	83	83	81
3	99	91	85	80	96	89	84	80	87	82	78	84	80	77	82	79	76	76	76	74
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	70	70	68
5	88	78	72	67	86	77	71	67	76	70	66	74	69	65	72	68	65	65	65	63
6	83	73	67	62	82	73	66	62	71	65	61	70	65	61	68	64	60	60	60	59
7	79	69	62	58	78	68	62	58	67	61	57	66	61	57	65	60	57	57	57	55
8	75	65	59	54	74	65	58	54	63	58	54	62	57	54	61	57	53	53	53	52
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	50	50	49
10	69	59	52	48	68	58	52	48	57	52	48	56	51	48	56	51	48	48	48	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	62495
5°	57385
10°	45735
15°	34166
20°	25949
25°	19646
30°	14534
35°	10386
40°	7099
45°	4962
50°	4230
55°	4167
60°	4298
65°	4566
70°	4616
75°	4829
80°	5177
85°	5284

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 82.5°
Luminance: 6048 cd/sqm

TEST NUMBER: P1288063

CATALOG NUMBER: P3AS05R15W2N902765DE010 E3PHLP1MW_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	23.1	13.8
10°-20°	42.2	25.3
20°-30°	37.4	22.4
30°-40°	24.5	14.7
40°-50°	13.1	7.8
50°-60°	9.9	5.9
60°-70°	8.5	5.1
70°-80°	5.9	3.5
80°-90°	2.4	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	102.7	61.5
0°-40°	127.2	76.2
0°-60°	150.2	90.0
0°-90°	167.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	167.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	285	
5°	261	23
15°	150	42
25°	81	37
35°	39	24
45°	16	13
55°	11	10
65°	9	9
75°	6	6
85°	2	2
90°	0	

TEST NUMBER: P1288063

CATALOG NUMBER: P3AS05R15W2N902765DE010 E3PHLP1MW_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	285.0
2.5°	278.3
5°	260.7
7.5°	234.9
10°	205.4
12.5°	176.9
15°	150.5
17.5°	129.3
20°	111.2
22.5°	95.2
25°	81.2
27.5°	68.8
30°	57.4
32.5°	47.6
35°	38.8
37.5°	31.0
40°	24.8
42.5°	19.7
45°	16.0
47.5°	14.0
50°	12.4
52.5°	11.9
55°	10.9
57.5°	10.3
60°	9.8
62.5°	9.3
65°	8.8
67.5°	7.8
70°	7.2
72.5°	6.2
75°	5.7
77.5°	4.7
80°	4.1
82.5°	3.6
85°	2.1
87.5°	1.0
90°	0.0

(END OF REPORT)