

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1288124

Luminaire Tested: P3AS05R20W2N902750DE010 E3DL1GPH_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1288124
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R20W2N902750DE010 E3DL1GPH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 2700K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 182.0 lumens
Efficiency: N/A
Efficacy: 30.8 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1288124

CATALOG NUMBER: P3AS05R20W2N902750DE010 E3DL1GPH_2700K

Luminous Intensity Polar Plot

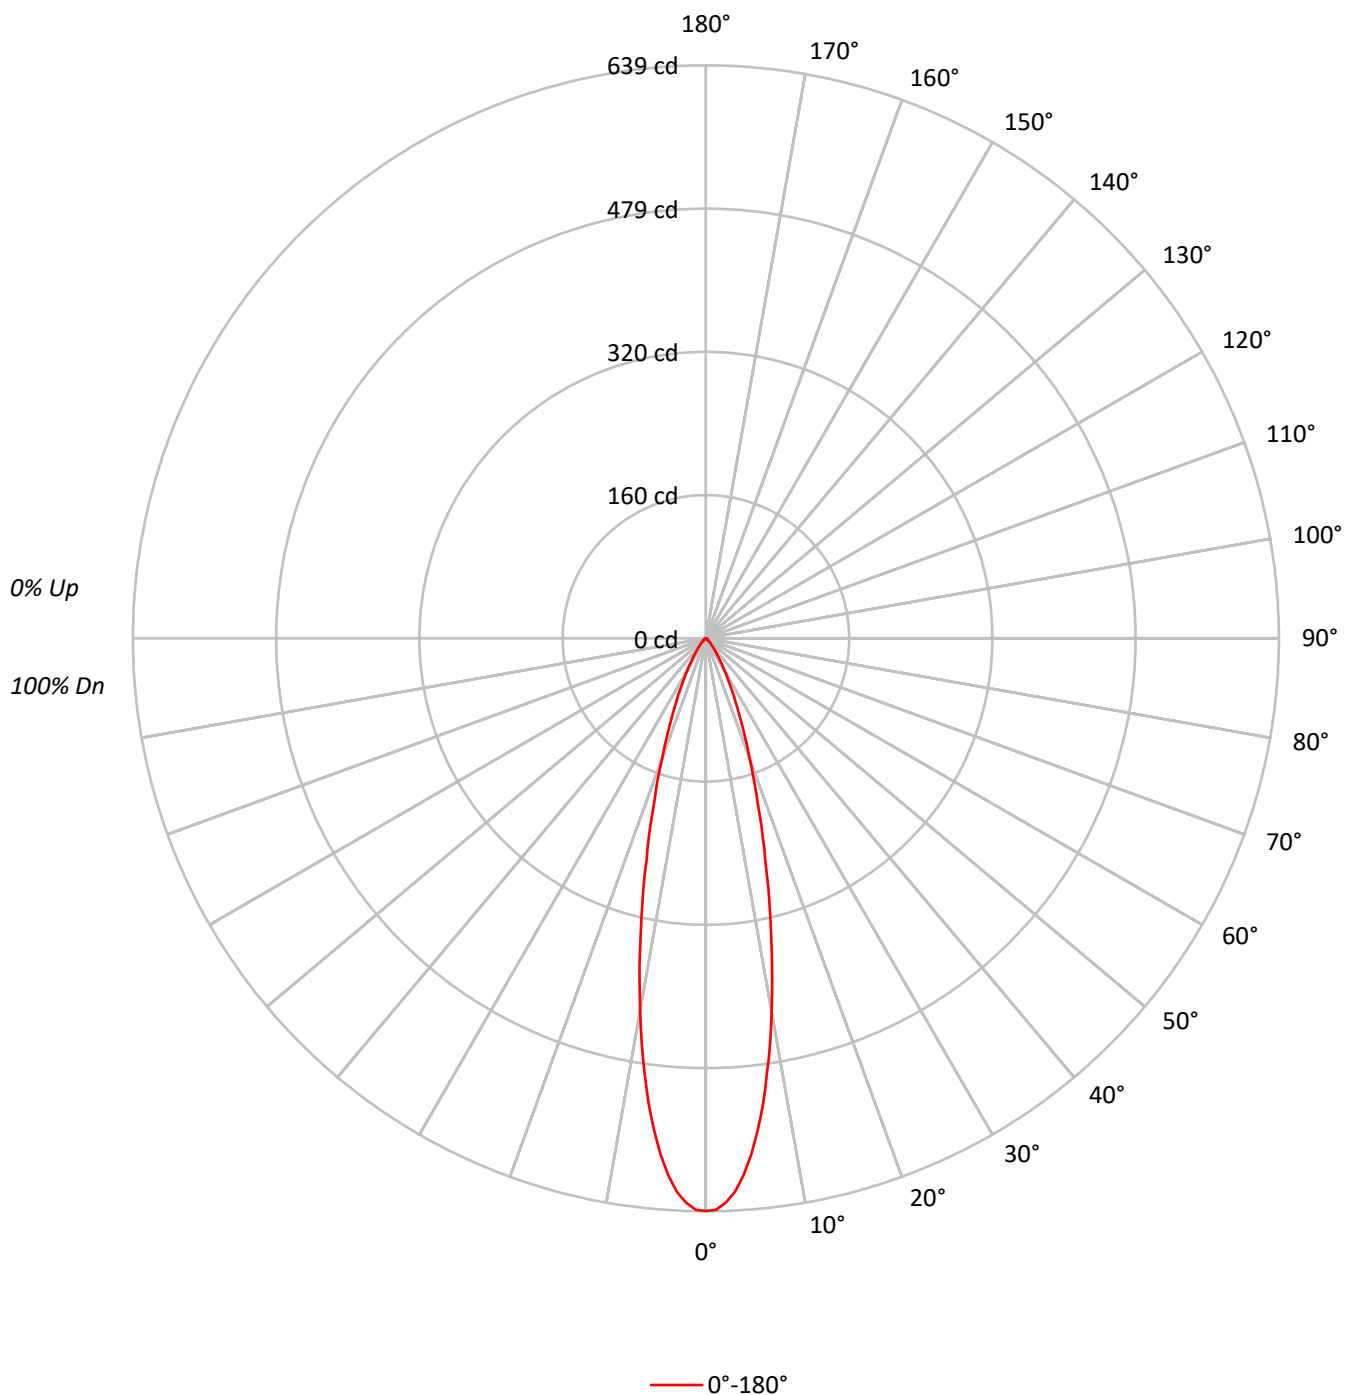

TEST NUMBER: P1288124

CATALOG NUMBER: P3AS05R20W2N902750DE010 E3DL1GPH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95		
2	110	106	102	100	108	104	101	98	101	98	96	98	96	94	95	94	92	91		
3	106	100	96	93	104	99	95	92	97	93	91	94	92	89	92	90	88	87		
4	102	96	91	88	100	95	90	87	92	89	86	91	88	85	89	86	84	83		
5	98	91	87	83	97	90	86	83	89	85	82	87	84	81	86	83	81	79		
6	95	87	83	79	93	87	82	79	85	81	78	84	81	78	83	80	77	76		
7	91	84	79	76	90	83	79	76	82	78	75	81	78	75	80	77	75	73		
8	88	81	76	73	87	80	76	73	79	75	72	78	75	72	77	74	72	71		
9	85	78	73	70	85	77	73	70	77	73	70	76	72	69	75	72	69	68		
10	83	75	71	68	82	75	70	67	74	70	67	73	70	67	73	69	67	66		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	140033
5°	127294
10°	94075
15°	58184
20°	33230
25°	18969
30°	10635
35°	5782
40°	3177
45°	1737
50°	1023
55°	726
60°	702
65°	623
70°	577
75°	593
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1737 cd/sqm

TEST NUMBER: P1288124

CATALOG NUMBER: P3AS05R20W2N902750DE010 E3DL1GPH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.1	27.5
10°-20°	71.5	39.3
20°-30°	37.3	20.5
30°-40°	14.4	7.9
40°-50°	4.7	2.6
50°-60°	1.9	1.0
60°-70°	1.2	0.7
70°-80°	0.7	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	158.9	87.3
0°-40°	173.3	95.2
0°-60°	179.8	98.8
0°-90°	182.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	182.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	639	
5°	578	50
15°	256	71
25°	78	37
35°	22	14
45°	6	5
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1288124

CATALOG NUMBER: P3AS05R20W2N902750DE010 E3DL1GPH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	638.6
1°	637.3
2°	629.8
3°	618.2
4°	600.3
5°	578.3
6°	552.3
7°	523.4
8°	490.0
9°	457.5
10°	422.5
12.5°	335.8
15°	256.3
17.5°	191.8
20°	142.4
22.5°	105.5
25°	78.4
27.5°	57.8
30°	42.0
32.5°	30.4
35°	21.6
37.5°	15.6
40°	11.1
42.5°	7.9
45°	5.6
47.5°	4.0
50°	3.0
52.5°	2.3
55°	1.9
57.5°	1.8
60°	1.6
62.5°	1.4
65°	1.2
67.5°	1.1
70°	0.9
72.5°	0.9
75°	0.7
77.5°	0.5
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

(END OF REPORT)