

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1288238

Luminaire Tested: P3AS05R20W2N902765DE010 E3D1H\_4000K

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1288238  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-8)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R20W2N902765DE010 E3D1H\_4000K  
Description: 3in Adjustable Tunable White LED luminaire with, R20 optic, 4000K CCT AND, 90CRI , E3D1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 503.0 lumens  
Efficiency: N/A  
Efficacy: 85.3 lumens/watt  
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1288238

CATALOG NUMBER: P3AS05R20W2N902765DE010 E3D1H\_4000K

### Luminous Intensity Polar Plot

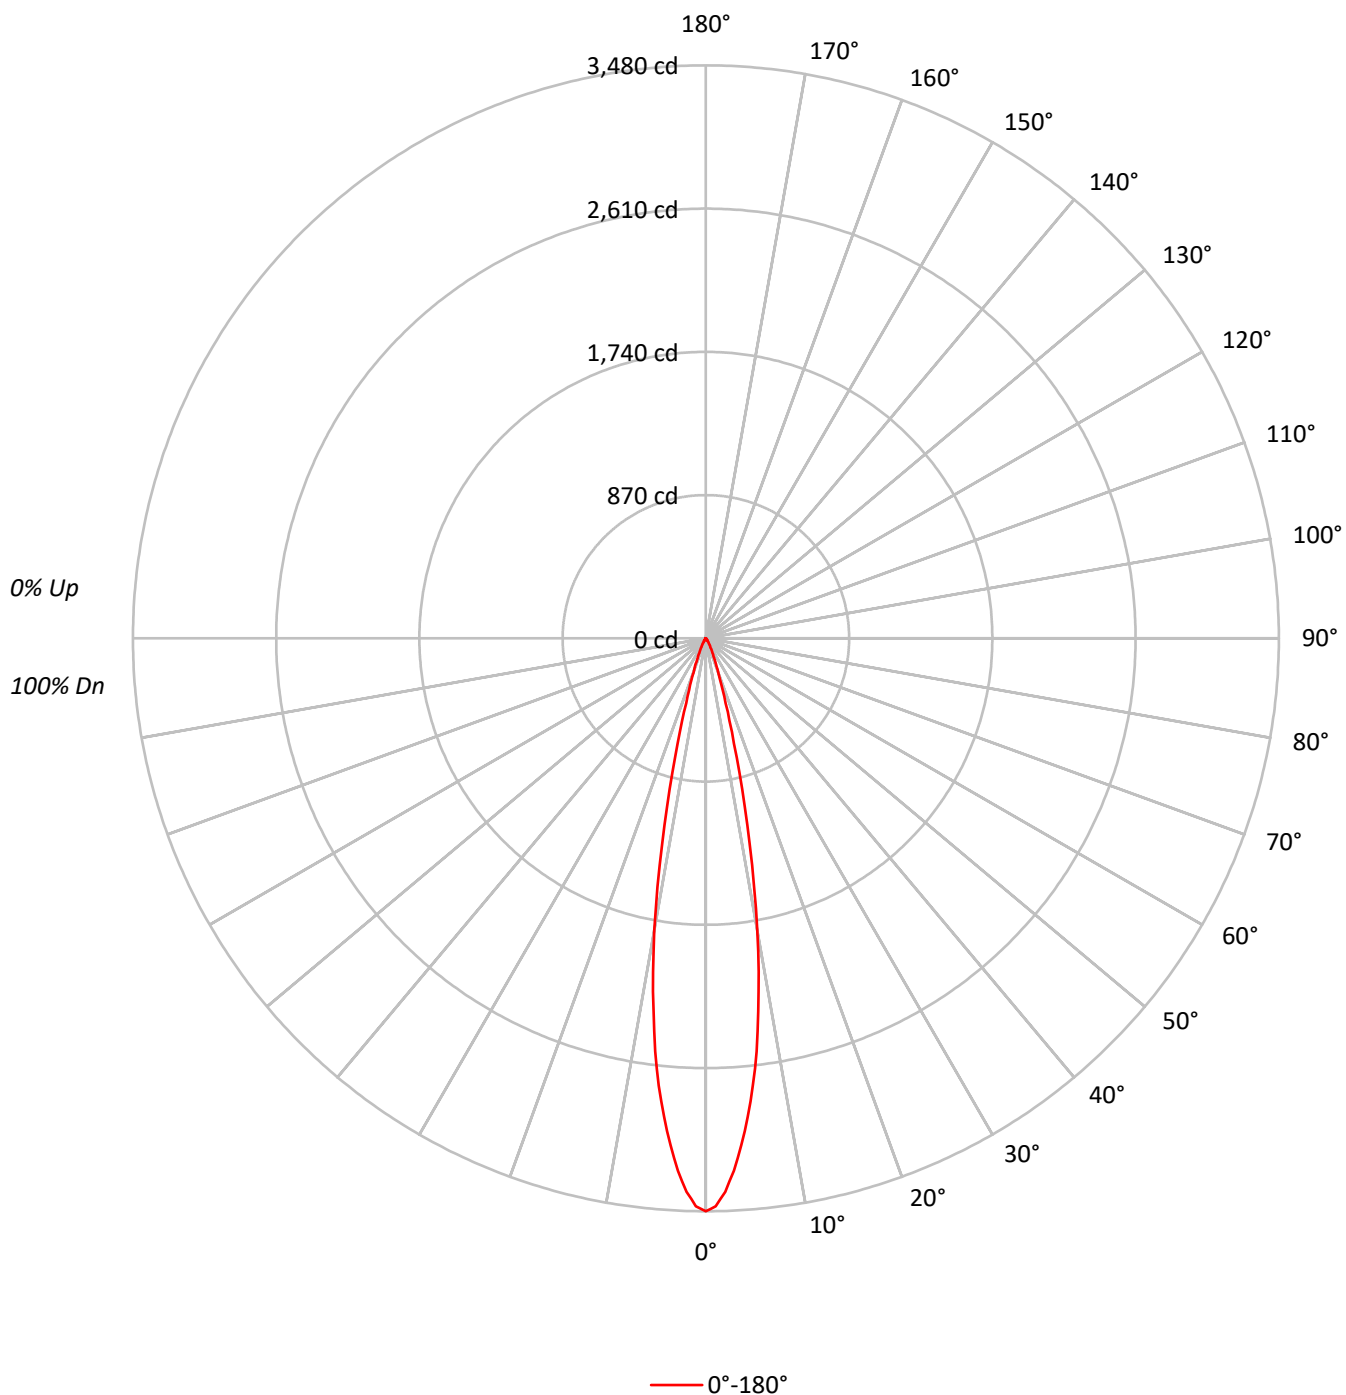



TEST NUMBER: P1288238

CATALOG NUMBER: P3AS05R20W2N902765DE010 E3D1H\_4000K

### COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |  |  |  |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     |     |  |  |  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |     |     | 0   |  |  |  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 0   |  |  |  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |  |  |  |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |  |  |  |
| 1   | 115 | 114 | 112 | 110 | 113 | 111 | 110 | 108 | 107 | 106 | 105 | 104 | 103 | 102 | 100 | 100 | 99  | 97  | 97  | 97  | 97  |  |  |  |
| 2   | 112 | 109 | 106 | 104 | 110 | 107 | 105 | 103 | 104 | 102 | 101 | 101 | 100 | 98  | 99  | 98  | 96  | 95  | 95  | 95  | 95  |  |  |  |
| 3   | 109 | 105 | 102 | 99  | 107 | 104 | 101 | 98  | 101 | 99  | 97  | 99  | 97  | 95  | 97  | 95  | 94  | 93  | 93  | 93  | 93  |  |  |  |
| 4   | 106 | 101 | 98  | 95  | 105 | 100 | 97  | 95  | 99  | 96  | 94  | 97  | 95  | 93  | 95  | 93  | 92  | 91  | 91  | 91  | 91  |  |  |  |
| 5   | 104 | 98  | 95  | 92  | 102 | 98  | 94  | 92  | 96  | 93  | 91  | 95  | 92  | 90  | 93  | 91  | 90  | 89  | 89  | 89  | 89  |  |  |  |
| 6   | 101 | 96  | 92  | 89  | 100 | 95  | 92  | 89  | 94  | 91  | 89  | 93  | 90  | 88  | 92  | 89  | 88  | 87  | 87  | 87  | 87  |  |  |  |
| 7   | 99  | 93  | 90  | 87  | 98  | 93  | 89  | 87  | 92  | 89  | 86  | 91  | 88  | 86  | 90  | 87  | 86  | 85  | 85  | 85  | 85  |  |  |  |
| 8   | 97  | 91  | 87  | 85  | 96  | 91  | 87  | 85  | 90  | 87  | 85  | 89  | 86  | 84  | 88  | 86  | 84  | 83  | 83  | 83  | 83  |  |  |  |
| 9   | 95  | 89  | 85  | 83  | 94  | 89  | 85  | 83  | 88  | 85  | 83  | 87  | 84  | 83  | 87  | 84  | 82  | 81  | 81  | 81  | 81  |  |  |  |
| 10  | 93  | 87  | 84  | 81  | 92  | 87  | 83  | 81  | 86  | 83  | 81  | 86  | 83  | 81  | 85  | 83  | 81  | 80  | 80  | 80  | 80  |  |  |  |

**AVERAGE LUMINANCE (cd/sqm):**

|     | 0°     |
|-----|--------|
| 0°  | 763009 |
| 5°  | 642415 |
| 10° | 401240 |
| 15° | 150012 |
| 20° | 51501  |
| 25° | 21461  |
| 30° | 10103  |
| 35° | 4524   |
| 40° | 2147   |
| 45° | 1085   |
| 50° | 409    |
| 55° | 76     |
| 60° | 88     |
| 65° | 104    |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle:  $45^\circ$

Luminance: 1085 cd/sqm

TEST NUMBER: P1288238

CATALOG NUMBER: P3AS05R20W2N902765DE010 E3D1H\_4000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 242.7  | 48.3      |
| 10°-20°   | 199.9  | 39.7      |
| 20°-30°   | 45.4   | 9.0       |
| 30°-40°   | 11.6   | 2.3       |
| 40°-50°   | 2.9    | 0.6       |
| 50°-60°   | 0.4    | 0.1       |
| 60°-70°   | 0.1    | 0.0       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 488.0  | 97.0      |
| 0°-40°    | 499.6  | 99.3      |
| 0°-60°    | 502.9  | 100.0     |
| 0°-90°    | 503.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 503.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 3480 |      |
| 5°  | 2918 | 243  |
| 15° | 661  | 200  |
| 25° | 89   | 45   |
| 35° | 17   | 12   |
| 45° | 4    | 3    |
| 55° | 0    | 0    |
| 65° | 0    | 0    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1288238

CATALOG NUMBER: P3AS05R20W2N902765DE010 E3D1H\_4000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 3479.6 |
| 1°    | 3450.1 |
| 2°    | 3363.2 |
| 3°    | 3238.5 |
| 4°    | 3085.5 |
| 5°    | 2918.5 |
| 6°    | 2732.5 |
| 7°    | 2527.2 |
| 8°    | 2287.6 |
| 9°    | 2050.2 |
| 10°   | 1802.0 |
| 11°   | 1537.9 |
| 12°   | 1274.2 |
| 13°   | 1050.8 |
| 14°   | 837.2  |
| 15°   | 660.8  |
| 16°   | 521.6  |
| 17°   | 411.4  |
| 18°   | 330.6  |
| 19°   | 268.8  |
| 20°   | 220.7  |
| 21°   | 184.5  |
| 22°   | 154.0  |
| 23°   | 128.0  |
| 24°   | 106.8  |
| 25°   | 88.7   |
| 27.5° | 58.0   |
| 30°   | 39.9   |
| 32.5° | 24.6   |
| 35°   | 16.9   |
| 37.5° | 10.8   |
| 40°   | 7.5    |
| 42.5° | 5.1    |
| 45°   | 3.5    |
| 47.5° | 2.4    |
| 50°   | 1.2    |
| 52.5° | 0.6    |
| 55°   | 0.2    |
| 57.5° | 0.2    |
| 60°   | 0.2    |
| 62.5° | 0.2    |
| 65°   | 0.2    |
| 67.5° | 0.0    |
| 70°   | 0.0    |
| 72.5° | 0.0    |



TEST NUMBER: P1288238

CATALOG NUMBER: P3AS05R20W2N902765DE010 E3D1H\_4000K

**CANDELA DISTRIBUTION (continued):**

|       | 0°  |
|-------|-----|
| 75°   | 0.0 |
| 77.5° | 0.0 |
| 80°   | 0.0 |
| 82.5° | 0.0 |
| 85°   | 0.0 |
| 87.5° | 0.0 |
| 90°   | 0.0 |

(END OF REPORT)