

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1288411

Luminaire Tested: P3AS05R25W2N902750DE010 E3DL1GPH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1288411
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R25W2N902750DE010 E3DL1GPH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 3000K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 203.1 lumens
Efficiency: N/A
Efficacy: 34.4 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1288411

CATALOG NUMBER: P3AS05R25W2N902750DE010 E3DL1GPH_3000K

Luminous Intensity Polar Plot

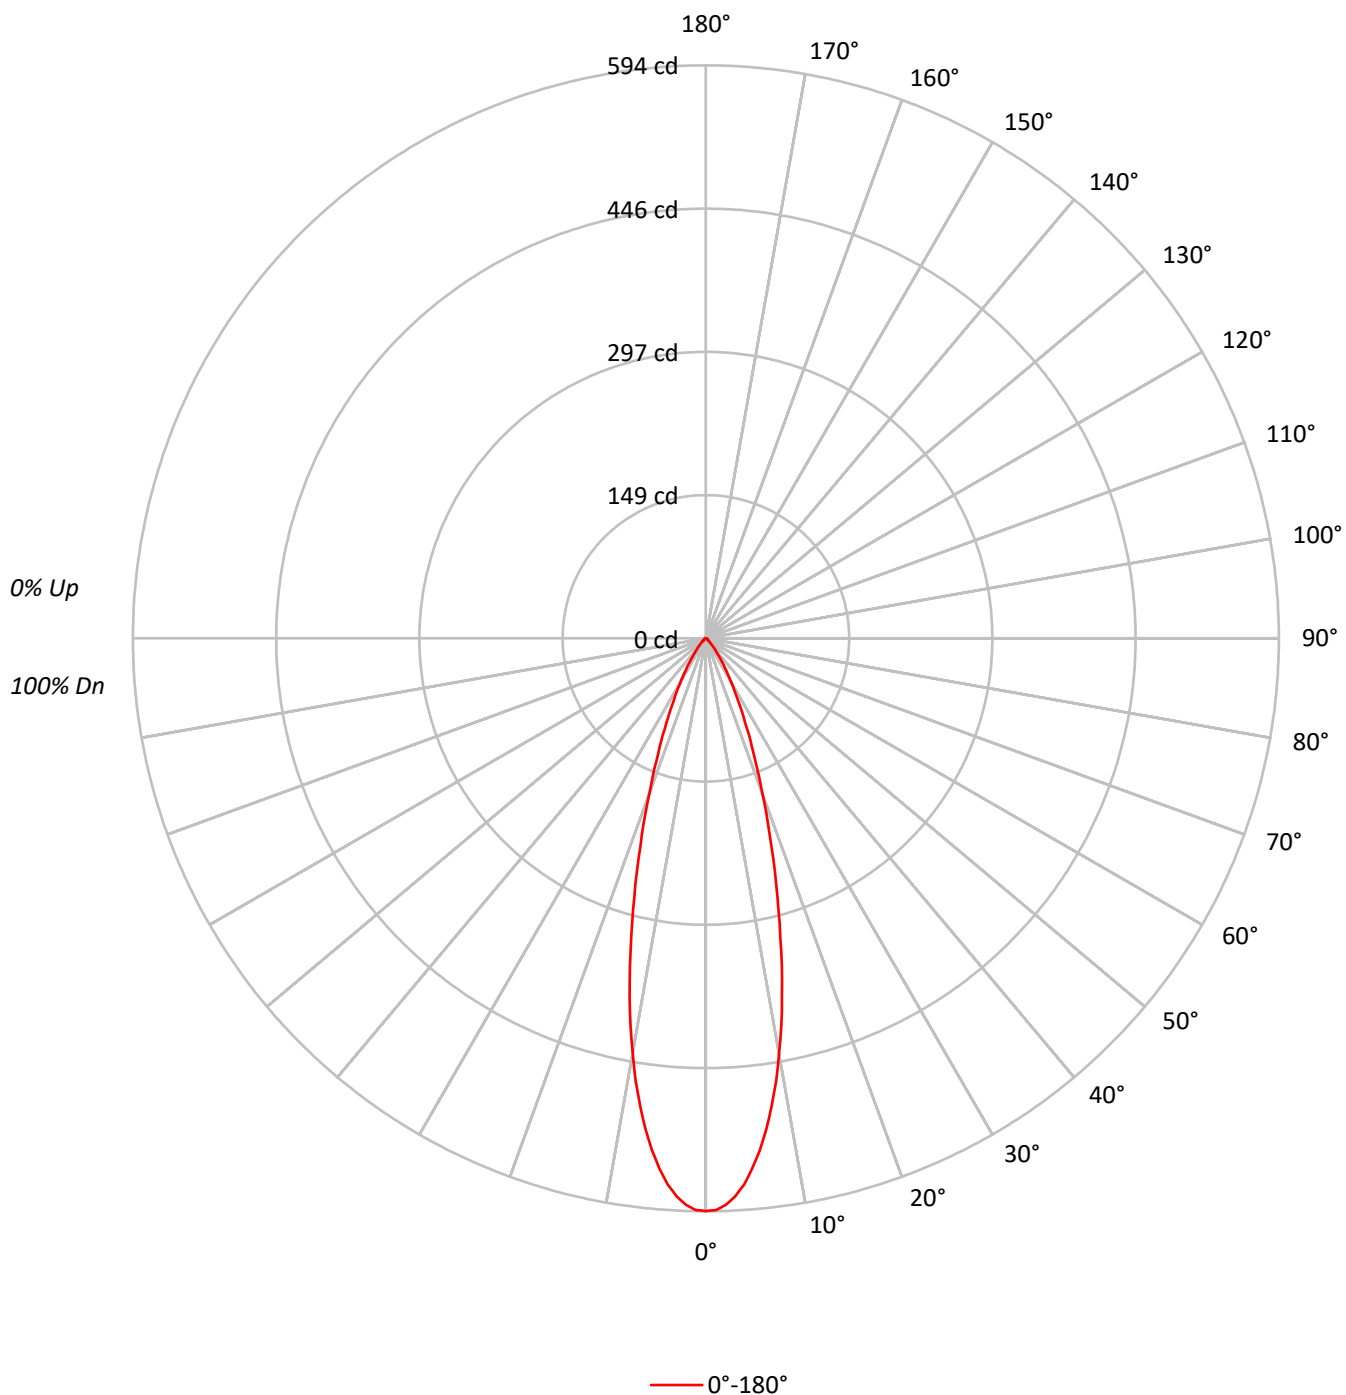

TEST NUMBER: P1288411

CATALOG NUMBER: P3AS05R25W2N902750DE010 E3DL1GPH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	90	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	86	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	82	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	78	78
6	94	86	81	78	92	86	81	77	84	80	77	83	79	76	82	78	76	75	75	75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	75	73	72	72	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	68	73	70	67	66	66	66
10	81	73	69	65	80	73	68	65	72	68	65	72	68	65	71	67	65	64	64	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	130209
5°	121483
10°	97326
15°	66062
20°	39973
25°	23372
30°	13319
35°	7335
40°	3893
45°	2047
50°	1194
55°	879
60°	746
65°	830
70°	769
75°	678
80°	505
85°	503

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2047 cd/sqm

TEST NUMBER: P1288411

CATALOG NUMBER: P3AS05R25W2N902750DE010 E3DL1GPH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.0	24.1
10°-20°	80.0	39.4
20°-30°	45.7	22.5
30°-40°	18.0	8.9
40°-50°	5.5	2.7
50°-60°	2.2	1.1
60°-70°	1.5	0.7
70°-80°	0.8	0.4
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	174.7	86.0
0°-40°	192.7	94.9
0°-60°	200.4	98.7
0°-90°	203.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	203.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	594	
5°	552	49
15°	291	80
25°	97	46
35°	27	18
45°	7	6
55°	2	2
65°	2	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1288411

CATALOG NUMBER: P3AS05R25W2N902750DE010 E3DL1GPH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	593.8
1°	592.7
2°	587.8
3°	579.3
4°	567.5
5°	551.9
6°	533.7
7°	513.1
8°	489.3
9°	464.8
10°	437.1
11°	409.7
12°	379.7
13°	350.0
14°	319.5
15°	291.0
17.5°	225.6
20°	171.3
22.5°	128.6
25°	96.6
27.5°	71.6
30°	52.6
32.5°	38.0
35°	27.4
37.5°	19.4
40°	13.6
42.5°	9.3
45°	6.6
47.5°	4.7
50°	3.5
52.5°	2.7
55°	2.3
57.5°	2.1
60°	1.7
62.5°	1.6
65°	1.6
67.5°	1.4
70°	1.2
72.5°	1.0
75°	0.8
77.5°	0.6
80°	0.4
82.5°	0.4
85°	0.2
87.5°	0.2



TEST NUMBER: P1288411

CATALOG NUMBER: P3AS05R25W2N902750DE010 E3DL1GPH_3000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)