

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1288533

Luminaire Tested: P3AS05R25W2N902765DE010 E3CD1MB_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1288533
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R25W2N902765DE010 E3CD1MB_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R25 optic, 2700K CCT AND, 90CRI ,
E3CD1MB TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 456.0 lumens
Efficiency: N/A
Efficacy: 77.3 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1288533

CATALOG NUMBER: P3AS05R25W2N902765DE010 E3CD1MB_2700K

Luminous Intensity Polar Plot

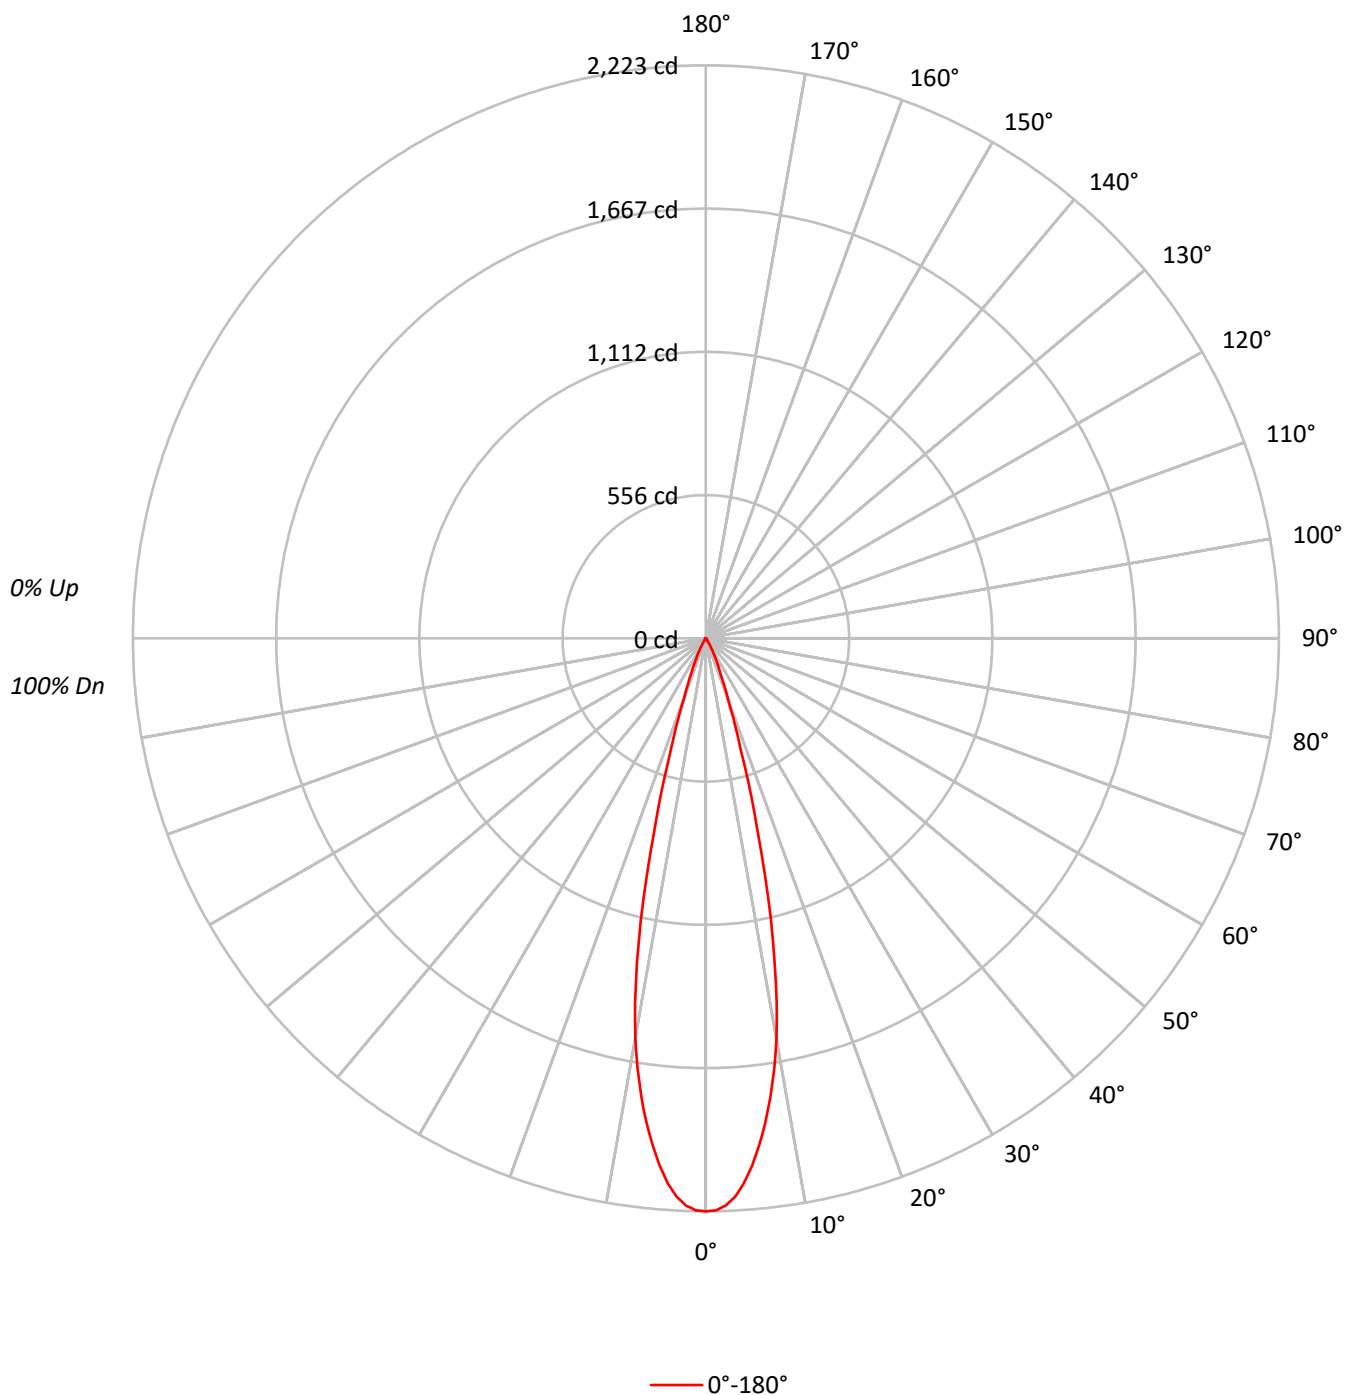



TEST NUMBER: P1288533

CATALOG NUMBER: P3AS05R25W2N902765DE010 E3CD1MB_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0			
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97			
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94			
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92			
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89			
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87			
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85			
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83			
8	95	89	85	83	94	89	85	82	88	84	82	87	84	82	86	83	81	81			
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79			
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	487527
5°	452167
10°	350673
15°	175824
20°	57778
25°	22961
30°	8609
35°	2490
40°	1116
45°	434
50°	375
55°	268
60°	307
65°	363
70°	256
75°	339
80°	505
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 505 cd/sqm

TEST NUMBER: P1288533

CATALOG NUMBER: P3AS05R25W2N902765DE010 E3CD1MB_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	180.7	39.6
10°-20°	215.6	47.3
20°-30°	48.6	10.7
30°-40°	7.9	1.7
40°-50°	1.4	0.3
50°-60°	0.8	0.2
60°-70°	0.7	0.1
70°-80°	0.4	0.1
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	444.8	97.5
0°-40°	452.7	99.3
0°-60°	454.9	99.8
0°-90°	456.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	456.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2223	
5°	2054	181
15°	774	216
25°	95	49
35°	9	8
45°	1	1
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1288533

CATALOG NUMBER: P3AS05R25W2N902765DE010 E3CD1MB_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	2223.3
1°	2219.7
2°	2201.8
3°	2168.9
4°	2119.1
5°	2054.2
6°	1976.8
7°	1893.0
8°	1797.0
9°	1692.0
10°	1574.9
11°	1439.8
12°	1284.3
13°	1121.7
14°	947.2
15°	774.5
17.5°	441.4
20°	247.6
22.5°	149.4
25°	94.9
27.5°	58.4
30°	34.0
32.5°	17.9
35°	9.3
37.5°	6.1
40°	3.9
42.5°	2.5
45°	1.4
47.5°	1.1
50°	1.1
52.5°	1.1
55°	0.7
57.5°	0.7
60°	0.7
62.5°	0.7
65°	0.7
67.5°	0.7
70°	0.4
72.5°	0.4
75°	0.4
77.5°	0.4
80°	0.4
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1288533

CATALOG NUMBER: P3AS05R25W2N902765DE010 E3CD1MB_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)