

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1288777

Luminaire Tested: P3AS05R30W2N902750DE010 E3DL1MW_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1288777
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R30W2N902750DE010 E3DL1MW_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R30 optic, 2700K CCT AND, 90CRI ,
E3DL1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 380.0 lumens
Efficiency: N/A
Efficacy: 64.4 lumens/watt
Spacing Criteria (0/90/45): 0.54 / 0.54 / 0.54
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1288777

CATALOG NUMBER: P3AS05R30W2N902750DE010 E3DL1MW_2700K

Luminous Intensity Polar Plot

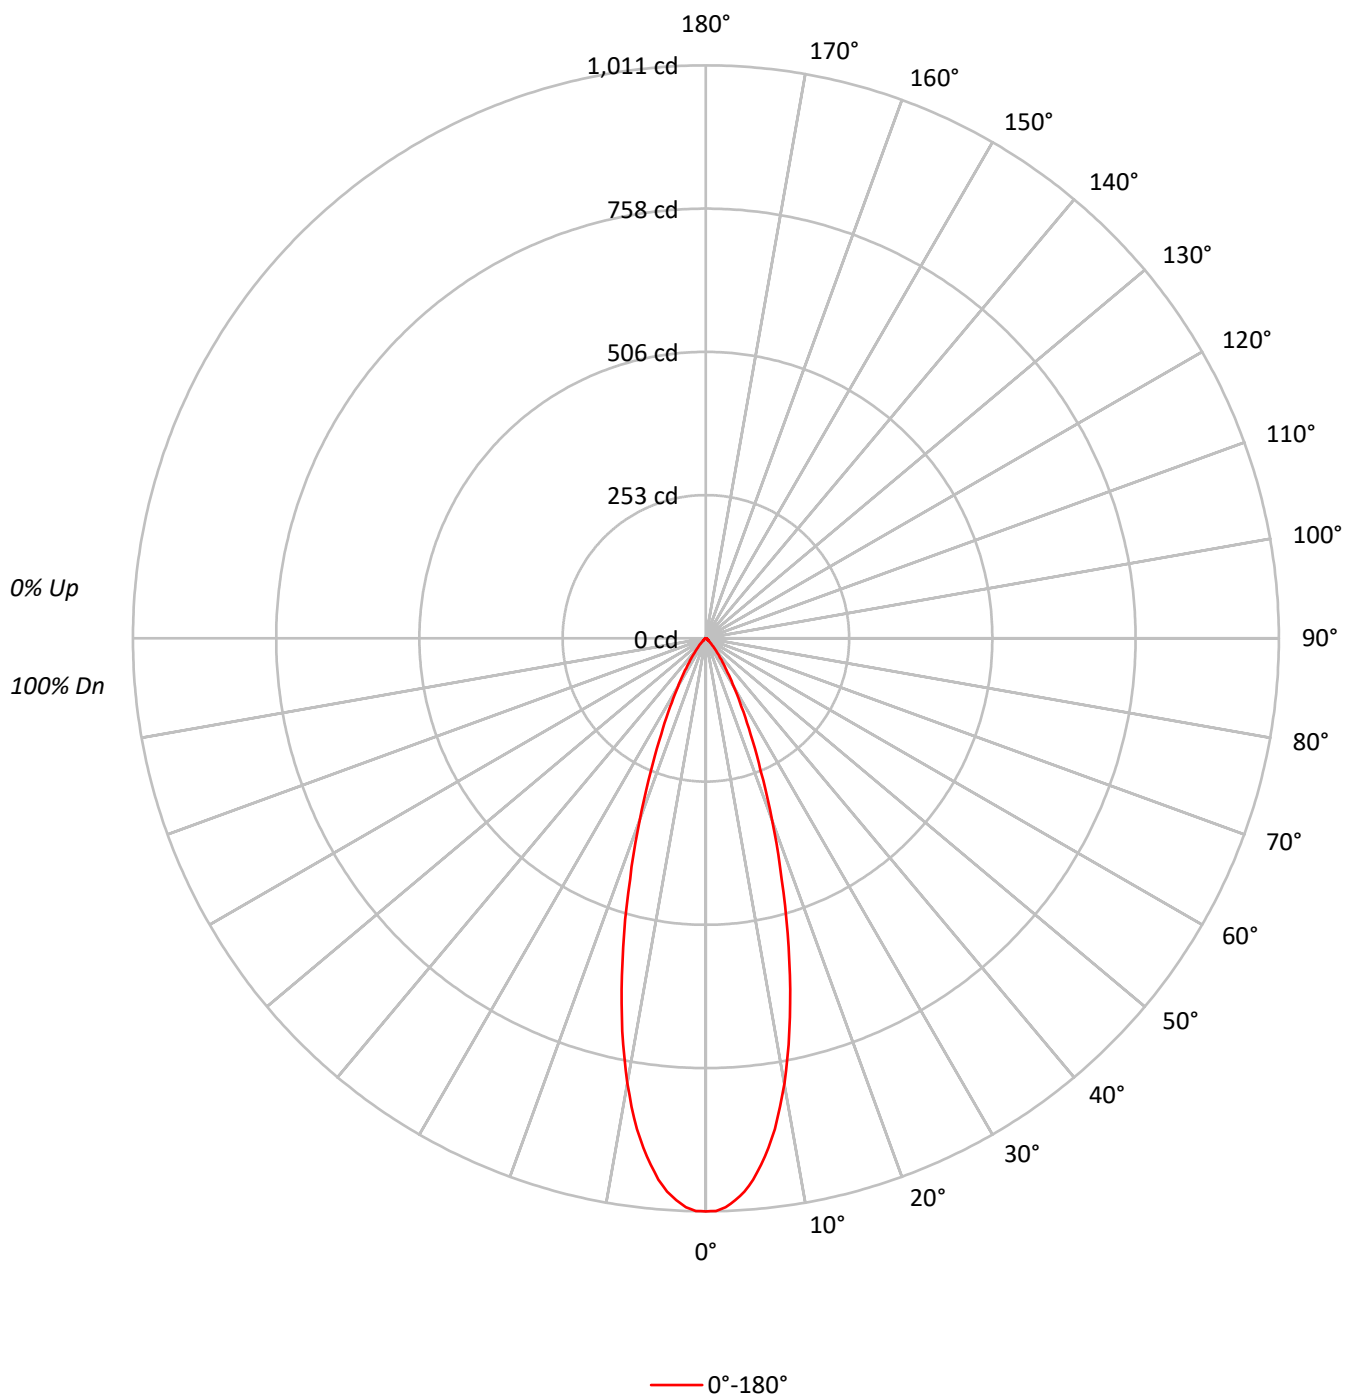

TEST NUMBER: P1288777

CATALOG NUMBER: P3AS05R30W2N902750DE010 E3DL1MW_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20				20				20
RC	80				70				50				30				10				0				0				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	98	97	95	94	93	92	90	88	85	82
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	94	93	92	90	88	85	82	79	76	73	71
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	88	85	82	79	76	73	71	69	66	63	60
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	84	82	80	78	76	73	71	69	66	63	60
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	80	78	76	73	71	69	66	63	60	57	54
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	76	73	71	69	66	63	60	57	54	51	48
6	94	86	81	78	92	85	81	77	84	80	77	83	79	76	81	78	76	75	73	71	69	66	63	60	57	54	51	48	45
7	90	82	77	74	89	82	77	74	81	76	73	80	76	73	79	75	73	72	70	69	66	63	60	57	54	51	48	45	42
8	87	79	74	71	86	79	74	71	78	73	70	77	73	70	76	72	70	69	67	66	63	60	57	54	51	48	45	42	39
9	84	76	71	68	83	75	71	68	75	70	67	74	70	67	73	70	67	66	64	63	60	57	54	51	48	45	42	39	36
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	71	67	65	64	62	61	58	55	52	49	46	43	40	37	34

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	221737
5°	211049
10°	177530
15°	128014
20°	79410
25°	45172
30°	25092
35°	13652
40°	7185
45°	3907
50°	2081
55°	1376
60°	1272
65°	1297
70°	1154
75°	932
80°	884
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3907 cd/sqm

TEST NUMBER: P1288777

CATALOG NUMBER: P3AS05R30W2N902750DE010 E3DL1MW_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.3	22.7
10°-20°	153.5	40.4
20°-30°	88.7	23.3
30°-40°	33.7	8.9
40°-50°	10.3	2.7
50°-60°	3.5	0.9
60°-70°	2.4	0.6
70°-80°	1.3	0.3
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	328.5	86.4
0°-40°	362.2	95.3
0°-60°	376.0	98.9
0°-90°	380.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	380.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1011	
5°	959	86
15°	564	153
25°	187	89
35°	51	34
45°	13	10
55°	4	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1288777

CATALOG NUMBER: P3AS05R30W2N902750DE010 E3DL1MW_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1011.2
1°	1010.5
2°	1004.4
3°	992.9
4°	978.6
5°	958.8
6°	933.7
7°	905.7
8°	874.5
9°	837.1
10°	797.3
11°	754.2
12°	708.6
13°	660.9
14°	612.4
15°	563.9
17.5°	444.8
20°	340.3
22.5°	252.4
25°	186.7
27.5°	135.7
30°	99.1
32.5°	71.4
35°	51.0
37.5°	35.5
40°	25.1
42.5°	17.6
45°	12.6
47.5°	8.6
50°	6.1
52.5°	4.3
55°	3.6
57.5°	3.2
60°	2.9
62.5°	2.5
65°	2.5
67.5°	2.2
70°	1.8
72.5°	1.4
75°	1.1
77.5°	1.1
80°	0.7
82.5°	0.7
85°	0.4
87.5°	0.0



TEST NUMBER: P1288777

CATALOG NUMBER: P3AS05R30W2N902750DE010 E3DL1MW_2700K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)