

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1289065

Luminaire Tested: P3AS05R35W2N902750DE010 E3CB1MMS_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1289065
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-20)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R35W2N902750DE010 E3CB1MMS_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,
E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 502.0 lumens
Efficiency: N/A
Efficacy: 85.1 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.52
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1289065

CATALOG NUMBER: P3AS05R35W2N902750DE010 E3CB1MMS_3000K

Luminous Intensity Polar Plot

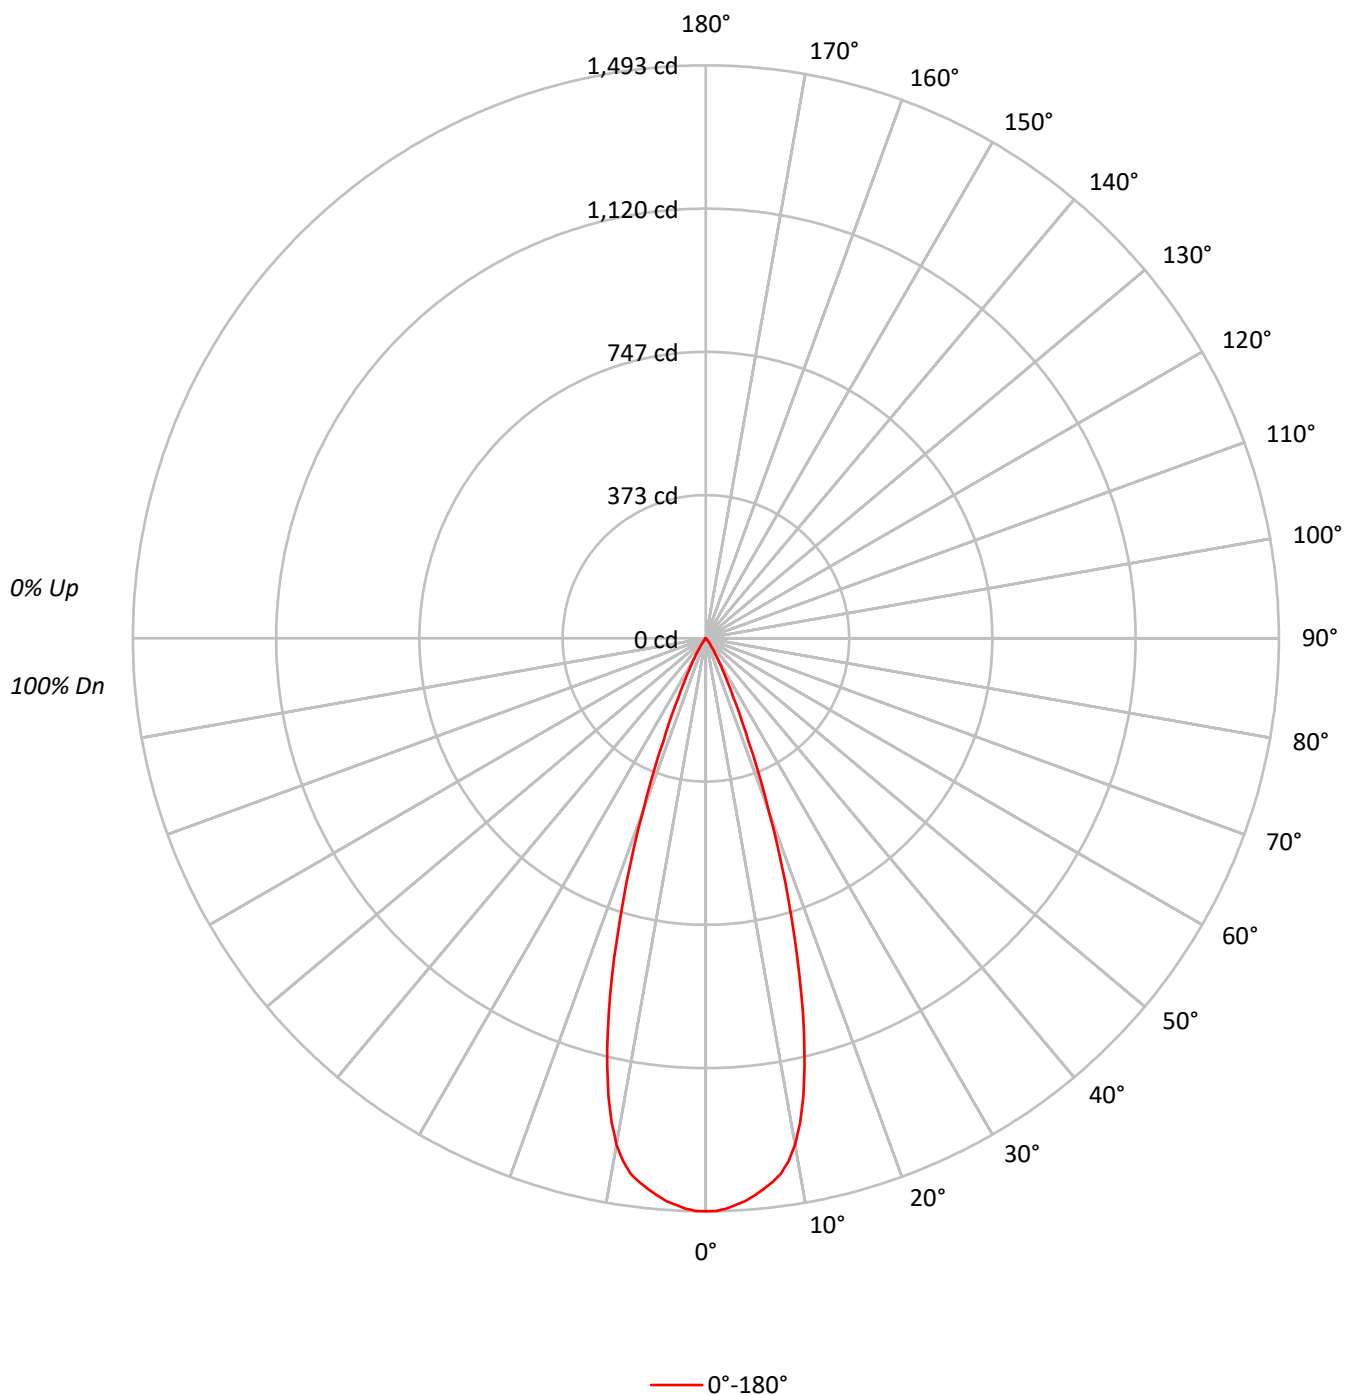

TEST NUMBER: P1289065

CATALOG NUMBER: P3AS05R35W2N902750DE010 E3CB1MMS_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20				20				20
RC	80				70				50				30				10				0				0				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	102	102	102	102	102	102	102	102	102	102	102	100
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	98	98	98	98	98	98	98	98	98	98	98	96
2	111	107	104	101	109	105	103	100	102	100	98	99	98	96	97	95	94	94	94	94	94	94	94	94	94	94	94	94	93
3	107	102	98	95	105	101	97	95	98	96	93	96	94	92	94	92	90	94	92	90	94	92	90	94	92	90	94	92	89
4	104	98	94	91	102	97	93	90	95	92	89	93	90	88	91	89	87	91	89	87	91	89	87	91	89	87	91	89	86
5	100	94	90	87	99	93	89	86	92	88	86	90	87	85	89	86	84	89	86	84	89	86	84	89	86	84	89	86	83
6	97	91	86	83	96	90	86	83	89	85	82	87	84	82	86	83	81	86	83	81	86	83	81	86	83	81	86	83	80
7	94	87	83	80	93	87	83	80	86	82	79	85	81	79	84	81	79	84	81	79	84	81	79	84	81	79	84	81	77
8	91	84	80	77	90	84	80	77	83	79	77	82	79	76	81	78	76	81	78	76	81	78	76	81	78	76	81	78	75
9	89	82	77	74	88	81	77	74	80	77	74	80	76	74	79	76	74	79	76	74	79	76	74	79	76	74	79	76	73
10	86	79	75	72	85	79	75	72	78	74	72	77	74	72	77	74	71	77	74	71	77	74	71	77	74	71	77	74	70

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	327342
5°	320668
10°	298324
15°	218707
20°	111986
25°	40357
30°	15724
35°	5514
40°	2261
45°	620
50°	546
55°	612
60°	526
65°	415
70°	513
75°	678
80°	505
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 75°

Luminance: 678 cd/sqm

TEST NUMBER: P1289065

CATALOG NUMBER: P3AS05R35W2N902750DE010 E3CB1MMS_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	135.8	27.1
10°-20°	254.8	50.8
20°-30°	90.2	18.0
30°-40°	15.8	3.1
40°-50°	2.3	0.5
50°-60°	1.3	0.3
60°-70°	0.9	0.2
70°-80°	0.7	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	480.8	95.8
0°-40°	496.6	98.9
0°-60°	500.3	99.6
0°-90°	502.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	502.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1493	
5°	1457	136
15°	963	255
25°	167	90
35°	21	16
45°	2	2
55°	2	1
65°	1	1
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1289065

CATALOG NUMBER: P3AS05R35W2N902750DE010 E3CB1MMS_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	1492.8
1°	1492.4
2°	1487.6
3°	1478.5
4°	1470.2
5°	1456.8
6°	1443.0
7°	1427.5
8°	1408.6
9°	1378.9
10°	1339.8
11°	1285.6
12°	1220.4
13°	1142.9
14°	1057.5
15°	963.4
17.5°	717.5
20°	479.9
22.5°	289.4
25°	166.8
27.5°	99.6
30°	62.1
32.5°	36.0
35°	20.6
37.5°	13.0
40°	7.9
42.5°	4.0
45°	2.0
47.5°	1.6
50°	1.6
52.5°	1.6
55°	1.6
57.5°	1.2
60°	1.2
62.5°	1.2
65°	0.8
67.5°	0.8
70°	0.8
72.5°	0.8
75°	0.8
77.5°	0.4
80°	0.4
82.5°	0.4
85°	0.0
87.5°	0.0



TEST NUMBER: P1289065

CATALOG NUMBER: P3AS05R35W2N902750DE010 E3CB1MMS_3000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)