

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1289315

Luminaire Tested: P3AS05R35W2N902765DE010 E3DLP1GPH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1289315
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R35W2N902765DE010 E3DLP1GPH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 3500K CCT AND, 90CRI ,
E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 128.0 lumens
Efficiency: N/A
Efficacy: 21.7 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1289315

CATALOG NUMBER: P3AS05R35W2N902765DE010 E3DLP1GPH_3500K

Luminous Intensity Polar Plot

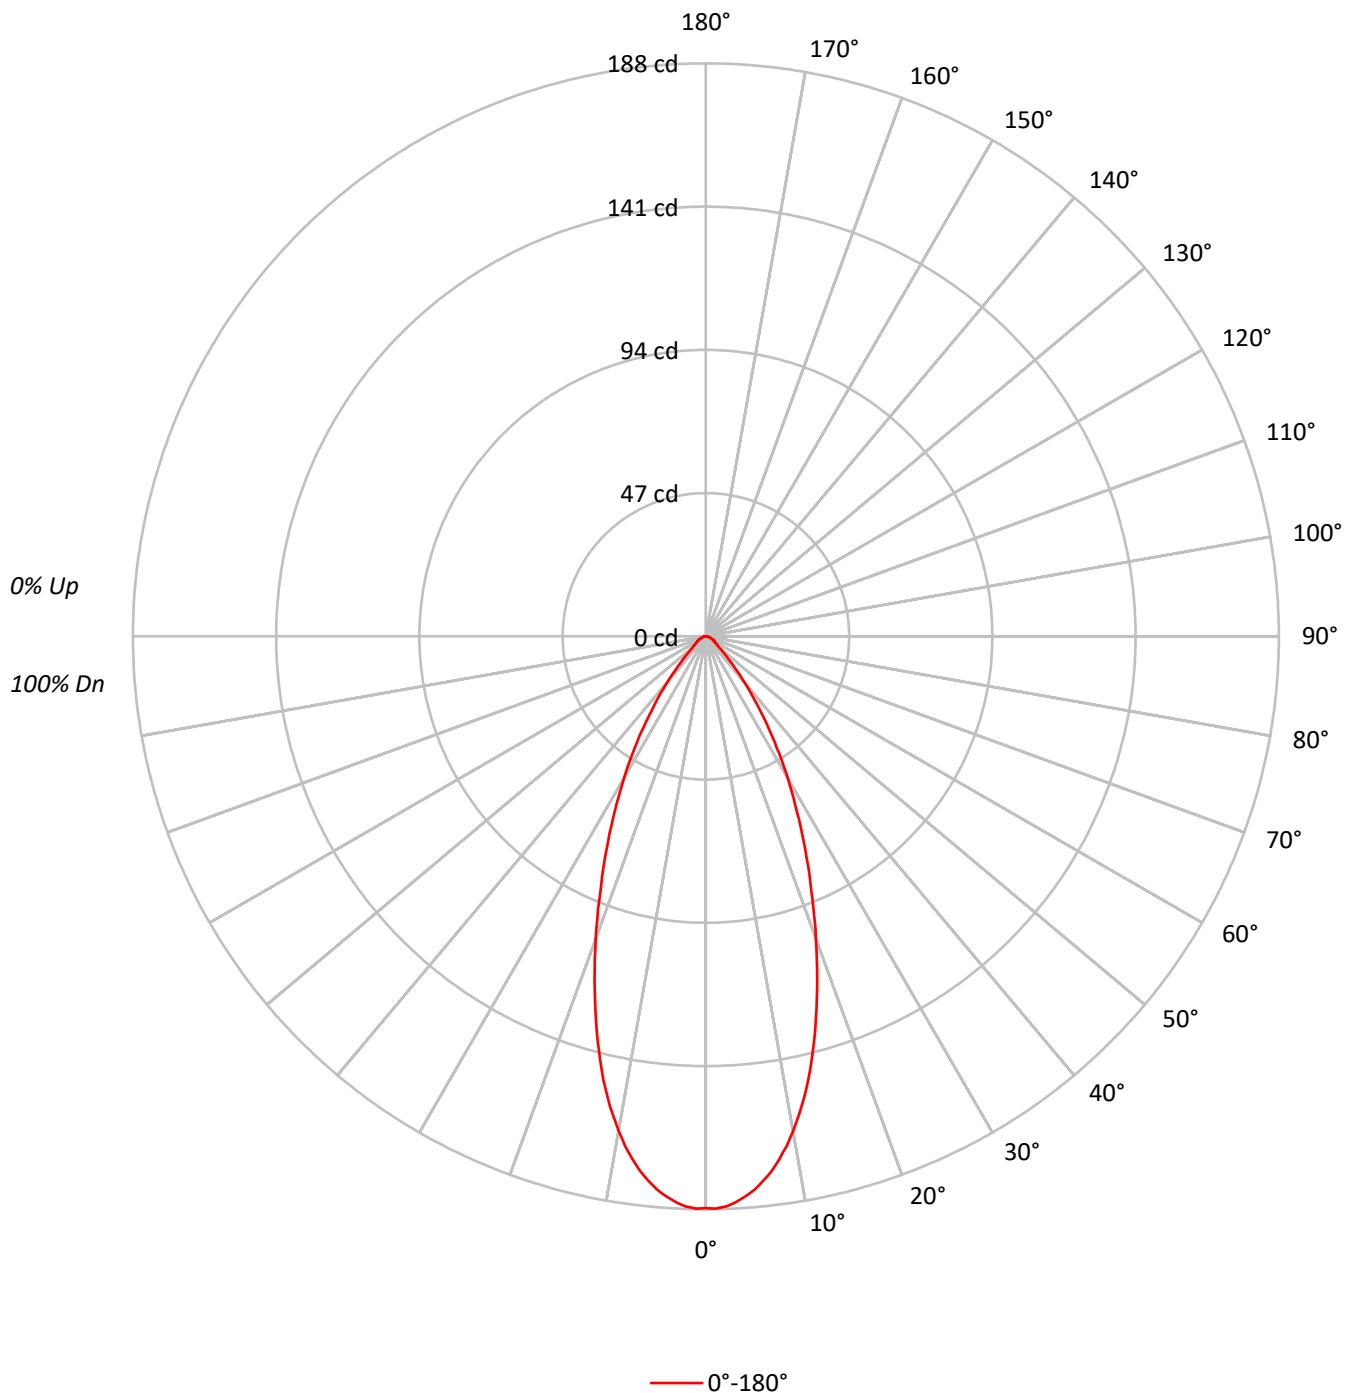

TEST NUMBER: P1289315

CATALOG NUMBER: P3AS05R35W2N902765DE010 E3DLP1GPH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93		
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86		
3	102	95	90	86	100	94	89	85	91	87	84	89	85	82	86	84	81	80		
4	97	89	83	79	95	88	82	78	86	81	77	83	80	76	82	78	76	74		
5	92	83	77	73	90	82	77	73	80	76	72	79	75	71	77	74	71	69		
6	87	78	72	68	86	77	72	68	76	71	67	75	70	67	73	69	66	65		
7	83	74	68	63	82	73	67	63	72	67	63	71	66	63	69	65	62	61		
8	79	70	64	60	78	69	63	59	68	63	59	67	62	59	66	62	59	57		
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	55	54		
10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	56	53	51		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	41137
5°	40128
10°	36695
15°	31147
20°	24642
25°	18654
30°	13572
35°	9182
40°	5639
45°	3225
50°	1944
55°	1567
60°	1403
65°	1245
70°	1026
75°	1017
80°	1010
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3225 cd/sqm

TEST NUMBER: P1289315

CATALOG NUMBER: P3AS05R35W2N902765DE010 E3DLP1GPH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	16.8	13.2
10°-20°	37.8	29.5
20°-30°	35.4	27.6
30°-40°	21.7	16.9
40°-50°	8.5	6.7
50°-60°	3.7	2.9
60°-70°	2.4	1.9
70°-80°	1.3	1.0
80°-90°	0.4	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	90.0	70.3
0°-40°	111.7	87.2
0°-60°	124.0	96.8
0°-90°	128.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	128.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	188	
5°	182	17
15°	137	38
25°	77	35
35°	34	22
45°	10	9
55°	4	4
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1289315

CATALOG NUMBER: P3AS05R35W2N902765DE010 E3DLP1GPH_3500K

CANDELA DISTRIBUTION (FULL):

0°	
0°	187.6
1°	187.8
2°	187.2
3°	186.0
4°	184.3
5°	182.3
6°	179.7
7°	176.8
8°	173.2
9°	169.3
10°	164.8
11°	160.0
12°	154.9
13°	149.4
14°	143.3
15°	137.2
17.5°	121.4
20°	105.6
22.5°	90.5
25°	77.1
27.5°	64.6
30°	53.6
32.5°	43.4
35°	34.3
37.5°	26.2
40°	19.7
42.5°	14.2
45°	10.4
47.5°	7.5
50°	5.7
52.5°	4.7
55°	4.1
57.5°	3.5
60°	3.2
62.5°	2.8
65°	2.4
67.5°	2.0
70°	1.6
72.5°	1.4
75°	1.2
77.5°	1.0
80°	0.8
82.5°	0.6
85°	0.4
87.5°	0.2



TEST NUMBER: P1289315

CATALOG NUMBER: P3AS05R35W2N902765DE010 E3DLP1GPH_3500K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)