

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1289344

Luminaire Tested: P3AS05R35W2N902765DE010 E3DLP1WMH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1289344
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R35W2N902765DE010 E3DLP1WMH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R35 optic, 3000K CCT AND, 90CRI ,
E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 257.0 lumens
Efficiency: N/A
Efficacy: 43.6 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1289344

CATALOG NUMBER: P3AS05R35W2N902765DE010 E3DLP1WMH_3000K

Luminous Intensity Polar Plot

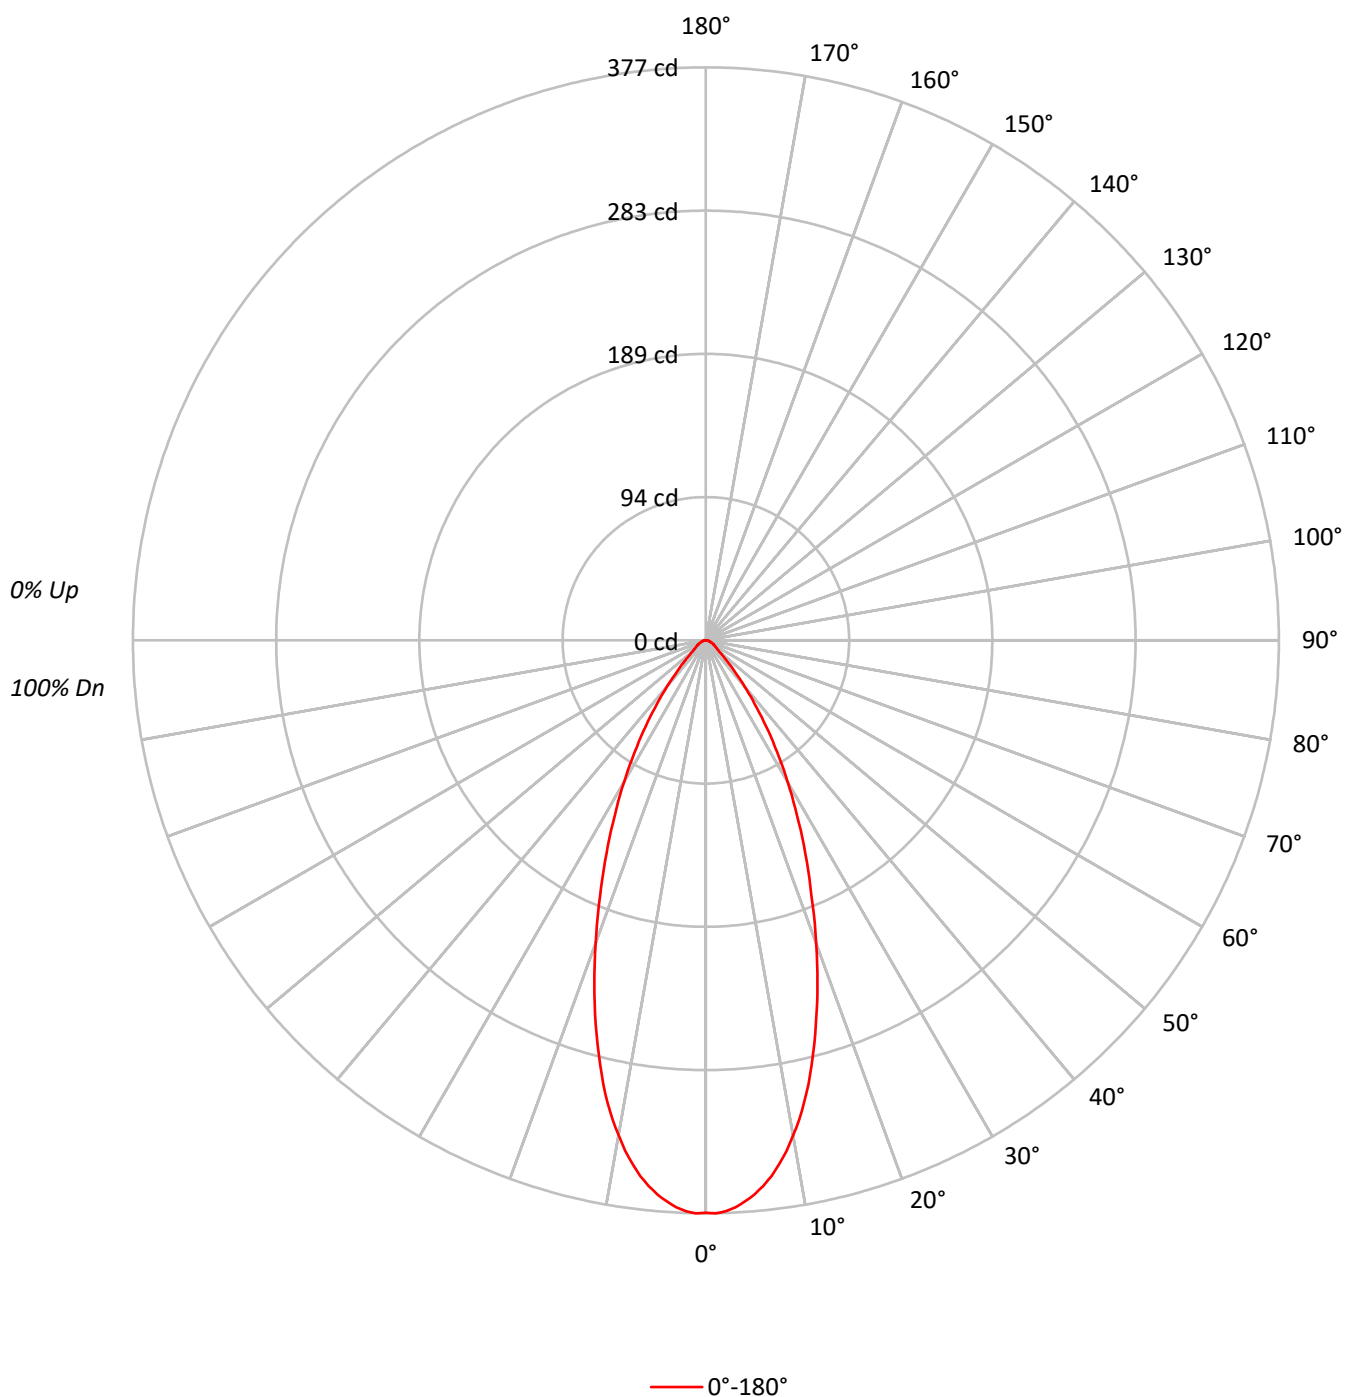

TEST NUMBER: P1289344

CATALOG NUMBER: P3AS05R35W2N902765DE010 E3DLP1WMH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93		
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	91	89	87	86		
3	102	95	90	86	100	94	89	85	91	87	84	89	85	82	86	84	81	80		
4	97	89	83	79	95	88	82	78	86	81	77	84	80	77	82	78	76	74		
5	92	83	77	73	90	82	77	73	81	76	72	79	75	71	77	74	71	69		
6	87	78	72	68	86	77	72	68	76	71	67	75	70	67	73	69	66	65		
7	83	74	68	63	82	73	67	63	72	67	63	71	66	63	69	65	62	61		
8	79	70	64	60	78	69	63	59	68	63	59	67	62	59	66	62	59	57		
9	76	66	60	56	75	66	60	56	65	59	56	64	59	56	63	59	55	54		
10	72	63	57	53	71	62	57	53	61	56	53	61	56	53	60	56	53	51		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	82603
5°	80563
10°	73657
15°	62520
20°	49494
25°	37430
30°	27245
35°	18444
40°	11336
45°	6512
50°	3923
55°	3173
60°	2763
65°	2439
70°	2052
75°	2033
80°	2020
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 6512 cd/sqm

TEST NUMBER: P1289344

CATALOG NUMBER: P3AS05R35W2N902765DE010 E3DLP1WMH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.8	13.2
10°-20°	75.9	29.5
20°-30°	71.0	27.6
30°-40°	43.5	16.9
40°-50°	17.1	6.7
50°-60°	7.5	2.9
60°-70°	4.7	1.8
70°-80°	2.5	1.0
80°-90°	0.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	180.8	70.3
0°-40°	224.3	87.3
0°-60°	248.9	96.9
0°-90°	257.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	257.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	377	
5°	366	34
15°	275	76
25°	155	71
35°	69	43
45°	21	17
55°	8	8
65°	5	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1289344

CATALOG NUMBER: P3AS05R35W2N902765DE010 E3DLP1WMH_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	376.7
1°	377.1
2°	375.9
3°	373.6
4°	370.0
5°	366.0
6°	360.9
7°	355.0
8°	347.8
9°	339.9
10°	330.8
11°	321.3
12°	311.0
13°	299.9
14°	287.7
15°	275.4
17.5°	243.8
20°	212.1
22.5°	181.6
25°	154.7
27.5°	129.8
30°	107.6
32.5°	87.1
35°	68.9
37.5°	52.6
40°	39.6
42.5°	28.5
45°	21.0
47.5°	15.0
50°	11.5
52.5°	9.5
55°	8.3
57.5°	7.1
60°	6.3
62.5°	5.5
65°	4.7
67.5°	4.0
70°	3.2
72.5°	2.8
75°	2.4
77.5°	2.0
80°	1.6
82.5°	1.2
85°	0.8
87.5°	0.4



TEST NUMBER: P1289344

CATALOG NUMBER: P3AS05R35W2N902765DE010 E3DLP1WMH_3000K

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)