

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1289437

Luminaire Tested: P3AS05R40W2N902750DE010 E3DL1MW_2700K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1289437
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R40W2N902750DE010 E3DL1MW_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 2700K CCT AND, 90CRI ,
E3DL1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 418.0 lumens
Efficiency: N/A
Efficacy: 70.9 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1289437

CATALOG NUMBER: P3AS05R40W2N902750DE010 E3DL1MW_2700K

Luminous Intensity Polar Plot

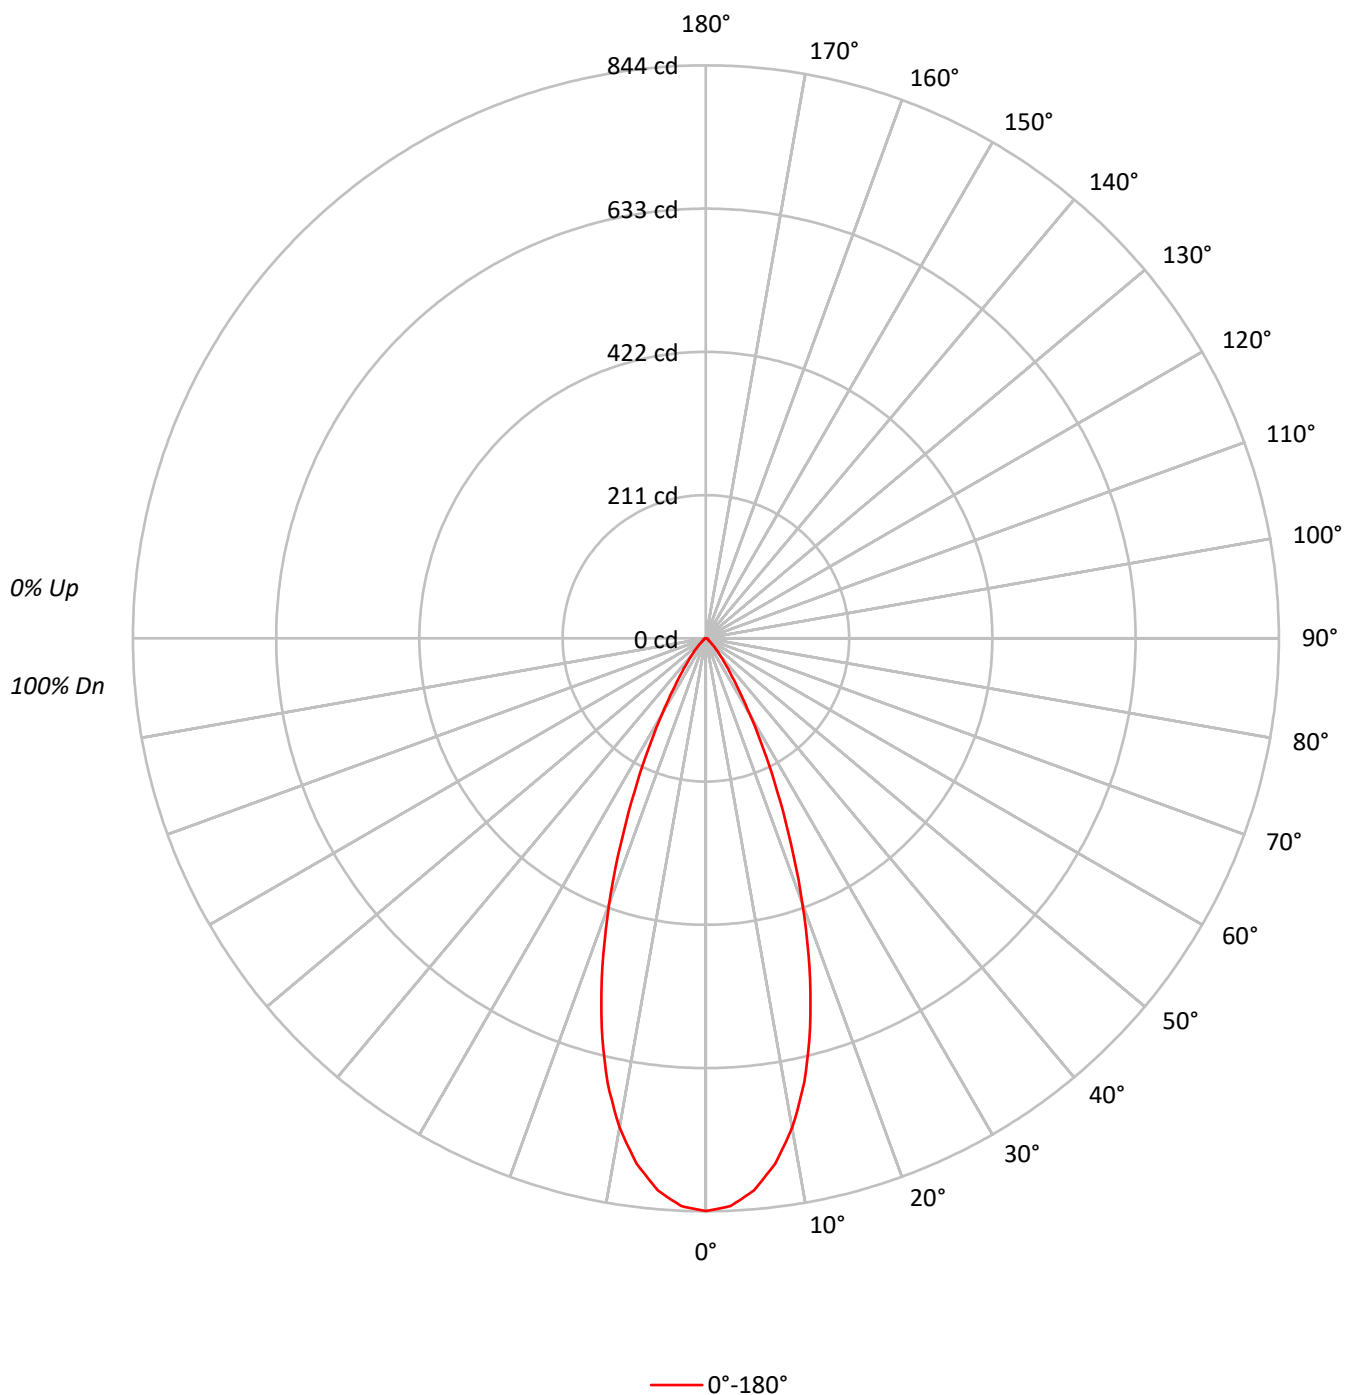



TEST NUMBER: P1289437

CATALOG NUMBER: P3AS05R40W2N902750DE010 E3DL1MW_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10		0			
RCR																										
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100			
1	114	111	109	107		112	109	107	105		105	104	102		102	100	99		98	97	96		94			
2	109	105	101	98		107	103	100	97		100	97	95		97	95	93		94	92	91		89			
3	104	99	94	91		102	97	93	90		95	91	88		92	89	87		90	88	86		84			
4	100	93	88	85		98	92	88	84		90	86	83		88	85	82		86	84	81		80			
5	96	88	83	79		94	88	83	79		86	82	78		84	81	78		83	80	77		76			
6	92	84	79	75		91	83	78	75		82	78	74		81	77	74		79	76	73		72			
7	88	80	75	71		87	79	74	71		78	74	71		77	73	70		76	73	70		69			
8	85	76	71	68		84	76	71	67		75	70	67		74	70	67		73	69	67		65			
9	82	73	68	64		81	73	68	64		72	67	64		71	67	64		70	66	64		63			
10	78	70	65	62		78	70	65	61		69	64	61		68	64	61		67	64	61		60			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	184963
5°	179595
10°	162967
15°	134643
20°	97122
25°	60076
30°	32511
35°	16811
40°	9131
45°	5117
50°	2559
55°	1912
60°	1710
65°	1660
70°	1603
75°	1525
80°	1389
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5117 cd/sqm

TEST NUMBER: P1289437

CATALOG NUMBER: P3AS05R40W2N902750DE010 E3DL1MW_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.2	18.0
10°-20°	161.5	38.6
20°-30°	115.2	27.6
30°-40°	42.4	10.2
40°-50°	13.4	3.2
50°-60°	4.6	1.1
60°-70°	3.2	0.8
70°-80°	1.9	0.5
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	351.9	84.2
0°-40°	394.4	94.3
0°-60°	412.4	98.6
0°-90°	418.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	418.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	844	
5°	816	75
15°	593	161
25°	248	115
35°	63	42
45°	16	13
55°	5	5
65°	3	3
75°	2	2
85°	0	1
90°	0	

TEST NUMBER: P1289437

CATALOG NUMBER: P3AS05R40W2N902750DE010 E3DL1MW_2700K

CANDELA DISTRIBUTION (FULL):

	0°
0°	843.5
2.5°	837.0
5°	815.9
7.5°	780.7
10°	731.9
12.5°	669.8
15°	593.1
17.5°	507.0
20°	416.2
22.5°	326.8
25°	248.3
27.5°	182.3
30°	128.4
32.5°	90.1
35°	62.8
37.5°	44.5
40°	31.9
42.5°	23.0
45°	16.5
47.5°	11.1
50°	7.5
52.5°	5.4
55°	5.0
57.5°	4.7
60°	3.9
62.5°	3.6
65°	3.2
67.5°	2.9
70°	2.5
72.5°	2.2
75°	1.8
77.5°	1.4
80°	1.1
82.5°	0.7
85°	0.4
87.5°	0.4
90°	0.0

(END OF REPORT)