

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1289438

Luminaire Tested: P3AS05R40W2N902750DE010 E3DL1MW_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1289438
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R40W2N902750DE010 E3DL1MW_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 3000K CCT AND, 90CRI ,
E3DL1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 461.0 lumens
Efficiency: N/A
Efficacy: 78.1 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1289438
CATALOG NUMBER: P3AS05R40W2N902750DE010 E3DL1MW_3000K

Luminous Intensity Polar Plot

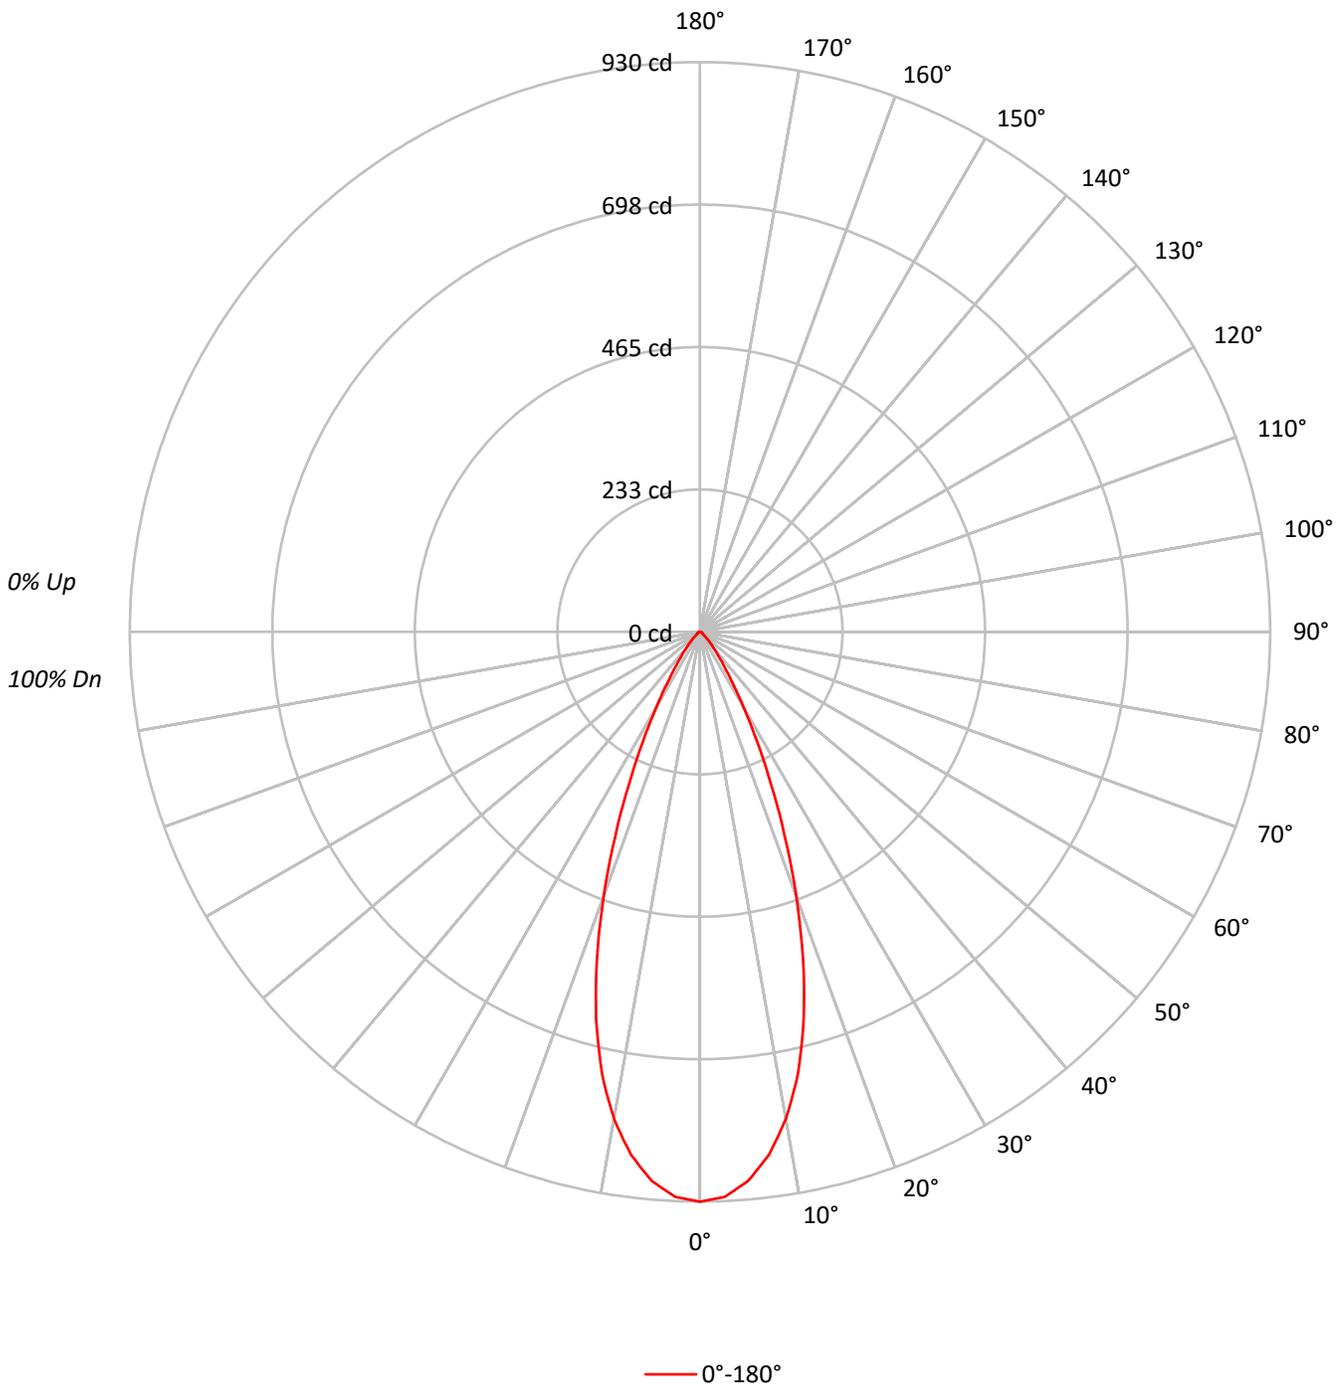



TEST NUMBER: P1289438

CATALOG NUMBER: P3AS05R40W2N902750DE010 E3DL1MW_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	82.9	18.0
10°-20°	178.1	38.6
20°-30°	127.1	27.6
30°-40°	46.8	10.1
40°-50°	14.7	3.2
50°-60°	5.1	1.1
60°-70°	3.6	0.8
70°-80°	2.1	0.5
80°-90°	0.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	388.2	84.2
0°-40°	434.9	94.3
0°-60°	454.8	98.6
0°-90°	461.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	461.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	930	
5°	900	83
15°	654	178
25°	274	127
35°	69	47
45°	18	15
55°	6	5
65°	4	4
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P1289438
CATALOG NUMBER: P3AS05R40W2N902750DE010 E3DL1MW_3000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	930.3
2.5°	923.1
5°	899.8
7.5°	861.0
10°	807.2
12.5°	738.8
15°	654.1
17.5°	559.1
20°	459.0
22.5°	360.5
25°	273.8
27.5°	201.0
30°	141.7
32.5°	99.3
35°	69.2
37.5°	49.1
40°	35.2
42.5°	25.3
45°	18.2
47.5°	12.3
50°	8.3
52.5°	5.9
55°	5.5
57.5°	5.1
60°	4.4
62.5°	4.0
65°	3.6
67.5°	3.2
70°	2.8
72.5°	2.4
75°	2.0
77.5°	1.6
80°	1.2
82.5°	0.8
85°	0.4
87.5°	0.4
90°	0.0

(END OF REPORT)