

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1289508

Luminaire Tested: P3AS05R40W2N902750DE010 E3DLP1WMH_3000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1289508
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-21)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R40W2N902750DE010 E3DLP1WMH_3000K
Description: 3in Adjustable Tunable White LED luminaire with, R40 optic, 3000K CCT AND, 90CRI ,
E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 291.1 lumens
Efficiency: N/A
Efficacy: 49.3 lumens/watt
Spacing Criteria (0/90/45): 0.73 / 0.73 / 0.74
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1289508

CATALOG NUMBER: P3AS05R40W2N902750DE010 E3DLP1WMH_3000K

Luminous Intensity Polar Plot

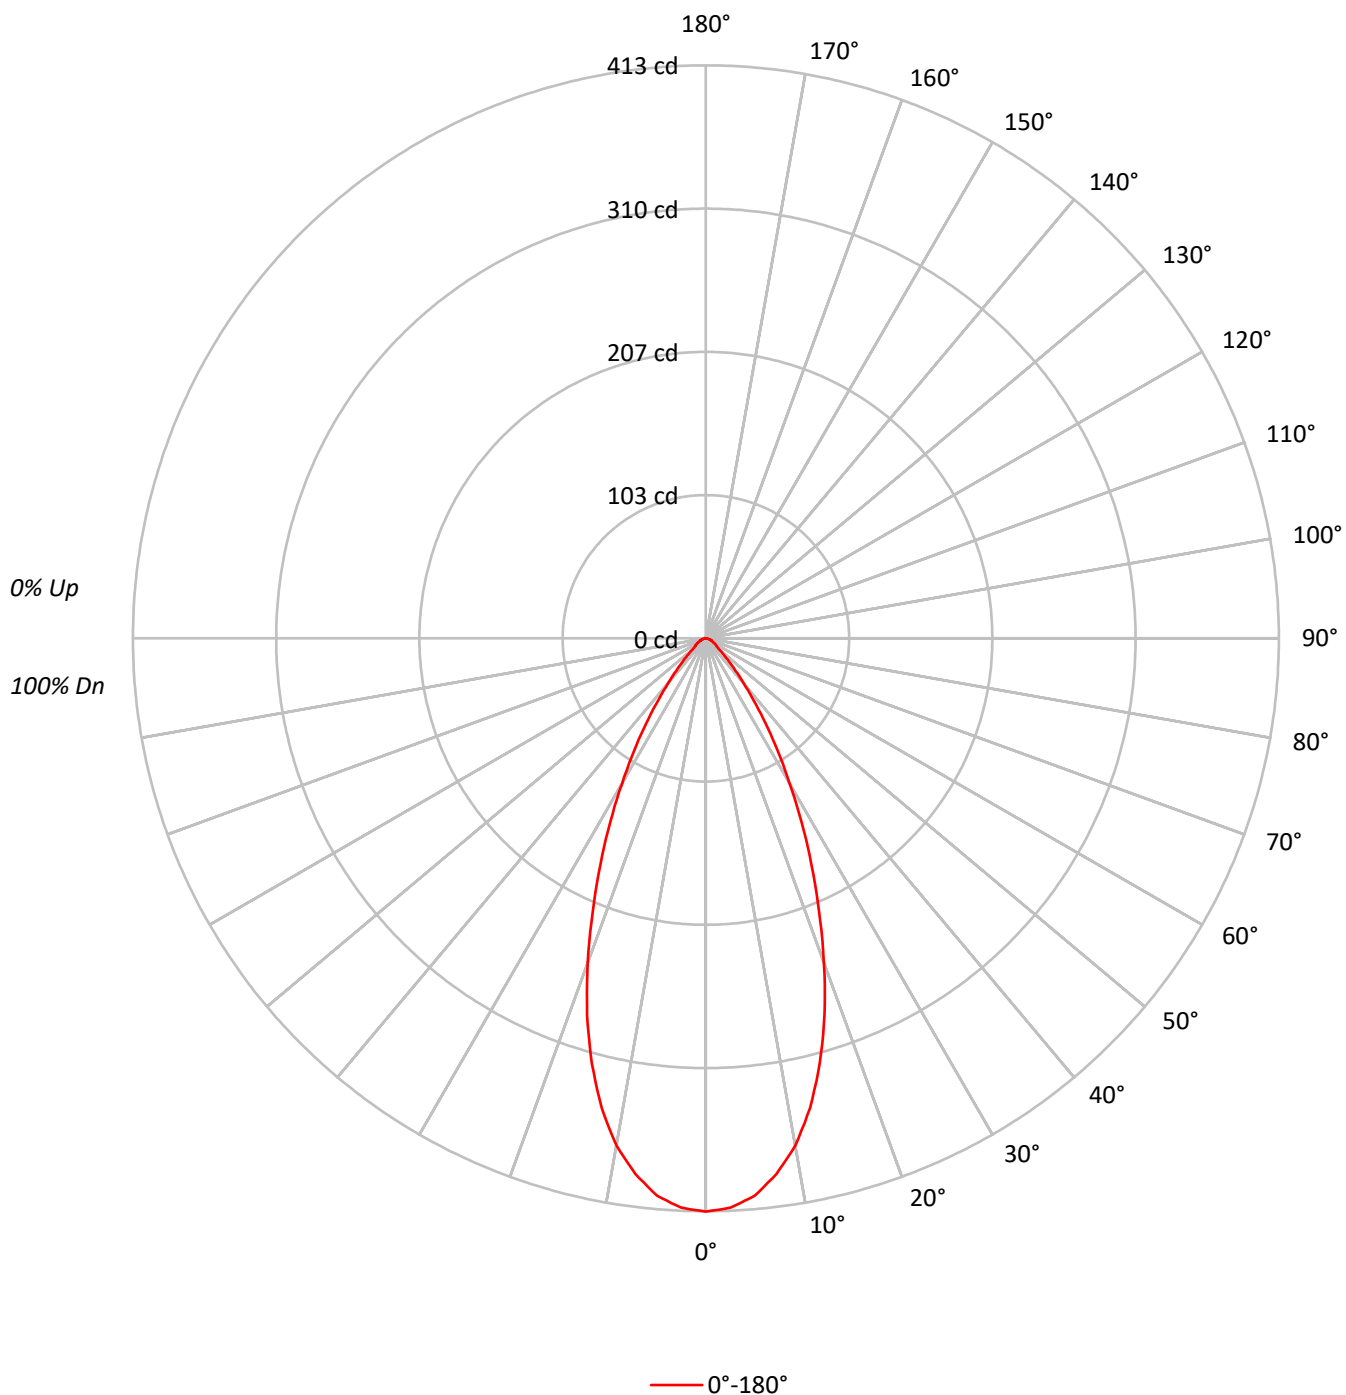

TEST NUMBER: P1289508

CATALOG NUMBER: P3AS05R40W2N902750DE010 E3DLP1WMH_3000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10			0
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97	96	95	93
2	107	102	98	95	105	101	97	93	97	94	91		94	92	89		92	89	88	86
3	102	95	90	86	100	94	89	85	91	87	84		89	85	83		86	84	81	80
4	97	89	83	79	95	88	83	79	86	81	78		84	80	77		82	79	76	74
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77	74	71	69
6	87	78	72	68	86	78	72	68	76	71	67		75	70	67		73	69	66	65
7	83	74	68	64	82	73	68	63	72	67	63		71	66	63		70	66	62	61
8	79	70	64	60	78	69	64	60	68	63	59		67	63	59		66	62	59	58
9	76	66	60	56	75	66	60	56	65	60	56		64	59	56		63	59	56	54
10	72	63	57	53	71	62	57	53	62	57	53		61	56	53		60	56	53	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	90607
5°	88774
10°	82653
15°	72032
20°	58058
25°	43527
30°	30587
35°	20050
40°	12137
45°	7257
50°	4332
55°	3479
60°	3114
65°	2698
70°	2565
75°	2033
80°	2020
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 7257 cd/sqm

TEST NUMBER: P1289508

CATALOG NUMBER: P3AS05R40W2N902750DE010 E3DLP1WMH_3000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.4	12.9
10°-20°	87.4	30.0
20°-30°	82.4	28.3
30°-40°	47.6	16.4
40°-50°	19.0	6.5
50°-60°	8.4	2.9
60°-70°	5.2	1.8
70°-80°	2.7	0.9
80°-90°	0.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	207.2	71.2
0°-40°	254.9	87.6
0°-60°	282.2	97.0
0°-90°	291.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	291.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	413	
5°	403	37
15°	317	87
25°	180	82
35°	75	48
45°	23	19
55°	9	8
65°	5	5
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1289508

CATALOG NUMBER: P3AS05R40W2N902750DE010 E3DLP1WMH_3000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	413.2
2.5°	410.8
5°	403.3
7.5°	389.4
10°	371.2
12.5°	346.7
15°	317.3
17.5°	284.5
20°	248.8
22.5°	213.1
25°	179.9
27.5°	149.0
30°	120.8
32.5°	96.3
35°	74.9
37.5°	56.7
40°	42.4
42.5°	31.7
45°	23.4
47.5°	17.0
50°	12.7
52.5°	10.3
55°	9.1
57.5°	8.3
60°	7.1
62.5°	5.9
65°	5.2
67.5°	4.4
70°	4.0
72.5°	3.2
75°	2.4
77.5°	2.0
80°	1.6
82.5°	1.2
85°	0.8
87.5°	0.4
90°	0.0

(END OF REPORT)