

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1290020

Luminaire Tested: P3AS05R50W2N902750DE010 E3DL1GPH_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1290020
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R50W2N902750DE010 E3DL1GPH_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R50 optic, 5000K CCT AND, 90CRI ,
E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 220.0 lumens
Efficiency: N/A
Efficacy: 37.3 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1290020

CATALOG NUMBER: P3AS05R50W2N902750DE010 E3DL1GPH_5000K

Luminous Intensity Polar Plot

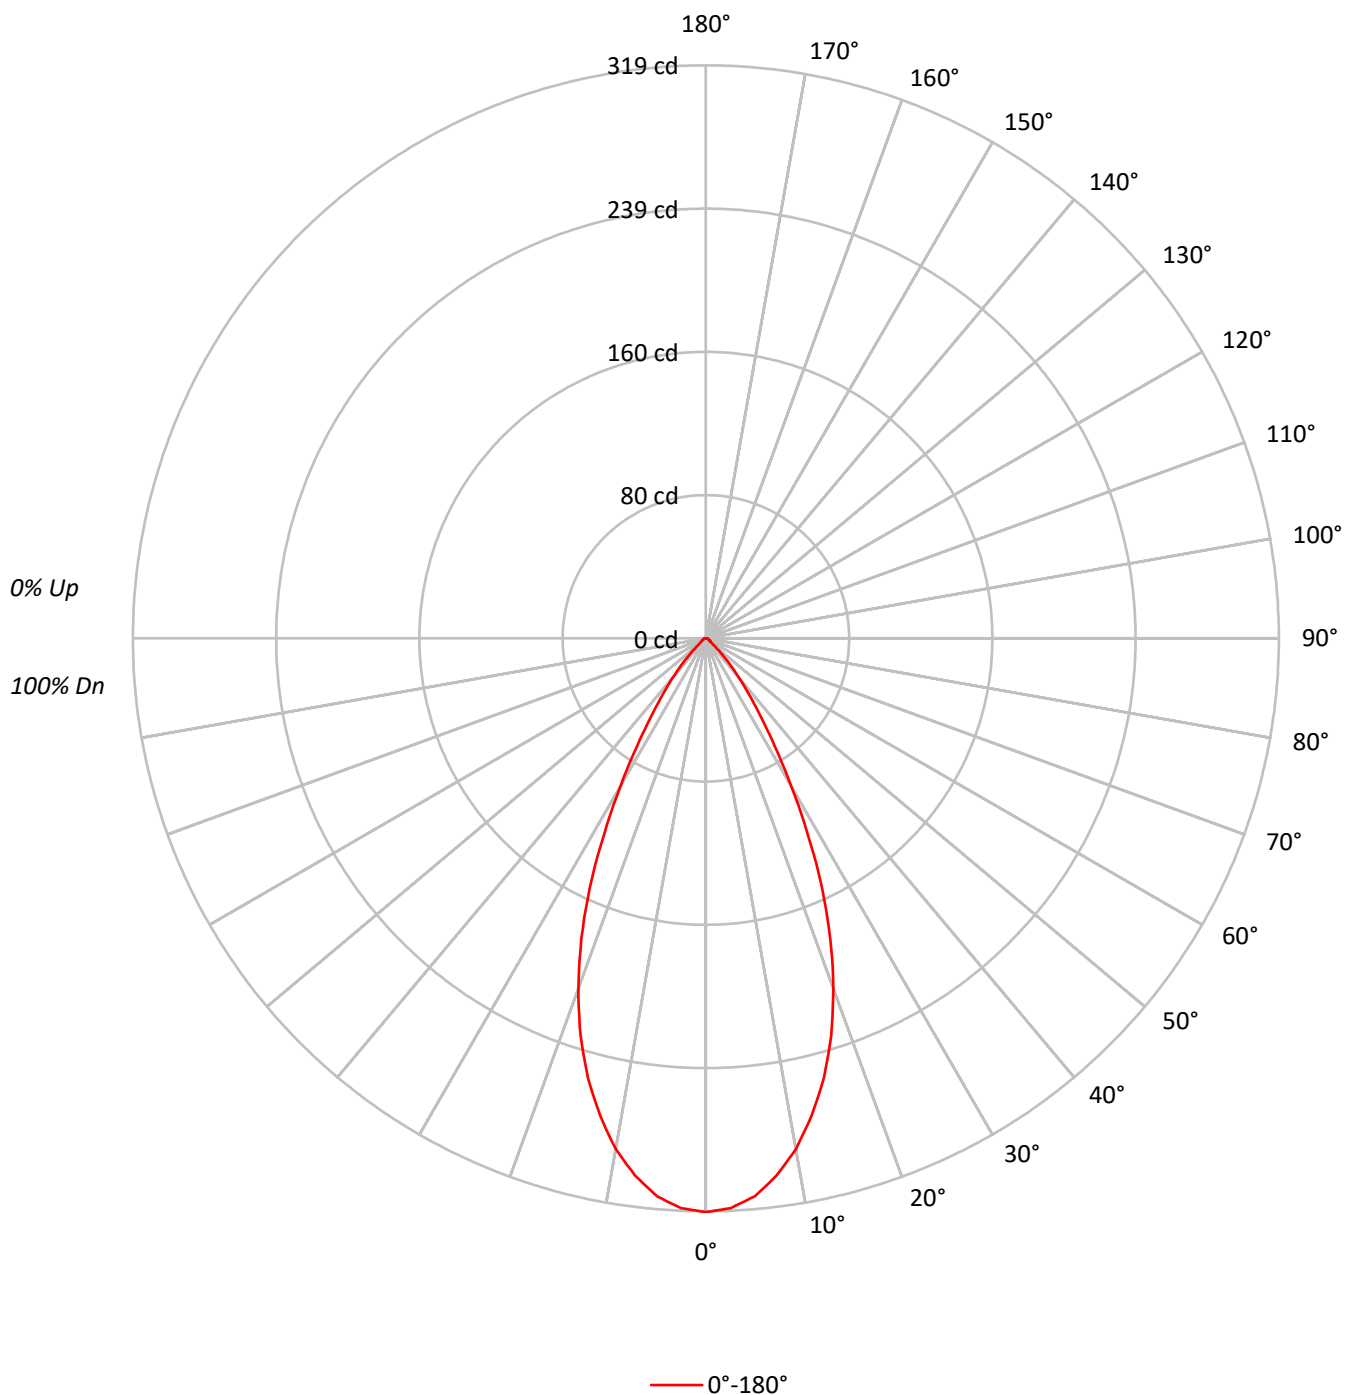

TEST NUMBER: P1290020

CATALOG NUMBER: P3AS05R50W2N902750DE010 E3DL1GPH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94		
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87		
3	103	97	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	82		
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	80	78	76		
5	93	85	80	75	92	84	79	75	83	78	74	81	77	74	79	76	73	72		
6	89	80	75	71	88	80	74	70	78	73	70	77	73	69	75	72	69	67		
7	85	76	70	66	84	75	70	66	74	69	66	73	69	65	72	68	65	64		
8	81	72	66	62	80	71	66	62	70	65	62	69	65	62	68	64	61	60		
9	78	68	63	59	76	68	62	59	67	62	59	66	62	58	65	61	58	57		
10	74	65	59	56	73	65	59	56	64	59	55	63	58	55	62	58	55	54		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	70038
5°	68633
10°	64283
15°	57549
20°	48421
25°	36970
30°	24029
35°	14241
40°	8244
45°	4124
50°	1535
55°	1185
60°	1096
65°	1038
70°	1026
75°	1017
80°	1010
85°	1006

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 4124 cd/sqm

TEST NUMBER: P1290020

CATALOG NUMBER: P3AS05R50W2N902750DE010 E3DL1GPH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	29.0	13.2
10°-20°	70.1	31.9
20°-30°	68.8	31.3
30°-40°	34.7	15.8
40°-50°	10.9	5.0
50°-60°	2.8	1.3
60°-70°	2.0	0.9
70°-80°	1.3	0.6
80°-90°	0.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	167.9	76.3
0°-40°	202.5	92.1
0°-60°	216.3	98.3
0°-90°	220.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	220.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	319	
5°	312	29
15°	254	70
25°	153	69
35°	53	35
45°	13	11
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1290020

CATALOG NUMBER: P3AS05R50W2N902750DE010 E3DL1GPH_5000K

CANDELA DISTRIBUTION (FULL):

0°	
0°	319.4
2.5°	317.5
5°	311.8
7.5°	301.6
10°	288.7
12.5°	272.1
15°	253.5
17.5°	232.0
20°	207.5
22.5°	181.1
25°	152.8
27.5°	122.6
30°	94.9
32.5°	71.4
35°	53.2
37.5°	39.3
40°	28.8
42.5°	20.3
45°	13.3
47.5°	7.6
50°	4.5
52.5°	3.3
55°	3.1
57.5°	2.7
60°	2.5
62.5°	2.3
65°	2.0
67.5°	1.8
70°	1.6
72.5°	1.4
75°	1.2
77.5°	1.0
80°	0.8
82.5°	0.6
85°	0.4
87.5°	0.2
90°	0.0

(END OF REPORT)