

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1290330

Luminaire Tested: P3AS05R55W2N902750DE010 E3D1WMH_2700K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1290330
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R55W2N902750DE010 E3D1WMH_2700K
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 2700K CCT AND, 90CRI ,
E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 463.0 lumens
Efficiency: N/A
Efficacy: 78.5 lumens/watt
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.82
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1290330

CATALOG NUMBER: P3AS05R55W2N902750DE010 E3D1WMH_2700K

Luminous Intensity Polar Plot

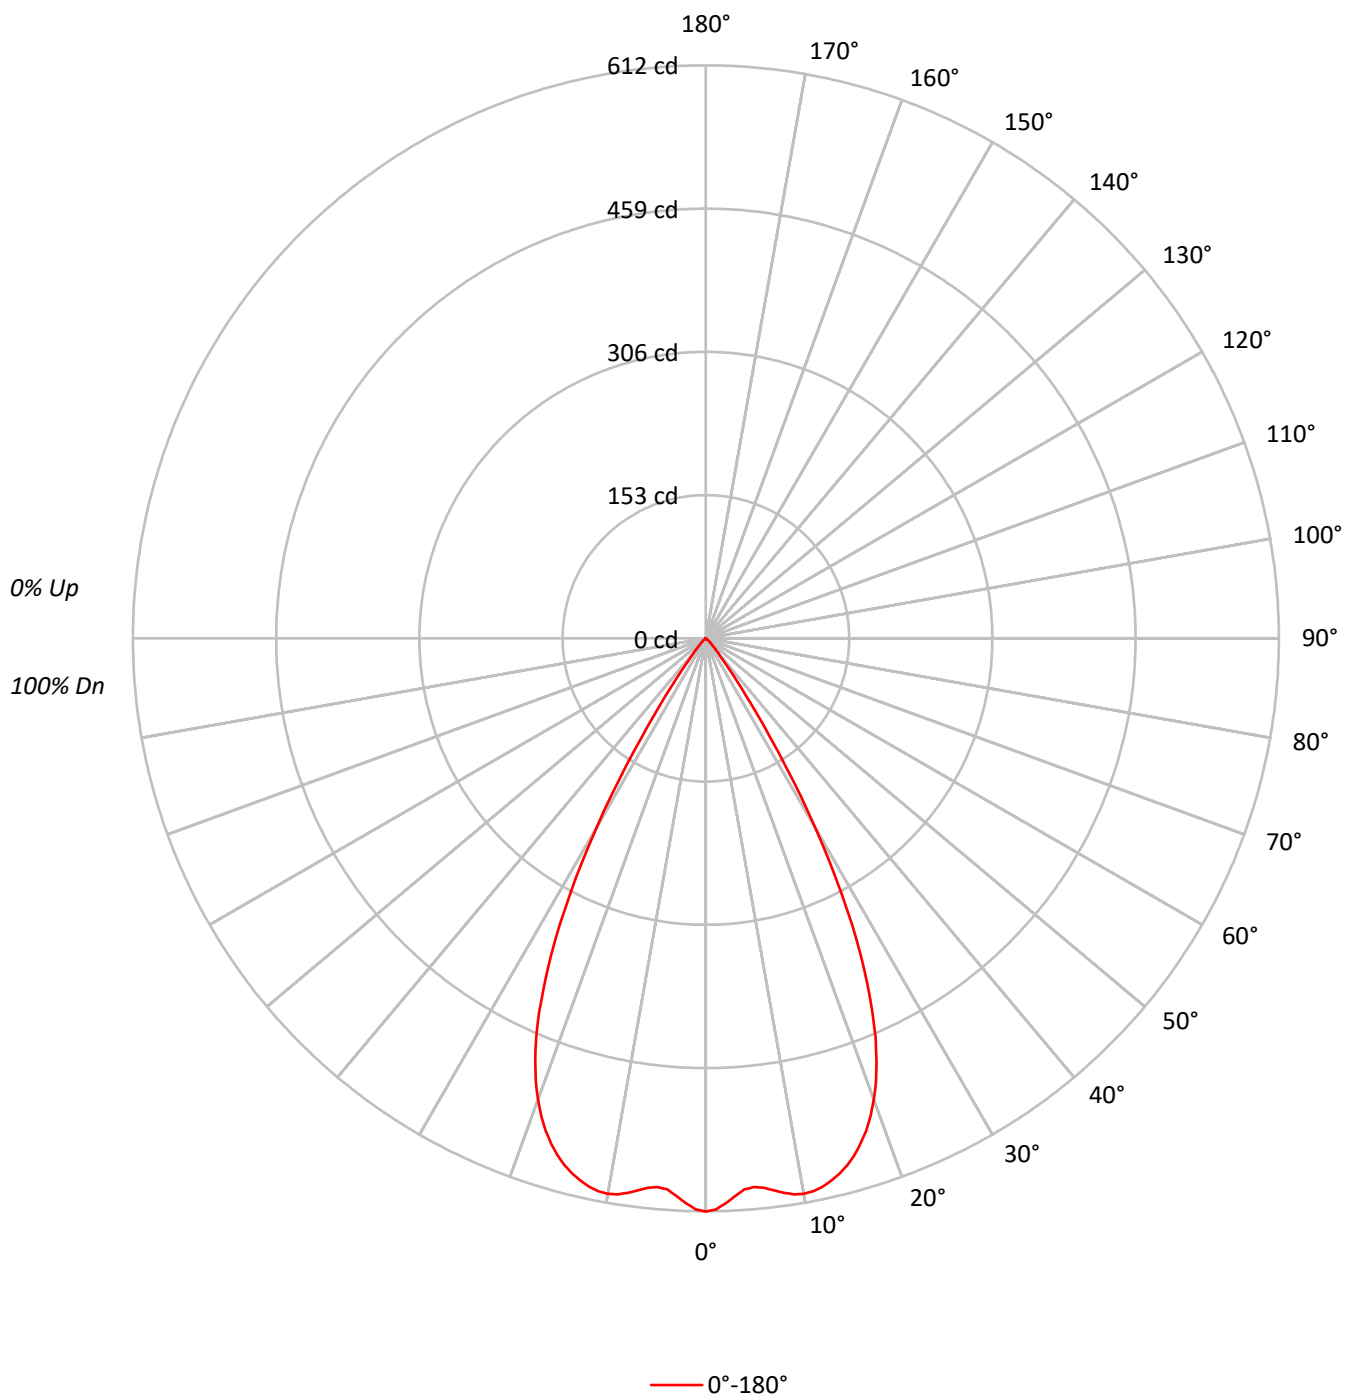



TEST NUMBER: P1290330

CATALOG NUMBER: P3AS05R55W2N902750DE010 E3D1WMH_2700K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10		0			
RCR																										
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102		100			
1	114	111	109	107		112	109	107	105		105	104	102		102	100	99		98	97	96		95			
2	109	105	101	98		107	103	100	97		100	97	95		97	95	93		94	92	91		89			
3	104	98	94	90		102	97	93	90		95	91	88		92	89	87		90	88	86		84			
4	100	93	88	84		98	92	87	84		90	86	83		88	84	82		86	83	81		79			
5	95	88	82	79		94	87	82	78		85	81	78		84	80	77		82	79	76		75			
6	91	83	78	74		90	82	77	74		81	76	73		80	76	73		78	75	72		71			
7	87	79	73	70		86	78	73	69		77	72	69		76	72	69		75	71	68		67			
8	83	75	69	66		82	74	69	65		73	69	65		72	68	65		71	68	65		63			
9	80	71	66	62		79	71	66	62		70	65	62		69	65	62		68	64	61		60			
10	77	68	62	59		76	67	62	59		67	62	59		66	62	59		65	61	58		57			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	134266
5°	129518
10°	134132
15°	132260
20°	122394
25°	98982
30°	59326
35°	20104
40°	5525
45°	2450
50°	716
55°	153
60°	88
65°	104
70°	128
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2450 cd/sqm

TEST NUMBER: P1290330

CATALOG NUMBER: P3AS05R55W2N902750DE010 E3D1WMH_2700K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	56.9	12.3
10°-20°	162.2	35.0
20°-30°	180.3	38.9
30°-40°	56.1	12.1
40°-50°	6.7	1.5
50°-60°	0.5	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	399.4	86.3
0°-40°	455.5	98.4
0°-60°	462.8	100.0
0°-90°	463.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	463.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	612	
5°	588	57
15°	583	162
25°	409	180
35°	75	56
45°	8	7
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1290330

CATALOG NUMBER: P3AS05R55W2N902750DE010 E3D1WMH_2700K

CANDELA DISTRIBUTION (FULL):

0°	
0°	612.3
1°	610.0
2°	604.0
3°	596.6
4°	590.0
5°	588.4
6°	590.1
7°	593.8
8°	598.0
9°	601.4
10°	602.4
11°	601.7
12°	598.9
13°	594.5
14°	589.4
15°	582.6
16°	574.7
17°	564.6
18°	553.4
19°	539.8
20°	524.5
21°	507.1
22°	486.5
23°	463.8
24°	437.8
25°	409.1
26°	377.7
27°	344.2
28°	308.5
29°	271.8
30°	234.3
31°	196.7
32°	159.9
32.5°	143.5
33°	126.6
34°	98.0
35°	75.1
36°	57.2
37°	42.4
37.5°	36.2
38°	31.5
39°	23.9
40°	19.3
42.5°	12.3
45°	7.9



TEST NUMBER: P1290330

CATALOG NUMBER: P3AS05R55W2N902750DE010 E3D1WMH_2700K

CANDELA DISTRIBUTION (continued):

	0°
47.5°	4.7
50°	2.1
52.5°	0.7
55°	0.4
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.2
67.5°	0.2
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)