

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1290552

Luminaire Tested: P3AS05R55W2N902765DE010 E3DLD1WH\_3000K

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1290552  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R55W2N902765DE010 E3DLD1WH\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R55 optic, 3000K CCT AND, 90CRI ,  
E3DLD1WH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 335.0 lumens  
Efficiency: N/A  
Efficacy: 56.8 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1290552

CATALOG NUMBER: P3AS05R55W2N902765DE010 E3DLD1WH\_3000K

### Luminous Intensity Polar Plot

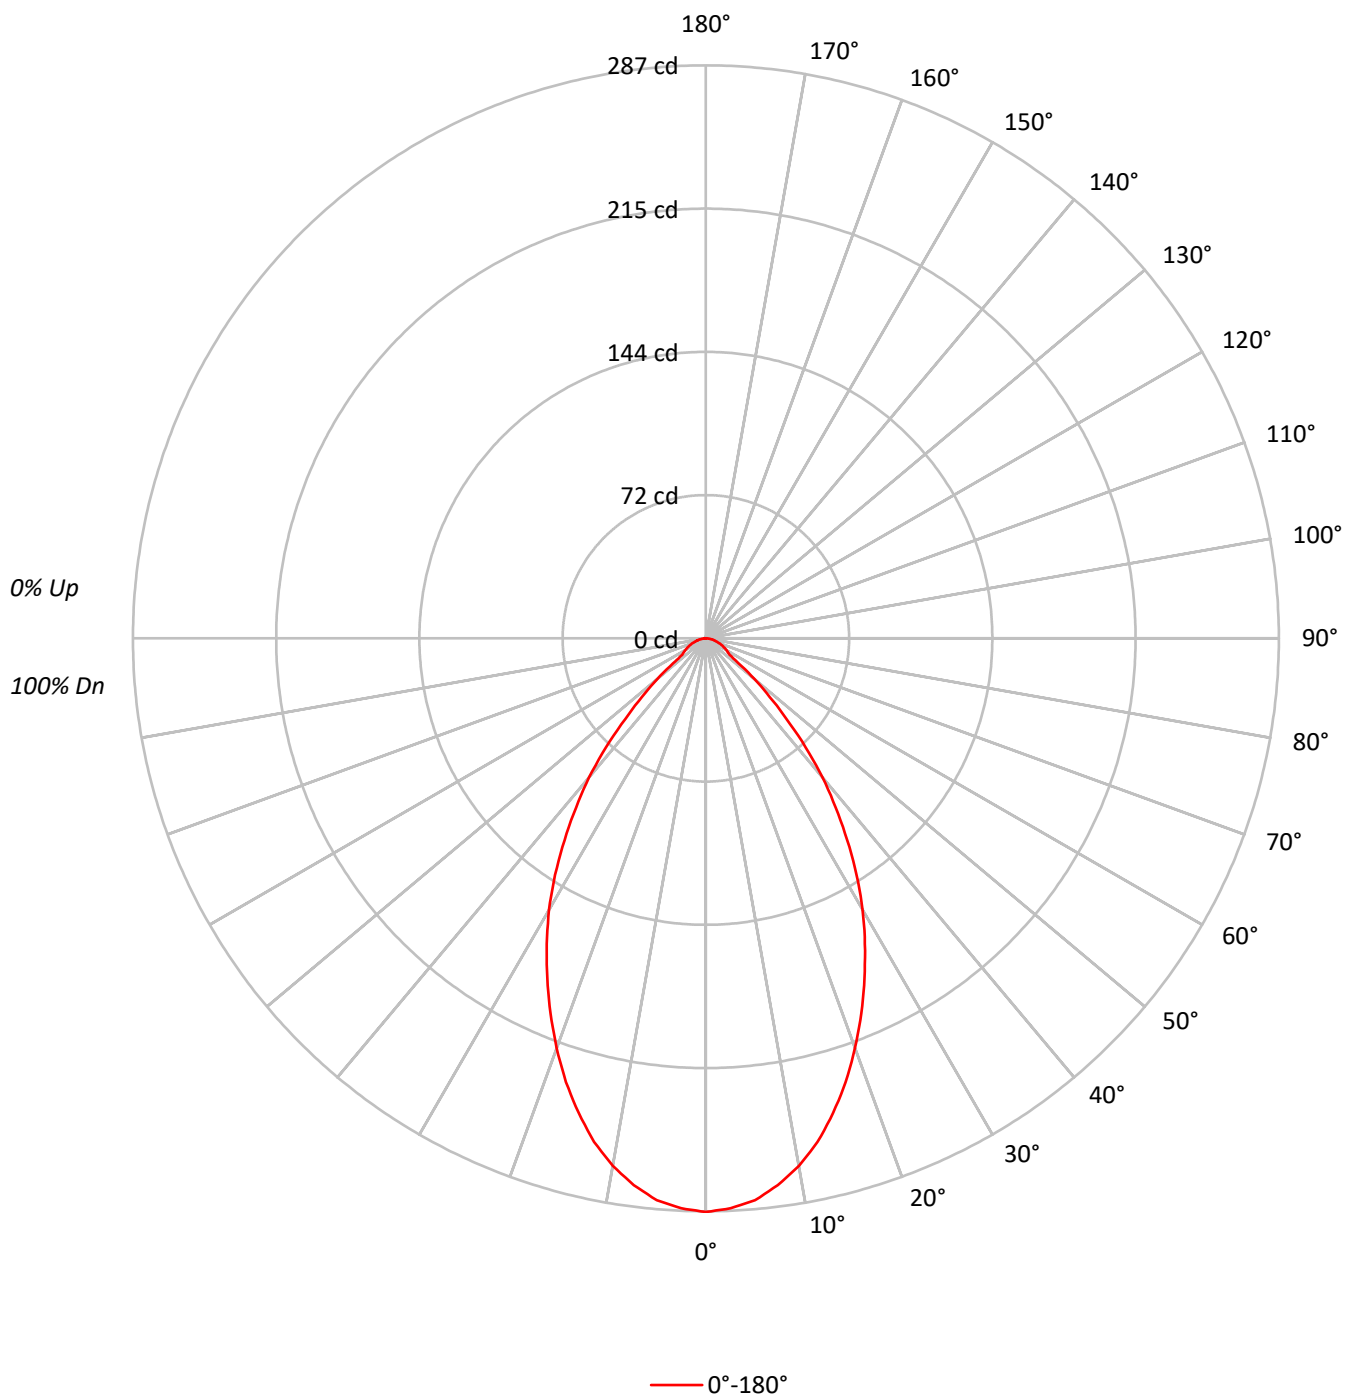

TEST NUMBER: P1290552

CATALOG NUMBER: P3AS05R55W2N902765DE010 E3DLD1WH\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |     |     |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |     |     | 0   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 | 100 |
| 1   | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 102 | 103 | 100 | 98  |  | 99  | 97  | 95  |  | 95  | 94  | 93  | 91  |
| 2   | 105 | 100 | 95  | 91  | 103 | 98  | 93  | 90  | 94  | 91  | 88  |  | 91  | 88  | 86  |  | 89  | 86  | 84  | 82  |
| 3   | 99  | 91  | 85  | 81  | 97  | 90  | 84  | 80  | 87  | 82  | 79  |  | 85  | 81  | 77  |  | 82  | 79  | 76  | 74  |
| 4   | 93  | 84  | 77  | 72  | 91  | 83  | 77  | 72  | 80  | 75  | 71  |  | 78  | 74  | 70  |  | 76  | 73  | 69  | 68  |
| 5   | 87  | 77  | 71  | 66  | 85  | 76  | 70  | 65  | 75  | 69  | 65  |  | 73  | 68  | 64  |  | 71  | 67  | 64  | 62  |
| 6   | 82  | 72  | 65  | 60  | 80  | 71  | 64  | 60  | 69  | 64  | 59  |  | 68  | 63  | 59  |  | 66  | 62  | 58  | 57  |
| 7   | 77  | 67  | 60  | 55  | 76  | 66  | 59  | 55  | 65  | 59  | 54  |  | 63  | 58  | 54  |  | 62  | 57  | 54  | 52  |
| 8   | 73  | 62  | 55  | 51  | 72  | 62  | 55  | 51  | 60  | 54  | 50  |  | 59  | 54  | 50  |  | 58  | 53  | 50  | 48  |
| 9   | 69  | 58  | 51  | 47  | 68  | 58  | 51  | 47  | 57  | 51  | 47  |  | 56  | 50  | 46  |  | 55  | 50  | 46  | 45  |
| 10  | 65  | 55  | 48  | 44  | 64  | 54  | 48  | 44  | 53  | 47  | 43  |  | 52  | 47  | 43  |  | 52  | 47  | 43  | 42  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 62999 |
| 5°  | 62183 |
| 10° | 59741 |
| 15° | 55869 |
| 20° | 50964 |
| 25° | 45462 |
| 30° | 39778 |
| 35° | 33033 |
| 40° | 26049 |
| 45° | 17676 |
| 50° | 10814 |
| 55° | 5582  |
| 60° | 5219  |
| 65° | 4929  |
| 70° | 4552  |
| 75° | 3982  |
| 80° | 4041  |
| 85° | 3019  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 17676 cd/sqm

TEST NUMBER: P1290552

CATALOG NUMBER: P3AS05R55W2N902765DE010 E3DLD1WH\_3000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 26.5   | 7.9       |
| 10°-20°   | 68.8   | 20.5      |
| 20°-30°   | 86.1   | 25.7      |
| 30°-40°   | 76.9   | 22.9      |
| 40°-50°   | 45.0   | 13.4      |
| 50°-60°   | 15.6   | 4.6       |
| 60°-70°   | 9.4    | 2.8       |
| 70°-80°   | 5.2    | 1.6       |
| 80°-90°   | 1.5    | 0.5       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 181.4  | 54.1      |
| 0°-40°    | 258.3  | 77.1      |
| 0°-60°    | 318.9  | 95.2      |
| 0°-90°    | 335.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 335.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 287 |      |
| 5°  | 282 | 26   |
| 15° | 246 | 69   |
| 25° | 188 | 86   |
| 35° | 123 | 77   |
| 45° | 57  | 45   |
| 55° | 15  | 16   |
| 65° | 10  | 9    |
| 75° | 5   | 5    |
| 85° | 1   | 2    |
| 90° | 0   |      |

TEST NUMBER: P1290552

CATALOG NUMBER: P3AS05R55W2N902765DE010 E3DLD1WH\_3000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 287.3 |
| 2.5°  | 285.7 |
| 5°    | 282.5 |
| 7.5°  | 276.2 |
| 10°   | 268.3 |
| 12.5° | 258.4 |
| 15°   | 246.1 |
| 17.5° | 233.0 |
| 20°   | 218.4 |
| 22.5° | 203.4 |
| 25°   | 187.9 |
| 27.5° | 172.5 |
| 30°   | 157.1 |
| 32.5° | 140.5 |
| 35°   | 123.4 |
| 37.5° | 106.8 |
| 40°   | 91.0  |
| 42.5° | 74.0  |
| 45°   | 57.0  |
| 47.5° | 43.5  |
| 50°   | 31.7  |
| 52.5° | 20.6  |
| 55°   | 14.6  |
| 57.5° | 13.1  |
| 60°   | 11.9  |
| 62.5° | 10.7  |
| 65°   | 9.5   |
| 67.5° | 8.3   |
| 70°   | 7.1   |
| 72.5° | 5.9   |
| 75°   | 4.7   |
| 77.5° | 4.0   |
| 80°   | 3.2   |
| 82.5° | 2.0   |
| 85°   | 1.2   |
| 87.5° | 0.8   |
| 90°   | 0.0   |

(END OF REPORT)