

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1290650

Luminaire Tested: P3AS05R60W2N902750DE010 E3D1WMH\_3000K

Issue Date: 1/29/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1290650  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-15)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R60W2N902750DE010 E3D1WMH\_3000K  
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 3000K CCT AND, 90CRI ,  
E3D1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 474.0 lumens  
Efficiency: N/A  
Efficacy: 80.3 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.88  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1290650

CATALOG NUMBER: P3AS05R60W2N902750DE010 E3D1WMH\_3000K

### Luminous Intensity Polar Plot

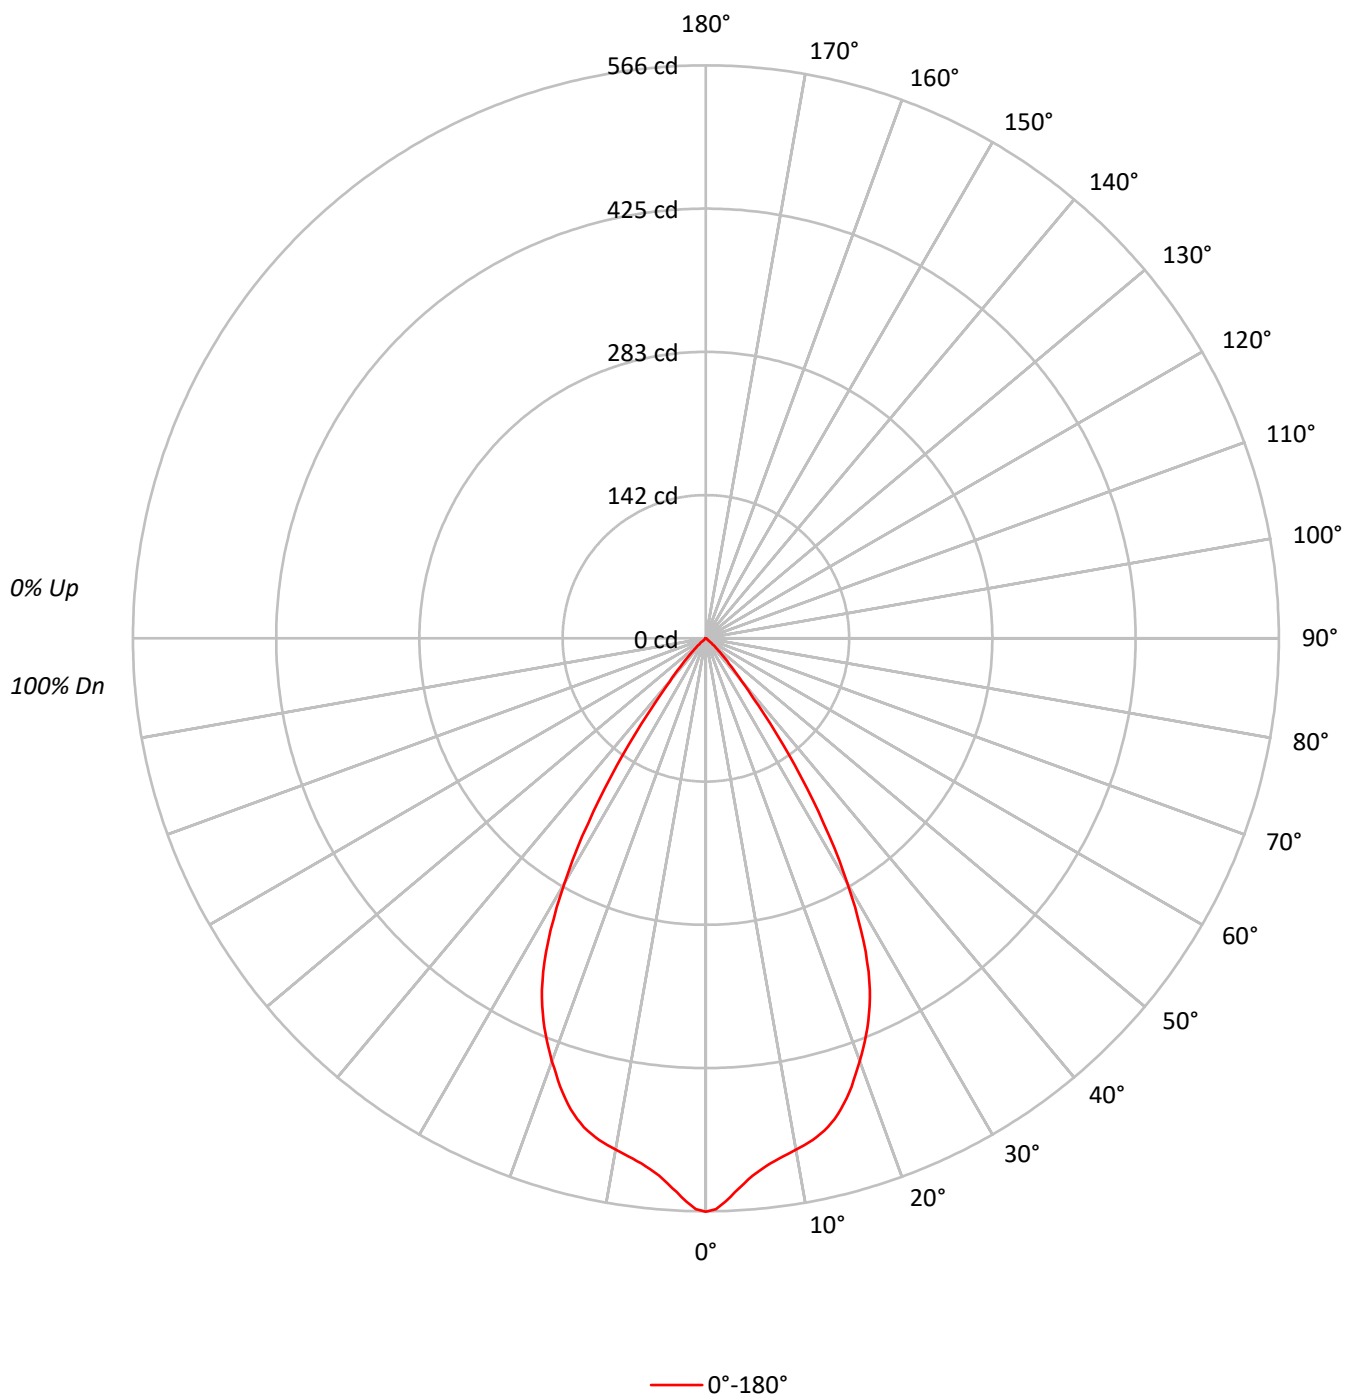

TEST NUMBER: P1290650

CATALOG NUMBER: P3AS05R60W2N902750DE010 E3D1WMH\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |     | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 102 | 102 | 100 |
| 1   | 114 | 111 | 109 | 106 | 111 | 109 | 107 | 105 | 105 | 103 | 102 | 101 | 100 | 99  | 98  | 97  | 96  | 96  | 96  | 94  |
| 2   | 108 | 104 | 100 | 96  | 106 | 102 | 98  | 95  | 99  | 96  | 93  | 96  | 93  | 91  | 93  | 91  | 89  | 88  | 88  | 88  |
| 3   | 103 | 97  | 92  | 88  | 101 | 96  | 91  | 88  | 93  | 89  | 86  | 91  | 87  | 85  | 88  | 86  | 84  | 82  | 82  | 82  |
| 4   | 98  | 91  | 85  | 81  | 96  | 90  | 85  | 81  | 88  | 83  | 80  | 86  | 82  | 79  | 84  | 81  | 78  | 77  | 77  | 77  |
| 5   | 93  | 85  | 80  | 75  | 92  | 84  | 79  | 75  | 83  | 78  | 74  | 81  | 77  | 74  | 79  | 76  | 73  | 72  | 72  | 72  |
| 6   | 89  | 80  | 74  | 70  | 87  | 79  | 74  | 70  | 78  | 73  | 70  | 77  | 72  | 69  | 75  | 71  | 69  | 67  | 67  | 67  |
| 7   | 85  | 76  | 70  | 66  | 83  | 75  | 69  | 65  | 74  | 69  | 65  | 72  | 68  | 65  | 71  | 67  | 64  | 63  | 63  | 63  |
| 8   | 81  | 71  | 65  | 61  | 79  | 71  | 65  | 61  | 70  | 65  | 61  | 69  | 64  | 61  | 68  | 64  | 61  | 59  | 59  | 59  |
| 9   | 77  | 67  | 62  | 58  | 76  | 67  | 61  | 58  | 66  | 61  | 57  | 65  | 61  | 57  | 64  | 60  | 57  | 56  | 56  | 56  |
| 10  | 73  | 64  | 58  | 54  | 72  | 63  | 58  | 54  | 63  | 58  | 54  | 62  | 57  | 54  | 61  | 57  | 54  | 53  | 53  | 53  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 124201 |
| 5°  | 117235 |
| 10° | 114204 |
| 15° | 111578 |
| 20° | 103749 |
| 25° | 92739  |
| 30° | 70846  |
| 35° | 40903  |
| 40° | 15887  |
| 45° | 6605   |
| 50° | 1467   |
| 55° | 229    |
| 60° | 175    |
| 65° | 104    |
| 70° | 128    |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 6605 cd/sqm

TEST NUMBER: P1290650

CATALOG NUMBER: P3AS05R60W2N902750DE010 E3D1WMH\_3000K

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 50.3   | 10.6      |
| 10°-20°   | 136.9  | 28.9      |
| 20°-30°   | 171.5  | 36.2      |
| 30°-40°   | 95.9   | 20.2      |
| 40°-50°   | 18.2   | 3.8       |
| 50°-60°   | 1.0    | 0.2       |
| 60°-70°   | 0.2    | 0.0       |
| 70°-80°   | 0.1    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 358.7  | 75.7      |
| 0°-40°    | 454.6  | 95.9      |
| 0°-60°    | 473.7  | 99.9      |
| 0°-90°    | 474.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 474.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 566 |      |
| 5°  | 533 | 50   |
| 15° | 492 | 137  |
| 25° | 383 | 171  |
| 35° | 153 | 96   |
| 45° | 21  | 18   |
| 55° | 1   | 1    |
| 65° | 0   | 0    |
| 75° | 0   | 0    |
| 85° | 0   | 0    |
| 90° | 0   |      |

TEST NUMBER: P1290650

CATALOG NUMBER: P3AS05R60W2N902750DE010 E3D1WMH\_3000K

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 566.4 |
| 1°    | 564.0 |
| 2°    | 556.7 |
| 3°    | 548.0 |
| 4°    | 539.8 |
| 5°    | 532.6 |
| 6°    | 527.2 |
| 7°    | 522.6 |
| 8°    | 519.1 |
| 9°    | 515.8 |
| 10°   | 512.9 |
| 11°   | 509.9 |
| 12°   | 506.7 |
| 13°   | 502.6 |
| 14°   | 497.7 |
| 15°   | 491.5 |
| 16°   | 484.0 |
| 17°   | 475.4 |
| 18°   | 465.7 |
| 19°   | 454.7 |
| 20°   | 444.6 |
| 21°   | 433.7 |
| 22°   | 422.5 |
| 23°   | 410.7 |
| 24°   | 397.7 |
| 25°   | 383.3 |
| 26°   | 366.5 |
| 27°   | 347.7 |
| 28°   | 326.5 |
| 29°   | 304.0 |
| 30°   | 279.8 |
| 31°   | 255.4 |
| 32°   | 230.2 |
| 32.5° | 216.4 |
| 33°   | 204.0 |
| 34°   | 178.2 |
| 35°   | 152.8 |
| 36°   | 129.9 |
| 37°   | 105.7 |
| 37.5° | 94.6  |
| 38°   | 83.8  |
| 39°   | 67.5  |
| 40°   | 55.5  |
| 42.5° | 33.7  |
| 45°   | 21.3  |



TEST NUMBER: P1290650

CATALOG NUMBER: P3AS05R60W2N902750DE010 E3D1WMH\_3000K

**CANDELA DISTRIBUTION (continued):**

|       | 0°   |
|-------|------|
| 47.5° | 11.8 |
| 50°   | 4.3  |
| 52.5° | 1.0  |
| 55°   | 0.6  |
| 57.5° | 0.4  |
| 60°   | 0.4  |
| 62.5° | 0.2  |
| 65°   | 0.2  |
| 67.5° | 0.2  |
| 70°   | 0.2  |
| 72.5° | 0.2  |
| 75°   | 0.0  |
| 77.5° | 0.0  |
| 80°   | 0.0  |
| 82.5° | 0.0  |
| 85°   | 0.0  |
| 87.5° | 0.0  |
| 90°   | 0.0  |

(END OF REPORT)