

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1290849

Luminaire Tested: P3AS05R60W2N902765DE010 E3DLD1GPH_4000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1290849
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-38)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R60W2N902765DE010 E3DLD1GPH_4000K
Description: 3in Adjustable Tunable White LED luminaire with, R60 optic, 4000K CCT AND, 90CRI ,
E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 162.0 lumens
Efficiency: N/A
Efficacy: 27.5 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1290849

CATALOG NUMBER: P3AS05R60W2N902765DE010 E3DLD1GPH_4000K

Luminous Intensity Polar Plot

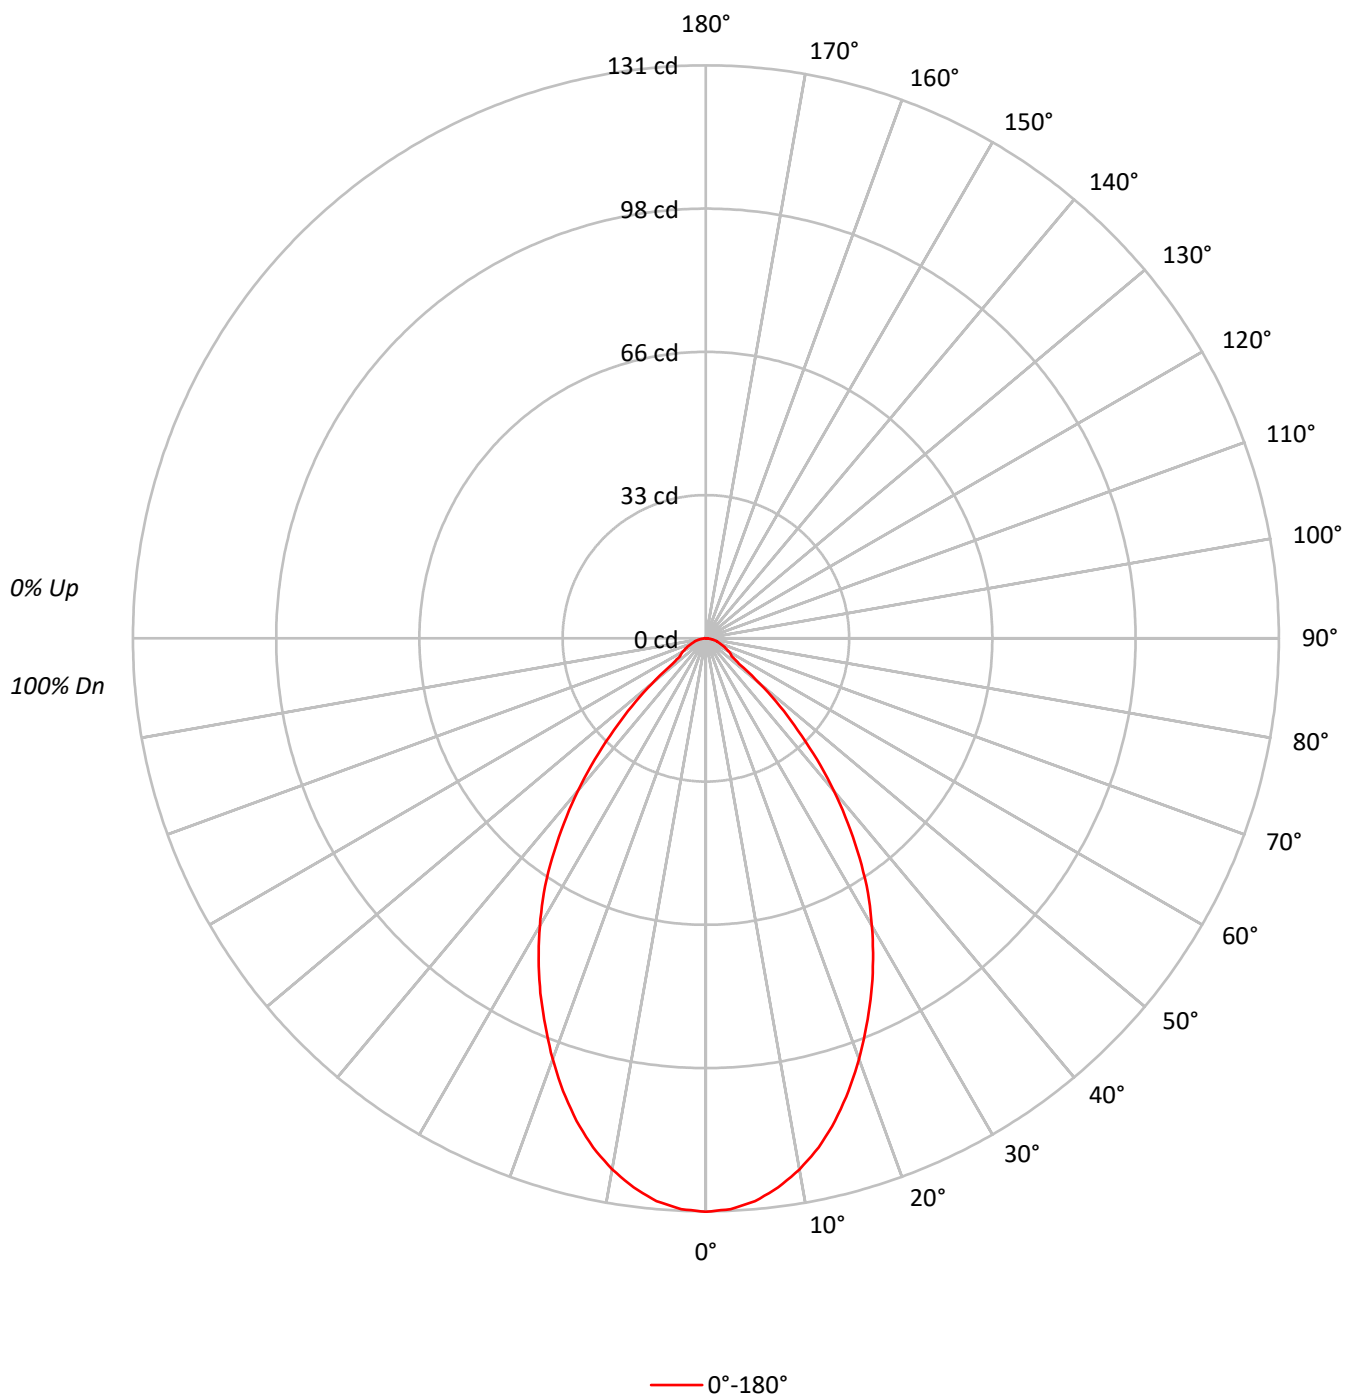

TEST NUMBER: P1290849

CATALOG NUMBER: P3AS05R60W2N902765DE010 E3DLD1GPH_4000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91		
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	84	82		
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74		
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67		
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61		
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56		
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51		
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47		
9	68	57	51	46	67	57	50	46	56	50	46	55	49	46	54	49	45	44		
10	65	54	47	43	64	53	47	43	52	47	43	52	46	42	51	46	42	41		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	28748
5°	28439
10°	27454
15°	25925
20°	23895
25°	21654
30°	19218
35°	16410
40°	13053
45°	9210
50°	5492
55°	2791
60°	2675
65°	2439
70°	2244
75°	2203
80°	2020
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 9210 cd/sqm

TEST NUMBER: P1290849

CATALOG NUMBER: P3AS05R60W2N902765DE010 E3DLD1GPH_4000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	12.1	7.5
10°-20°	31.9	19.7
20°-30°	41.0	25.3
30°-40°	38.0	23.5
40°-50°	23.1	14.3
50°-60°	7.7	4.8
60°-70°	4.7	2.9
70°-80°	2.7	1.6
80°-90°	0.8	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	85.1	52.5
0°-40°	123.1	76.0
0°-60°	153.9	95.0
0°-90°	162.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	162.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	131	
5°	129	12
15°	114	32
25°	90	41
35°	61	38
45°	30	23
55°	7	8
65°	5	5
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1290849

CATALOG NUMBER: P3AS05R60W2N902765DE010 E3DLD1GPH_4000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	131.1
2.5°	130.6
5°	129.2
7.5°	126.6
10°	123.3
12.5°	119.2
15°	114.2
17.5°	108.5
20°	102.4
22.5°	95.9
25°	89.5
27.5°	82.8
30°	75.9
32.5°	69.0
35°	61.3
37.5°	53.3
40°	45.6
42.5°	37.6
45°	29.7
47.5°	23.0
50°	16.1
52.5°	9.6
55°	7.3
57.5°	6.7
60°	6.1
62.5°	5.3
65°	4.7
67.5°	4.1
70°	3.5
72.5°	2.9
75°	2.6
77.5°	2.0
80°	1.6
82.5°	1.0
85°	0.6
87.5°	0.4
90°	0.0

(END OF REPORT)