

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291110

Luminaire Tested: P3AS05R65W2N902765DE010 E3D1LI_6500K

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1291110
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R65W2N902765DE010 E3D1LI_6500K
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 6500K CCT AND, 90CRI ,
E3D1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 476.0 lumens
Efficiency: N/A
Efficacy: 80.7 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1291110
CATALOG NUMBER: P3AS05R65W2N902765DE010 E3D1LI_6500K

Luminous Intensity Polar Plot

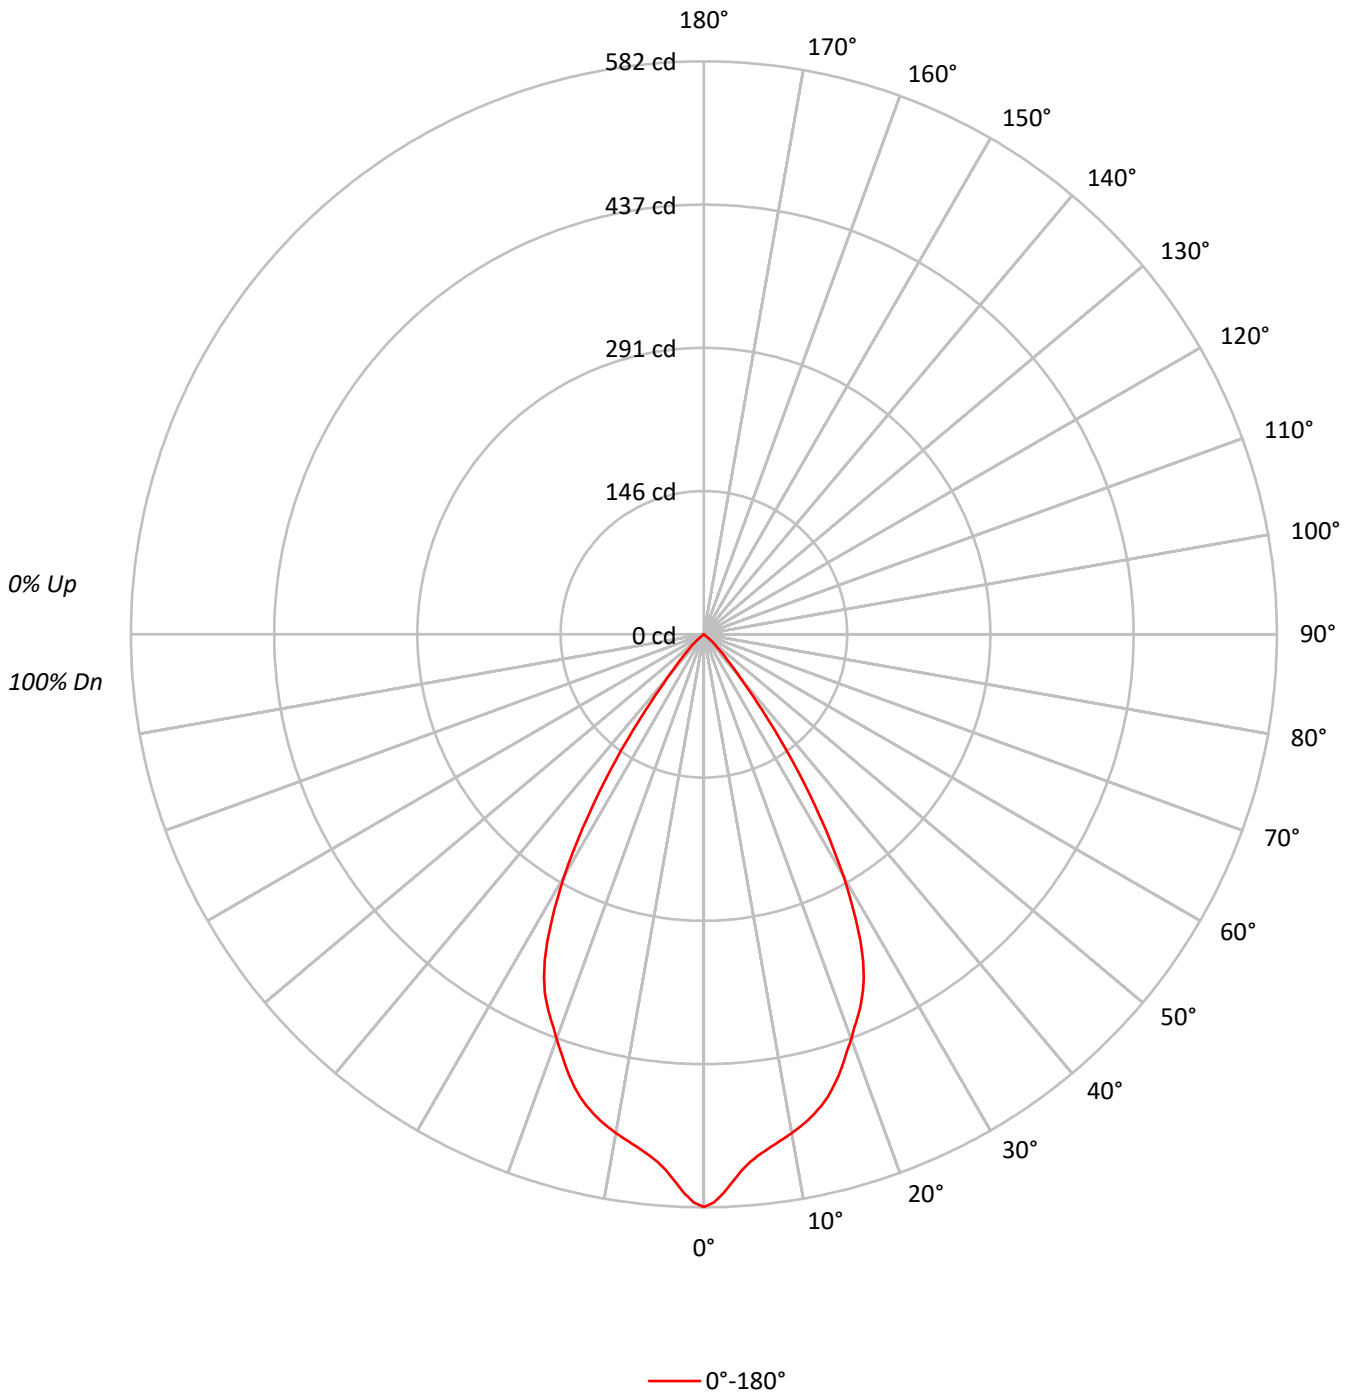



TEST NUMBER: P1291110

CATALOG NUMBER: P3AS05R65W2N902765DE010 E3D1LI_6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | |
| RCR | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | 100 |
| 1 | 114 | 111 | 109 | 106 | 111 | 109 | 107 | 105 | 105 | 103 | 102 | 101 | 100 | 99 | 98 | 97 | 96 | 94 | | | | 94 |
| 2 | 108 | 104 | 100 | 96 | 106 | 102 | 98 | 95 | 99 | 96 | 93 | 96 | 93 | 91 | 93 | 91 | 89 | 88 | | | | 88 |
| 3 | 103 | 97 | 92 | 88 | 101 | 95 | 91 | 88 | 93 | 89 | 86 | 90 | 87 | 85 | 88 | 86 | 83 | 82 | | | | 82 |
| 4 | 98 | 91 | 85 | 81 | 96 | 90 | 85 | 81 | 87 | 83 | 80 | 85 | 82 | 79 | 84 | 81 | 78 | 77 | | | | 77 |
| 5 | 93 | 85 | 79 | 75 | 92 | 84 | 79 | 75 | 82 | 78 | 74 | 81 | 77 | 74 | 79 | 76 | 73 | 72 | | | | 72 |
| 6 | 89 | 80 | 74 | 70 | 87 | 79 | 74 | 70 | 78 | 73 | 69 | 76 | 72 | 69 | 75 | 71 | 68 | 67 | | | | 67 |
| 7 | 84 | 75 | 70 | 65 | 83 | 75 | 69 | 65 | 73 | 69 | 65 | 72 | 68 | 65 | 71 | 67 | 64 | 63 | | | | 63 |
| 8 | 80 | 71 | 65 | 61 | 79 | 71 | 65 | 61 | 69 | 64 | 61 | 68 | 64 | 61 | 67 | 63 | 60 | 59 | | | | 59 |
| 9 | 77 | 67 | 61 | 58 | 76 | 67 | 61 | 57 | 66 | 61 | 57 | 65 | 60 | 57 | 64 | 60 | 57 | 56 | | | | 56 |
| 10 | 73 | 64 | 58 | 54 | 72 | 63 | 58 | 54 | 62 | 57 | 54 | 62 | 57 | 54 | 61 | 57 | 54 | 52 | | | | 52 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 127556 |
| 5° | 118424 |
| 10° | 114538 |
| 15° | 110375 |
| 20° | 102046 |
| 25° | 92981 |
| 30° | 71834 |
| 35° | 41626 |
| 40° | 16517 |
| 45° | 7039 |
| 50° | 1672 |
| 55° | 229 |
| 60° | 175 |
| 65° | 104 |
| 70° | 128 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7039 cd/sqm



TEST NUMBER: P1291110

CATALOG NUMBER: P3AS05R65W2N902765DE010 E3D1LI_6500K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 50.7 | 10.7 |
| 10°-20° | 135.5 | 28.5 |
| 20°-30° | 171.5 | 36.0 |
| 30°-40° | 97.6 | 20.5 |
| 40°-50° | 19.4 | 4.1 |
| 50°-60° | 1.0 | 0.2 |
| 60°-70° | 0.3 | 0.1 |
| 70°-80° | 0.0 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 357.7 | 75.1 |
| 0°-40° | 455.3 | 95.6 |
| 0°-60° | 475.7 | 99.9 |
| 0°-90° | 476.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 476.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 582 | |
| 5° | 538 | 51 |
| 15° | 486 | 135 |
| 25° | 384 | 171 |
| 35° | 156 | 98 |
| 45° | 23 | 19 |
| 55° | 1 | 1 |
| 65° | 0 | 0 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P1291110

CATALOG NUMBER: P3AS05R65W2N902765DE010 E3D1LI_6500K

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|-------|
| 0° | 581.7 |
| 1° | 577.4 |
| 2° | 568.0 |
| 3° | 557.0 |
| 4° | 546.2 |
| 5° | 538.0 |
| 6° | 532.0 |
| 7° | 527.1 |
| 8° | 522.8 |
| 9° | 518.5 |
| 10° | 514.4 |
| 11° | 509.9 |
| 12° | 505.2 |
| 13° | 499.5 |
| 14° | 493.4 |
| 15° | 486.2 |
| 16° | 477.6 |
| 17° | 468.2 |
| 18° | 458.0 |
| 19° | 447.3 |
| 20° | 437.3 |
| 21° | 427.1 |
| 22° | 417.9 |
| 23° | 408.3 |
| 24° | 397.2 |
| 25° | 384.3 |
| 26° | 368.8 |
| 27° | 350.2 |
| 28° | 329.3 |
| 29° | 307.0 |
| 30° | 283.7 |
| 31° | 258.1 |
| 32° | 232.6 |
| 32.5° | 219.5 |
| 33° | 206.8 |
| 34° | 181.0 |
| 35° | 155.5 |
| 36° | 132.1 |
| 37° | 108.8 |
| 37.5° | 96.8 |
| 38° | 87.3 |
| 39° | 70.6 |
| 40° | 57.7 |
| 42.5° | 35.6 |
| 45° | 22.7 |



TEST NUMBER: P1291110
CATALOG NUMBER: P3AS05R65W2N902765DE010 E3D1LI_6500K

CANDELA DISTRIBUTION (continued):

| | 0° |
|-------|------|
| 47.5° | 13.3 |
| 50° | 4.9 |
| 52.5° | 1.0 |
| 55° | 0.6 |
| 57.5° | 0.4 |
| 60° | 0.4 |
| 62.5° | 0.4 |
| 65° | 0.2 |
| 67.5° | 0.2 |
| 70° | 0.2 |
| 72.5° | 0.0 |
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |

(END OF REPORT)