

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291127

Luminaire Tested: P3AS05R65W2N902765DE010 E3D1WMH\_5000K

Issue Date: 1/29/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1291127  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/29/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R65W2N902765DE010 E3D1WMH\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 5000K CCT AND, 90CRI ,  
E3D1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 476.0 lumens  
Efficiency: N/A  
Efficacy: 80.7 lumens/watt  
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 5.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1291127  
CATALOG NUMBER: P3AS05R65W2N902765DE010 E3D1WMH\_5000K

### Luminous Intensity Polar Plot

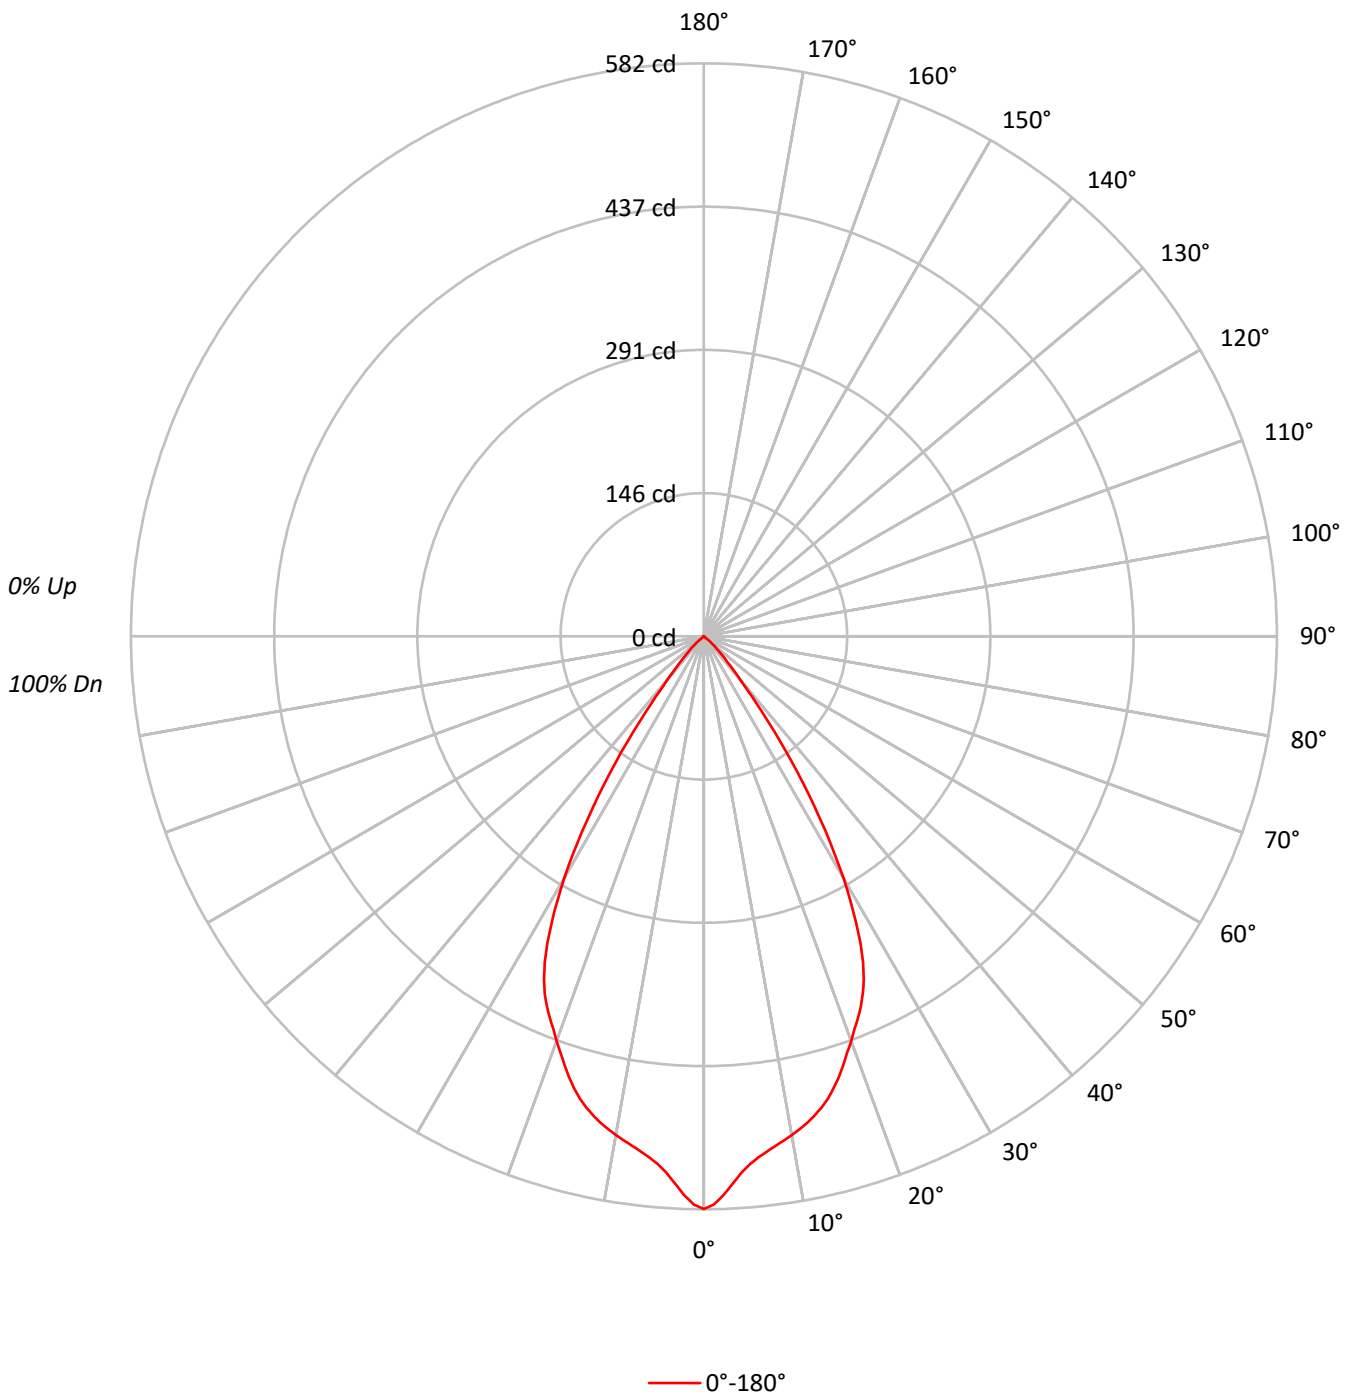



TEST NUMBER: P1291127

CATALOG NUMBER: P3AS05R65W2N902765DE010 E3D1WMH\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94				94
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88				88
3	103	97	92	88	101	95	91	88	93	89	86	90	87	85	88	86	83	82				82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	81	78	77				77
5	93	85	79	75	92	84	79	75	82	78	74	81	77	74	79	76	73	72				72
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67				67
7	84	75	70	65	83	75	69	65	73	69	65	72	68	65	71	67	64	63				63
8	80	71	65	61	79	71	65	61	69	64	61	68	64	61	67	63	60	59				59
9	77	67	61	58	76	67	61	57	66	61	57	65	60	57	64	60	57	56				56
10	73	64	58	54	72	63	58	54	62	57	54	62	57	54	61	57	54	52				52

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	127556
5°	118424
10°	114538
15°	110375
20°	102046
25°	92981
30°	71834
35°	41626
40°	16517
45°	7039
50°	1672
55°	229
60°	175
65°	104
70°	128
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7039 cd/sqm



TEST NUMBER: P1291127

CATALOG NUMBER: P3AS05R65W2N902765DE010 E3D1WMH\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	50.7	10.7
10°-20°	135.5	28.5
20°-30°	171.5	36.0
30°-40°	97.6	20.5
40°-50°	19.4	4.1
50°-60°	1.0	0.2
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	357.7	75.1
0°-40°	455.3	95.6
0°-60°	475.7	99.9
0°-90°	476.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	476.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	582	
5°	538	51
15°	486	135
25°	384	171
35°	156	98
45°	23	19
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1291127  
CATALOG NUMBER: P3AS05R65W2N902765DE010 E3D1WMH\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	581.7
1°	577.4
2°	568.0
3°	557.0
4°	546.2
5°	538.0
6°	532.0
7°	527.1
8°	522.8
9°	518.5
10°	514.4
11°	509.9
12°	505.2
13°	499.5
14°	493.4
15°	486.2
16°	477.6
17°	468.2
18°	458.0
19°	447.3
20°	437.3
21°	427.1
22°	417.9
23°	408.3
24°	397.2
25°	384.3
26°	368.8
27°	350.2
28°	329.3
29°	307.0
30°	283.7
31°	258.1
32°	232.6
32.5°	219.5
33°	206.8
34°	181.0
35°	155.5
36°	132.1
37°	108.8
37.5°	96.8
38°	87.3
39°	70.6
40°	57.7
42.5°	35.6
45°	22.7



TEST NUMBER: P1291127  
CATALOG NUMBER: P3AS05R65W2N902765DE010 E3D1WMH\_5000K

**CANDELA DISTRIBUTION (continued):**

	0°
47.5°	13.3
50°	4.9
52.5°	1.0
55°	0.6
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.2
67.5°	0.2
70°	0.2
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)