

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291175

Luminaire Tested: P3AS05R65W2N902765DE010 E3DLD1H\_5000K

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1291175  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R65W2N902765DE010 E3DLD1H\_5000K  
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 5000K CCT AND, 90CRI ,  
E3DLD1H TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 314.1 lumens  
Efficiency: N/A  
Efficacy: 53.2 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 1  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 5.9  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1291175  
CATALOG NUMBER: P3AS05R65W2N902765DE010 E3DLD1H\_5000K

### Luminous Intensity Polar Plot

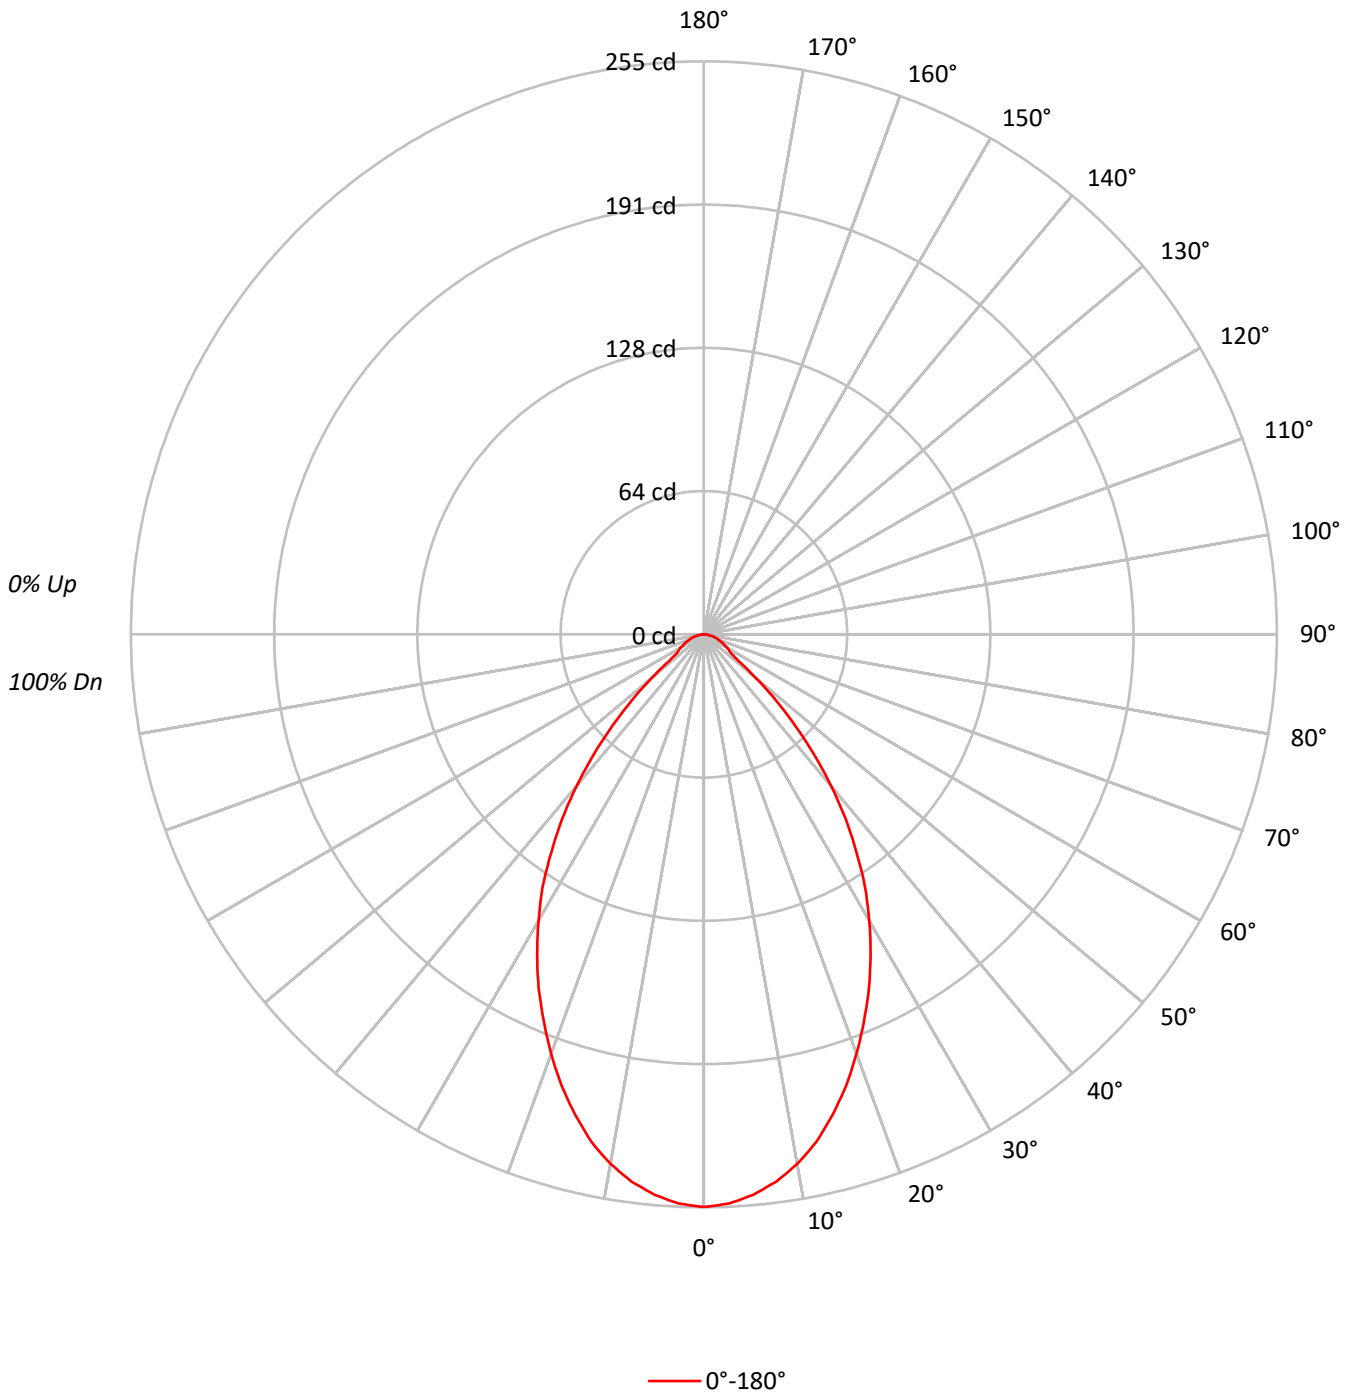



TEST NUMBER: P1291175  
 CATALOG NUMBER: P3AS05R65W2N902765DE010 E3DLD1H\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	103	110	107	104	101	102	100	98	99	97	95	95	94	93	91			
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	86	84	82			
3	99	91	85	80	96	89	84	79	87	82	78	84	80	77	82	78	76	74			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67			
5	87	77	70	65	85	76	69	65	74	68	64	72	67	63	71	66	63	61			
6	82	71	64	59	80	70	64	59	69	63	58	67	62	58	66	61	58	56			
7	77	66	59	54	75	65	59	54	64	58	54	63	57	53	61	57	53	51			
8	72	61	55	50	71	61	54	50	60	54	49	59	53	49	58	53	49	47			
9	68	57	51	46	67	57	50	46	56	50	46	55	49	46	54	49	45	44			
10	65	54	47	43	64	53	47	43	52	47	43	52	46	42	51	46	42	41			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	55873
5°	55118
10°	53283
15°	50239
20°	46344
25°	42075
30°	37272
35°	31695
40°	25219
45°	17800
50°	10337
55°	5658
60°	5263
65°	4774
70°	4360
75°	4067
80°	3536
85°	3019

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 17800 cd/sqm



TEST NUMBER: P1291175

CATALOG NUMBER: P3AS05R65W2N902765DE010 E3DLD1H\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	23.6	7.5
10°-20°	61.9	19.7
20°-30°	79.6	25.3
30°-40°	73.6	23.4
40°-50°	44.4	14.1
50°-60°	15.2	4.8
60°-70°	9.1	2.9
70°-80°	5.2	1.6
80°-90°	1.5	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	165.1	52.6
0°-40°	238.7	76.0
0°-60°	298.3	95.0
0°-90°	314.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	314.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	255	
5°	250	24
15°	221	62
25°	174	80
35°	118	74
45°	57	44
55°	15	15
65°	9	9
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P1291175  
CATALOG NUMBER: P3AS05R65W2N902765DE010 E3DLD1H\_5000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	254.8
2.5°	253.6
5°	250.4
7.5°	245.7
10°	239.3
12.5°	231.3
15°	221.3
17.5°	210.6
20°	198.6
22.5°	186.2
25°	173.9
27.5°	160.7
30°	147.2
32.5°	133.6
35°	118.4
37.5°	103.7
40°	88.1
42.5°	72.6
45°	57.4
47.5°	43.5
50°	30.3
52.5°	19.1
55°	14.8
57.5°	13.2
60°	12.0
62.5°	10.4
65°	9.2
67.5°	8.0
70°	6.8
72.5°	6.0
75°	4.8
77.5°	4.0
80°	2.8
82.5°	2.0
85°	1.2
87.5°	0.8
90°	0.0

(END OF REPORT)