

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291197

Luminaire Tested: P3AS05R65W2N902765DE010 E3DLD1WMH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1291197
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R65W2N902765DE010 E3DLD1WMH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R65 optic, 3500K CCT AND, 90CRI ,
E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 315.9 lumens
Efficiency: N/A
Efficacy: 53.5 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1291197
CATALOG NUMBER: P3AS05R65W2N902765DE010 E3DLD1WMH_3500K

Luminous Intensity Polar Plot

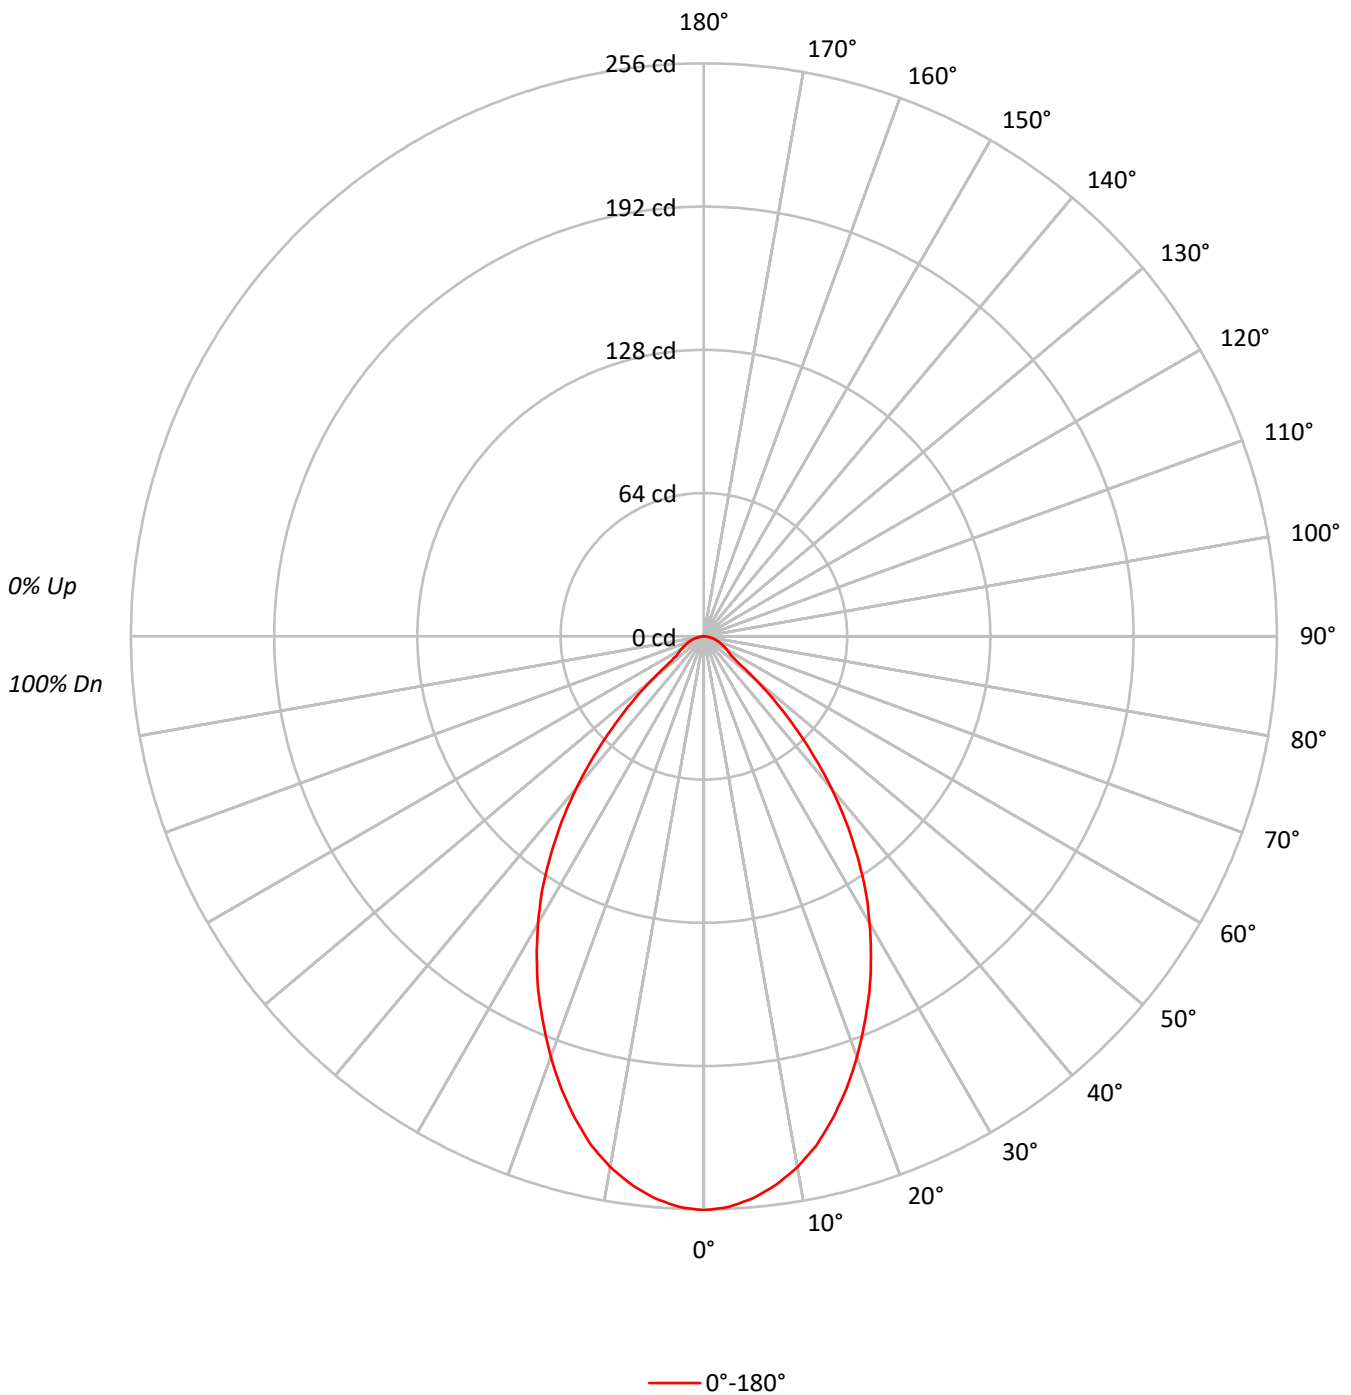



TEST NUMBER: P1291197

CATALOG NUMBER: P3AS05R65W2N902765DE010 E3DLD1WMH_3500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |
| 1 | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 101 | 102 | 100 | 98 | 99 | 97 | 95 | 95 | 94 | 93 | 91 |
| 2 | 105 | 99 | 94 | 90 | 103 | 97 | 93 | 89 | 94 | 90 | 87 | 91 | 88 | 85 | 88 | 86 | 84 | 82 |
| 3 | 99 | 91 | 85 | 80 | 96 | 89 | 84 | 79 | 87 | 82 | 78 | 84 | 80 | 77 | 82 | 78 | 76 | 74 |
| 4 | 92 | 83 | 77 | 72 | 90 | 82 | 76 | 71 | 80 | 75 | 71 | 78 | 73 | 70 | 76 | 72 | 69 | 67 |
| 5 | 87 | 77 | 70 | 65 | 85 | 76 | 69 | 65 | 74 | 68 | 64 | 72 | 67 | 63 | 71 | 66 | 63 | 61 |
| 6 | 82 | 71 | 64 | 59 | 80 | 70 | 64 | 59 | 69 | 63 | 58 | 67 | 62 | 58 | 66 | 61 | 58 | 56 |
| 7 | 77 | 66 | 59 | 54 | 75 | 65 | 59 | 54 | 64 | 58 | 54 | 63 | 57 | 53 | 61 | 57 | 53 | 51 |
| 8 | 72 | 61 | 55 | 50 | 71 | 61 | 54 | 50 | 60 | 54 | 49 | 59 | 53 | 49 | 58 | 53 | 49 | 47 |
| 9 | 68 | 57 | 51 | 46 | 67 | 57 | 50 | 46 | 56 | 50 | 46 | 55 | 49 | 46 | 54 | 49 | 45 | 44 |
| 10 | 65 | 54 | 47 | 43 | 64 | 53 | 47 | 43 | 52 | 47 | 43 | 52 | 46 | 42 | 51 | 46 | 42 | 41 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|-------|
| | 0° |
| 0° | 56224 |
| 5° | 55470 |
| 10° | 53617 |
| 15° | 50556 |
| 20° | 46647 |
| 25° | 42341 |
| 30° | 37499 |
| 35° | 31909 |
| 40° | 25390 |
| 45° | 17924 |
| 50° | 10405 |
| 55° | 5658 |
| 60° | 5263 |
| 65° | 4774 |
| 70° | 4360 |
| 75° | 4067 |
| 80° | 3536 |
| 85° | 3019 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17924 cd/sqm



TEST NUMBER: P1291197

CATALOG NUMBER: P3AS05R65W2N902765DE010 E3DLD1WMH_3500K

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 23.7 | 7.5 |
| 10°-20° | 62.3 | 19.7 |
| 20°-30° | 80.1 | 25.4 |
| 30°-40° | 74.1 | 23.4 |
| 40°-50° | 44.7 | 14.2 |
| 50°-60° | 15.2 | 4.8 |
| 60°-70° | 9.1 | 2.9 |
| 70°-80° | 5.2 | 1.6 |
| 80°-90° | 1.5 | 0.5 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 166.1 | 52.6 |
| 0°-40° | 240.2 | 76.0 |
| 0°-60° | 300.1 | 95.0 |
| 0°-90° | 315.9 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 315.9 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 256 | |
| 5° | 252 | 24 |
| 15° | 223 | 62 |
| 25° | 175 | 80 |
| 35° | 119 | 74 |
| 45° | 58 | 45 |
| 55° | 15 | 15 |
| 65° | 9 | 9 |
| 75° | 5 | 5 |
| 85° | 1 | 1 |
| 90° | 0 | |



TEST NUMBER: P1291197
CATALOG NUMBER: P3AS05R65W2N902765DE010 E3DLD1WMH_3500K

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 256.4 |
| 2.5° | 255.2 |
| 5° | 252.0 |
| 7.5° | 247.2 |
| 10° | 240.8 |
| 12.5° | 232.8 |
| 15° | 222.7 |
| 17.5° | 211.9 |
| 20° | 199.9 |
| 22.5° | 187.4 |
| 25° | 175.0 |
| 27.5° | 161.7 |
| 30° | 148.1 |
| 32.5° | 134.4 |
| 35° | 119.2 |
| 37.5° | 104.3 |
| 40° | 88.7 |
| 42.5° | 73.0 |
| 45° | 57.8 |
| 47.5° | 43.7 |
| 50° | 30.5 |
| 52.5° | 19.3 |
| 55° | 14.8 |
| 57.5° | 13.2 |
| 60° | 12.0 |
| 62.5° | 10.4 |
| 65° | 9.2 |
| 67.5° | 8.0 |
| 70° | 6.8 |
| 72.5° | 6.0 |
| 75° | 4.8 |
| 77.5° | 4.0 |
| 80° | 2.8 |
| 82.5° | 2.0 |
| 85° | 1.2 |
| 87.5° | 0.8 |
| 90° | 0.0 |

(END OF REPORT)