

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291319

Luminaire Tested: P3AS05R70W2N902750DE010 E3DL1WMH_3500K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1291319
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-47)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R70W2N902750DE010 E3DL1WMH_3500K
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 3500K CCT AND, 90CRI ,
E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 404.0 lumens
Efficiency: N/A
Efficacy: 68.5 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 0.98
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1291319
CATALOG NUMBER: P3AS05R70W2N902750DE010 E3DL1WMH_3500K

Luminous Intensity Polar Plot

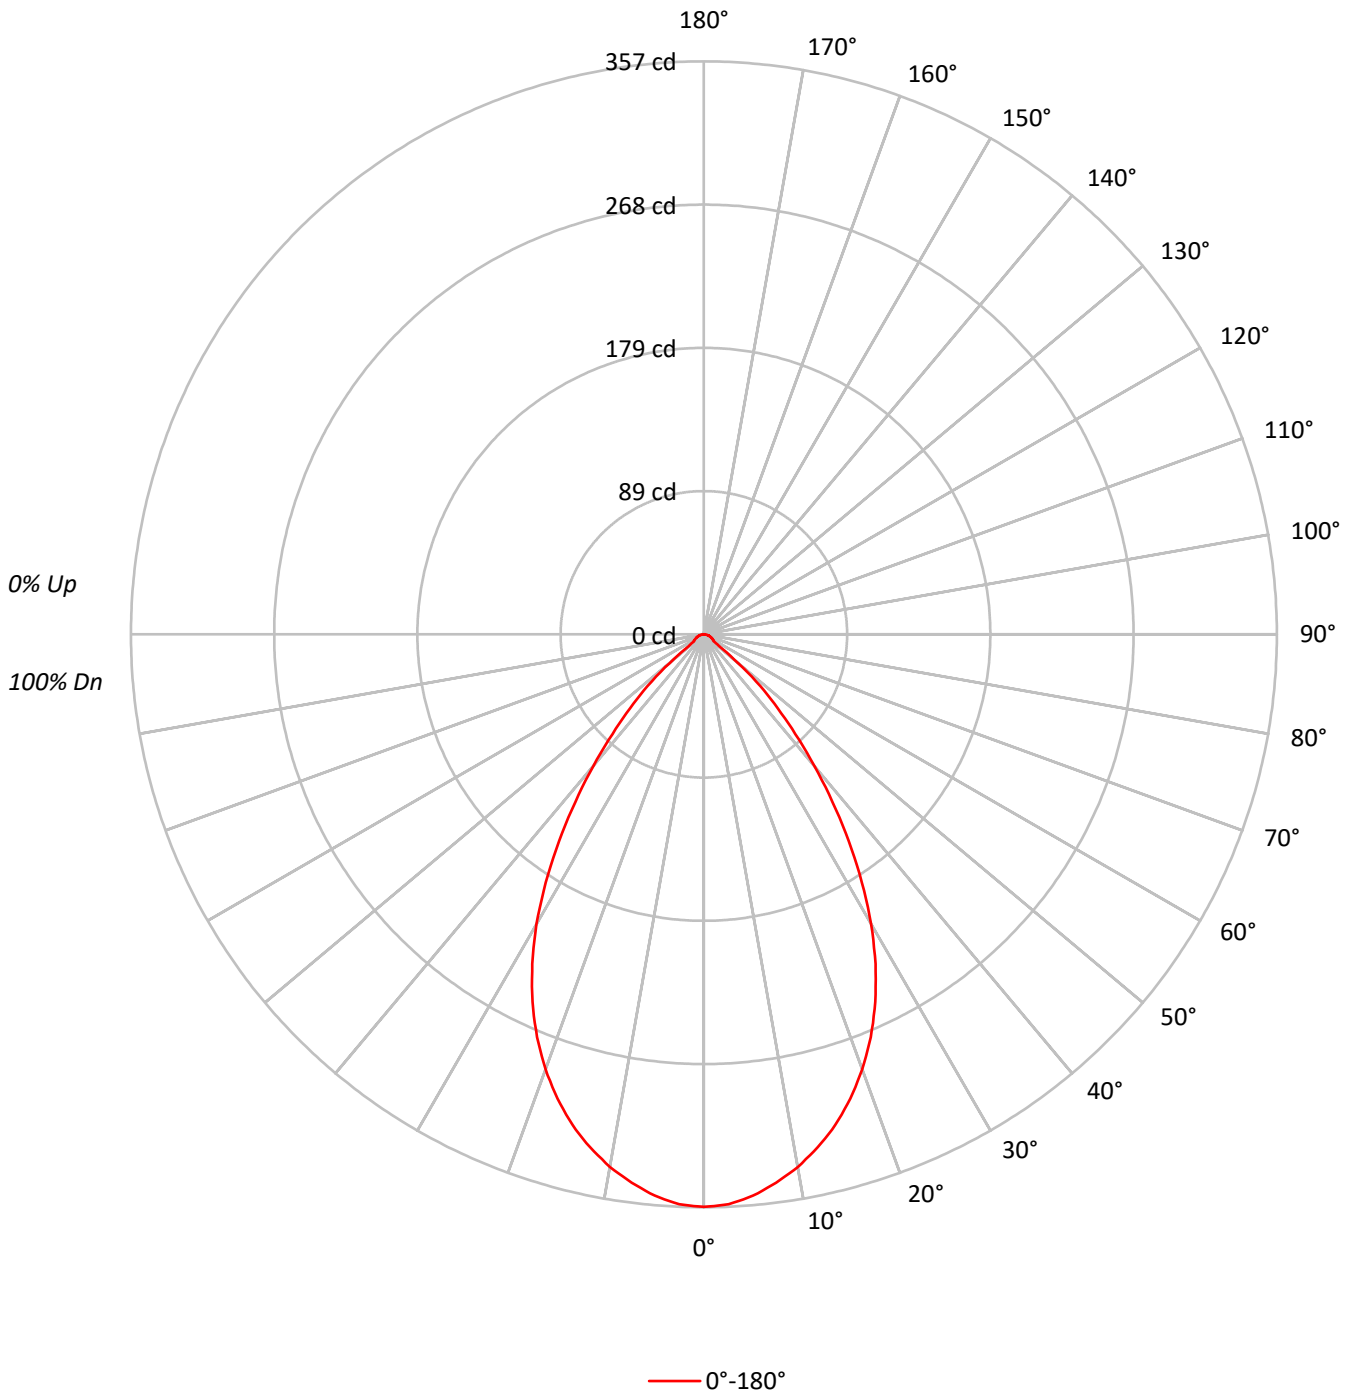



TEST NUMBER: P1291319

CATALOG NUMBER: P3AS05R70W2N902750DE010 E3DL1WMH_3500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	33.1	8.2
10°-20°	88.6	21.9
20°-30°	115.1	28.5
30°-40°	97.7	24.2
40°-50°	50.4	12.5
50°-60°	9.7	2.4
60°-70°	5.2	1.3
70°-80°	3.2	0.8
80°-90°	0.9	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	236.8	58.6
0°-40°	334.5	82.8
0°-60°	394.6	97.7
0°-90°	404.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	404.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	357	
5°	351	33
15°	316	89
25°	253	115
35°	157	98
45°	65	50
55°	8	10
65°	5	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1291319
CATALOG NUMBER: P3AS05R70W2N902750DE010 E3DL1WMH_3500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	356.7
2.5°	355.5
5°	351.1
7.5°	344.6
10°	337.0
12.5°	327.4
15°	316.5
17.5°	303.3
20°	288.5
22.5°	271.6
25°	252.8
27.5°	231.5
30°	208.6
32.5°	183.3
35°	157.3
37.5°	131.6
40°	107.1
42.5°	84.3
45°	65.0
47.5°	47.7
50°	27.7
52.5°	12.0
55°	7.6
57.5°	7.2
60°	6.4
62.5°	6.0
65°	5.2
67.5°	4.8
70°	4.0
72.5°	3.6
75°	3.2
77.5°	2.4
80°	2.0
82.5°	1.2
85°	0.8
87.5°	0.4
90°	0.0

(END OF REPORT)