

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1291474

Luminaire Tested: P3AS05R70W2N902765DE010 E3DLP1H_5000K

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1291474
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-45)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R70W2N902765DE010 E3DLP1H_5000K
Description: 3in Adjustable Tunable White LED luminaire with, R70 optic, 5000K CCT AND, 90CRI ,
E3DLP1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 287.0 lumens
Efficiency: N/A
Efficacy: 48.6 lumens/watt
Spacing Criteria (0/90/45): 0.82 / 0.82 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 5.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1291474
CATALOG NUMBER: P3AS05R70W2N902765DE010 E3DLP1H_5000K

Luminous Intensity Polar Plot

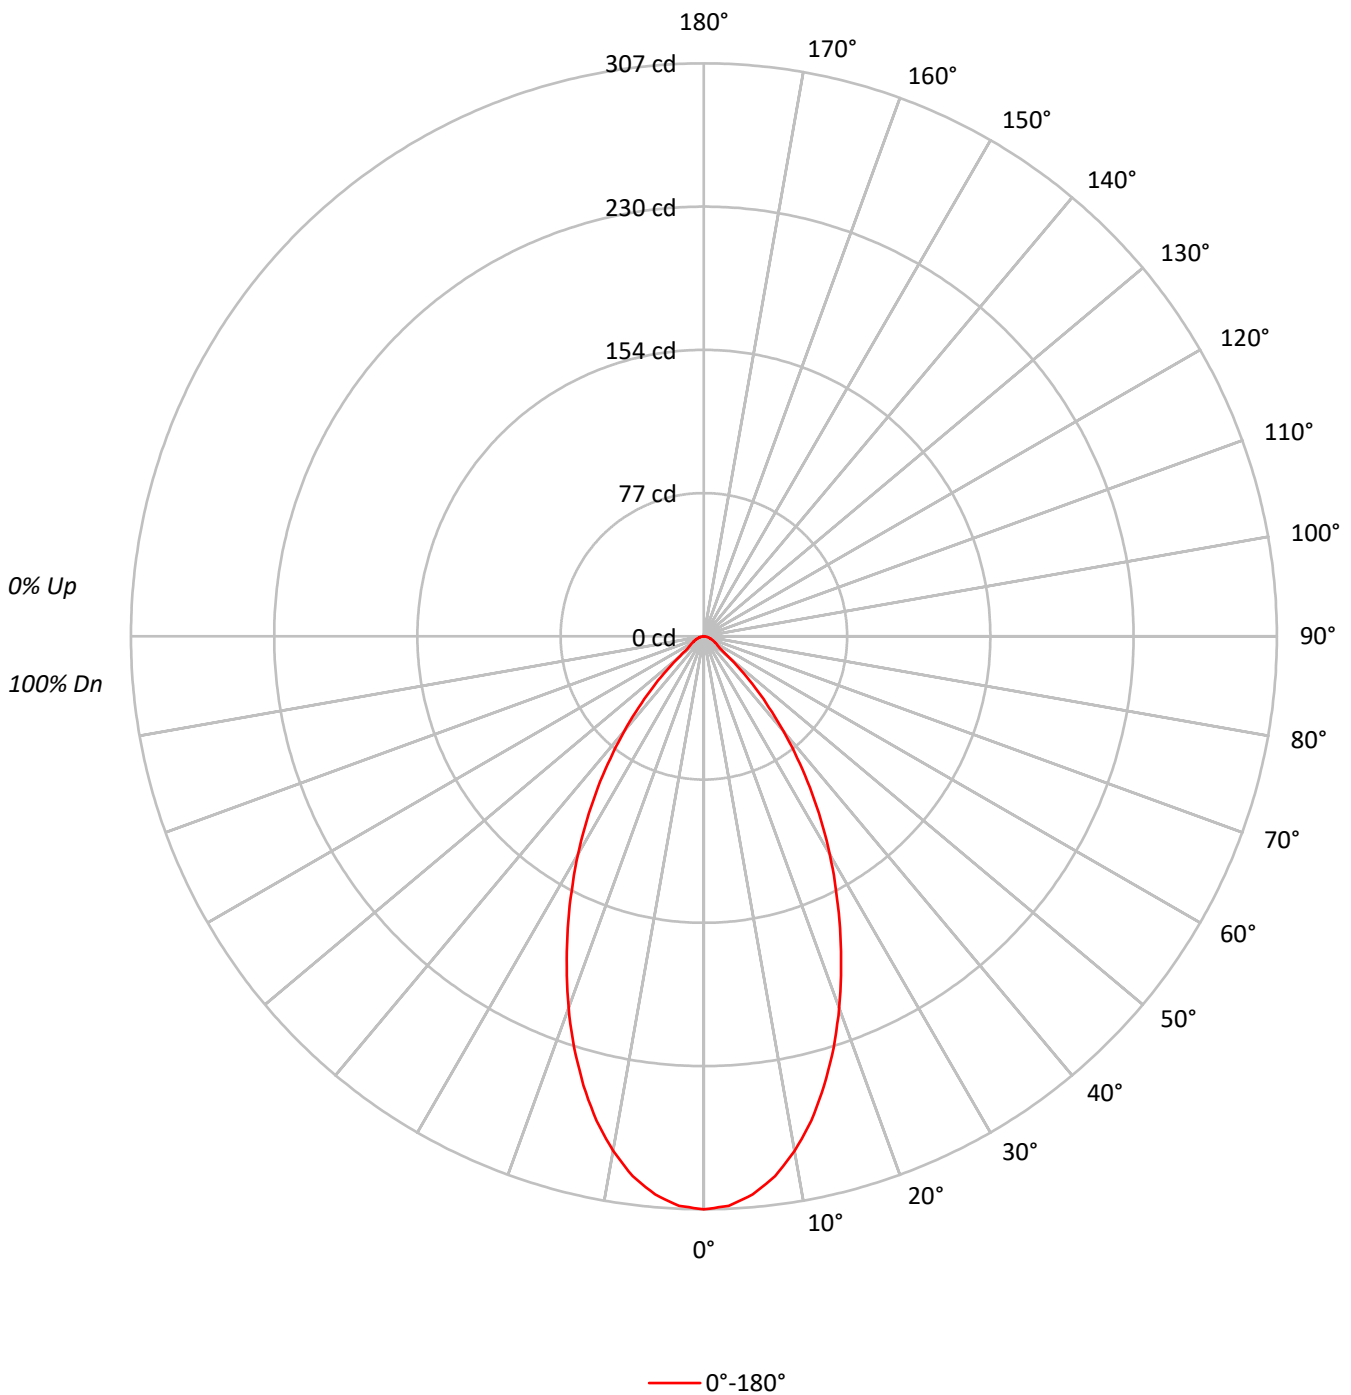



TEST NUMBER: P1291474
 CATALOG NUMBER: P3AS05R70W2N902765DE010 E3DLP1H_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	104	110	107	105	103	103	101	100	100	98	97	96	95	94	92	92	92	92
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	88	83	98	92	87	83	89	85	81	87	83	80	84	81	79	77	77	77	77
4	95	86	80	76	93	85	80	75	83	78	74	81	77	73	79	76	73	71	71	71	71
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65	65	65	65
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	65	62	61	61	61	61
7	80	70	64	59	79	69	63	59	68	62	58	67	62	58	66	61	58	56	56	56	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52	52	52	52
9	72	62	55	51	71	61	55	51	60	55	51	59	54	51	58	54	50	49	49	49	49
10	69	58	52	48	67	58	52	48	57	51	48	56	51	47	55	51	47	46	46	46	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	67319
5°	66080
10°	62323
15°	56550
20°	49471
25°	41736
30°	34157
35°	26502
40°	18978
45°	12001
50°	6004
55°	3670
60°	3158
65°	2906
70°	2565
75°	2372
80°	2020
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 12001 cd/sqm



TEST NUMBER: P1291474

CATALOG NUMBER: P3AS05R70W2N902765DE010 E3DLP1H_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	28.0	9.8
10°-20°	69.3	24.1
20°-30°	78.9	27.5
30°-40°	61.7	21.5
40°-50°	30.3	10.6
50°-60°	9.3	3.3
60°-70°	5.5	1.9
70°-80°	3.0	1.0
80°-90°	0.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	176.3	61.4
0°-40°	238.0	82.9
0°-60°	277.7	96.7
0°-90°	287.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	287.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	307	
5°	300	28
15°	249	69
25°	172	79
35°	99	62
45°	39	30
55°	10	9
65°	6	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1291474
CATALOG NUMBER: P3AS05R70W2N902765DE010 E3DLP1H_5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	307.0
2.5°	305.4
5°	300.2
7.5°	291.8
10°	279.9
12.5°	265.9
15°	249.1
17.5°	231.1
20°	212.0
22.5°	192.0
25°	172.5
27.5°	153.3
30°	134.9
32.5°	116.6
35°	99.0
37.5°	82.2
40°	66.3
42.5°	51.5
45°	38.7
47.5°	27.1
50°	17.6
52.5°	11.6
55°	9.6
57.5°	8.4
60°	7.2
62.5°	6.4
65°	5.6
67.5°	4.8
70°	4.0
72.5°	3.2
75°	2.8
77.5°	2.4
80°	1.6
82.5°	1.2
85°	0.8
87.5°	0.4
90°	0.0

(END OF REPORT)